

BMWG
Internet-Draft
Intended status: Informational
Expires: 30 August 2026

F. Calabria
Cisco
C. Pignataro
Blue Fern Consulting
Q. Wu
G. Fioccola
Huawei
26 February 2026

Benchmarking Methodology for AI Training Network Fabrics
draft-calabria-bmwg-ai-fabric-training-bench-00

Abstract

This document defines benchmarking terminology, methodologies, and Key Performance Indicators (KPIs) for evaluating Ethernet-based AI training network fabrics.

As large-scale distributed AI/ML training clusters grow to tens of thousands of accelerators (GPUs/XPUs), the backend network fabric becomes the critical bottleneck determining job completion time (JCT), training throughput, and accelerator utilization.

This document establishes vendor-independent, reproducible test procedures for benchmarking fabric-level performance under realistic AI training workloads, covering RDMA/RoCEv2 transport, the Ultra Ethernet Transport (UET) protocol defined by the UEC Specification 1.0 [UEC-1.0], congestion management (PFC, ECN, DCQCN, CBFC), load balancing strategies (ECMP, DLB, packet spraying), collective communication patterns (AllReduce, AlltoAll, AllGather), and scale/soak testing.

The methodology enables apples-to-apples comparison across different switch ASICs, vendor implementations, NIC transport stacks (RoCEv2 vs. UET), and fabric architectures (2-tier Clos, 3-tier Clos, rail-optimized).

About This Document

This note is to be removed before publishing as an RFC.

The latest revision of this draft can be found at <https://fcalabri.github.io/bmwg-ai-fabric-training-bench/draft-calabria-bmwg-ai-fabric-training-bench.html>. Status information for this document may be found at <https://datatracker.ietf.org/doc/draft-calabria-bmwg-ai-fabric-training-bench/>.

Discussion of this document takes place on the BMWG Working Group mailing list (<mailto:bmwg@ietf.org>), which is archived at <https://mailarchive.ietf.org/arch/browse/bmwg/>. Subscribe at <https://www.ietf.org/mailman/listinfo/bmwg/>.

Source for this draft and an issue tracker can be found at <https://github.com/fcalabri/bmwg-ai-fabric-training-bench>.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 30 August 2026.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	4
1.1. Requirements Language	5
1.2. Scope and Applicability	5
1.3. Relationship to Existing BMWG Work	5
2. Terminology and Definitions	6
3. Test Topology and Architecture	8
3.1. Reference Fabric Topologies	8

3.1.1.	Topology A: 2-Tier Clos (Leaf-Spine)	9
3.1.2.	Topology B: 3-Tier Clos (Leaf-Spine-Superspine)	9
3.1.3.	Topology C: Rail-Optimized	9
3.2.	Device Under Test (DUT) Identification	10
3.3.	Traffic Generator Requirements	11
3.3.1.	Mandatory Functional Capabilities	11
3.3.2.	Minimum Measurement Accuracy Requirements	11
3.3.3.	Acceptable Implementations	12
4.	KPI Framework and Metrics Taxonomy	12
4.1.	Primary KPIs	12
4.2.	Secondary KPIs	13
4.3.	Fabric Health Indicators	14
5.	Test Category 1: RDMA Transport Benchmarks	14
5.1.	Baseline Throughput	14
5.2.	Latency Characterization	15
5.3.	Back-to-Back Burst Absorption	15
6.	Test Category 1A: UEC Transport Protocol Benchmarks	16
6.1.	UET Throughput by Transport Service	16
6.2.	UET Latency Characterization	17
6.3.	Packet Spray Efficacy Under UET RUD	17
6.4.	UET Congestion Control Benchmarks	18
6.5.	Link Layer Enhancement Benchmarks	19
6.6.	UET Collective Communication Performance	19
6.7.	UET PDC Scalability and Connection Setup Rate	20
7.	Test Category 2: Congestion Management	20
7.1.	ECN Marking Accuracy and Threshold	20
7.2.	PFC Behavior Under Incast	21
7.3.	DCQCN Convergence Time	21
7.4.	PFC Storm and Deadlock Resilience	21
8.	Test Category 3: Load Balancing Efficacy	21
8.1.	ECMP Entropy and Polarization	21
8.2.	Dynamic Load Balancing (Flowlet)	22
8.3.	Packet Spraying	22
8.4.	Jain Fairness Index Measurement	22
9.	Test Category 4: Collective Communication Benchmarks	22
9.1.	AllReduce Benchmark	23
9.2.	AlltoAll Benchmark	23
9.3.	AllGather Benchmark	23
9.4.	Collective Communication Library Bus Bandwidth Summary	23
10.	Test Category 5: Job Completion Time (JCT) Benchmarks	24
10.1.	Synthetic JCT Under Controlled Conditions	24
10.2.	MLPerf-Aligned JCT	25
10.3.	Multi-Tenant JCT Interference	25
11.	Test Category 6: Scale and Convergence	26
11.1.	Fabric Scale Limits	26
11.2.	Link Failure Convergence	26
11.3.	Zero-Impact Failover Measurement	26
12.	Test Category 7: Soak and Stability	26

12.1. 24-Hour Sustained Load	27
12.2. Resource Leak Detection	27
13. Reporting Format	27
14. Security Considerations	28
15. IANA Considerations	28
16. References	28
16.1. Normative References	28
16.2. Informative References	29
Appendix A. KPI-to-Test Mapping Summary	30
Appendix B. ASIC Feature Categories (Informational)	33
Appendix C. RoCEv2 Test Frame Format	35
Appendix D. UET (Ultra Ethernet Transport) Frame Format	35
D.1. Key Differences from RoCEv2	37
Acknowledgments	38
Authors' Addresses	38

1. Introduction

The rapid growth of distributed AI/ML training workloads has fundamentally changed the performance requirements for data center network fabrics. Unlike traditional data center traffic characterized by diverse flow sizes and protocols, AI training workloads generate highly synchronized, bandwidth-intensive, east-west traffic patterns dominated by collective communication operations (AllReduce, AlltoAll, AllGather). These workloads impose unique demands: lossless transport (via RoCEv2 over RDMA), ultra-low tail latency, near-perfect load balancing across all fabric paths, and the ability to absorb coordinated micro-bursts from thousands of accelerators simultaneously.

Existing BMWG methodologies, while foundational, do not adequately address the characteristics of AI training fabrics. [RFC2544] defines benchmarking for general network interconnect devices but does not account for RDMA transport semantics, collective communication patterns, or the unique congestion dynamics of GPU-to-GPU traffic. [RFC8238] and [RFC8239] establish data center benchmarking terminology and methodology but predate the AI fabric paradigm and do not address RoCEv2-specific behaviors such as Priority Flow Control (PFC) interactions, DCQCN congestion control convergence [DCQCN-PAPER], or the impact of load balancing strategies on Job Completion Time (JCT). Industry experience deploying RoCEv2 at scale [META-ROCE] further highlights the need for standardized benchmarking methodology.

The EVPN benchmarking methodology [EVPN-BENCH] provides a structural template for service-oriented benchmarking but is scoped to L2VPN services rather than RDMA fabrics.

This document fills the gap by defining a comprehensive benchmarking methodology specifically designed for AI training network fabrics.

1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

1.2. Scope and Applicability

This document applies to Ethernet-based AI training backend network fabrics employing RoCEv2 and/or UEC Ultra Ethernet Transport (UET) protocols. The scope includes leaf-spine (2-tier Clos) and leaf-spine-superspine (3-tier Clos) topologies.

InfiniBand fabrics are explicitly *out of scope*, though many KPIs defined herein may be adapted for IB benchmarking by future documents. The DUT is the network fabric itself (the collection of switches and interconnecting links), not individual accelerators or host NICs, though host-side configuration MUST be documented as it materially affects results.

The methodology is designed for controlled laboratory environments per the BMWG charter; it is NOT intended for production network measurement.

1.3. Relationship to Existing BMWG Work

Document	Relationship
[RFC1242]	Base terminology for network benchmarking; terms reused herein
[RFC2544]	Base methodology; throughput/latency/loss tests adapted for RDMA
[RFC2889]	LAN switching methodology; MAC learning concepts adapted for ARP/ND scale
[RFC8238]	Data center terminology; buffer, congestion, and microburst terms extended
[RFC8239]	Data center methodology; line-rate and buffer tests adapted for RoCEv2

[RFC9004]	Back-to-back frame updates; burst absorption methodology referenced
[LLM-BENCH]	Complementary document benchmarking the inference serving stack. Treats the network as opaque SUT. This document benchmarks the fabric itself. The two documents MAY be used together but MUST NOT be combined in a single benchmarking report without explicit section demarcation.
[UEC-1.0]	UET protocol specification; transport services, congestion control, and link-layer enhancements benchmarked in Section 6

Table 1: Relationship to Existing BMWG Work

2. Terminology and Definitions

The following terms are defined for use in this document. Where a term overlaps with [RFC1242] or [RFC8238], the definition herein takes precedence in the context of AI fabric benchmarking.

Term	Definition
AI Fabric	The dedicated Ethernet backend network interconnecting accelerators (GPUs/XPUs) for distributed AI training, typically a non-blocking Clos topology running RoCEv2
JCT (Job Completion Time)	The wall-clock duration from start to completion of a training job, inclusive of all computation and communication phases
DUT Fabric	All leaf switches, spine switches, superspine switches (if applicable), and interconnecting links forming the AI training fabric
Roofline JCT	Theoretical minimum JCT assuming perfect (zero-contention) network behavior
JCT Ratio	Measured JCT / Roofline JCT; 1.0 = no network overhead; >1.0 = fabric inefficiency

BusBW (Bus Bandwidth)	Effective per-accelerator throughput during a collective: (data_size x algo_factor) / time
QP (Queue Pair)	RDMA communication endpoint (Send Queue + Receive Queue); multiple QPs per src-dst pair increase ECMP entropy
Incast Ratio	Ratio of senders to receivers (e.g., N:1 incast)
MMR (Max-Mean Ratio)	Flow count on most-loaded link / average flow count; quantifies ECMP imbalance (1.0 = perfect)
PFC Pause Event	Single PFC PAUSE frame transmitted on a priority class
ECN Marking Ratio	% of packets marked with Congestion Experienced (CE) over a measurement interval
Collective Operation	Coordinated cross-accelerator communication: AllReduce, AlltoAll, AllGather
DCQCN	Data Center Quantized Congestion Notification: ECN + PFC for end-to-end congestion control with RoCEv2
Packet Spray	Load balancing distributing individual packets across all ECMP paths; maximizes utilization but may cause reordering
DLB/Flowlet	Dynamic Load Balancing using flowlet detection; reroutes traffic at flow idle gaps
Zero-Impact Failover	Sub-microsecond path convergence upon link/switch failure with no measurable JCT impact
UET (Ultra Ethernet Transport)	Connectionless RDMA transport defined by UEC Spec 1.0; designed as next-generation replacement for RoCEv2
PDC (Packet	Ephemeral, connectionless UET transport

Delivery Context)	endpoint; analogous to but distinct from an RDMA QP
ROD	Reliable Ordered Delivery: UET service semantically equivalent to RoCEv2 RC mode
RUD	Reliable Unordered Delivery: UET service enabling native packet spray without receiver reorder buffer overhead
RUDI	Reliable Unordered Delivery for Idempotent operations; simplified retransmission for RDMA Writes
UUD	Unreliable Unordered Delivery: best-effort UET service for telemetry/speculative operations
LLR (Link Layer Retry)	Optional UEC per-hop error recovery (sub-microsecond) at the Ethernet link layer
Packet Trimming	Optional UEC enhancement; congested switches transmit packet header only instead of dropping the full packet
CBFC (Credit-Based Flow Control)	Optional UEC per-destination flow control; alternative to PFC that avoids head-of-line blocking
UEC Profile	Defined UET feature subset: AI Base, AI Full, or HPC
Entropy Value	Explicit per-packet UET field for ECMP path selection; improves multipath utilization vs. 5-tuple hashing

Table 2: Terminology and Definitions

3. Test Topology and Architecture

3.1. Reference Fabric Topologies

Three reference topologies are defined. All tests MUST specify which topology is used. Results obtained under different topologies are NOT directly comparable without normalization.

3.1.1. Topology A: 2-Tier Clos (Leaf-Spine)

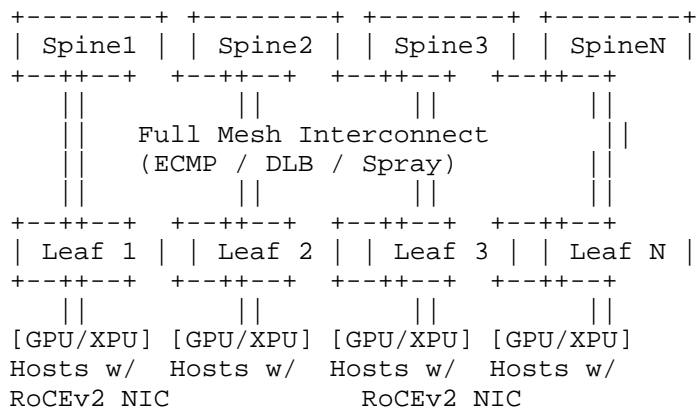


Figure 1: Topology A: 2-Tier Clos (Leaf-Spine)

The DUT boundary encompasses all leaf and spine switches and their interconnecting links. Traffic generators or actual GPU hosts connect at the leaf layer.

3.1.2. Topology B: 3-Tier Clos (Leaf-Spine-Superspine)

For clusters exceeding thousands of accelerators, a superspine layer is added. Each pod consists of a leaf-spine fabric; pods interconnect via superspine switches. This topology scales to 32,000+ accelerators at 800GbE with current-generation ASICs. The DUT boundary encompasses all three tiers.

3.1.3. Topology C: Rail-Optimized

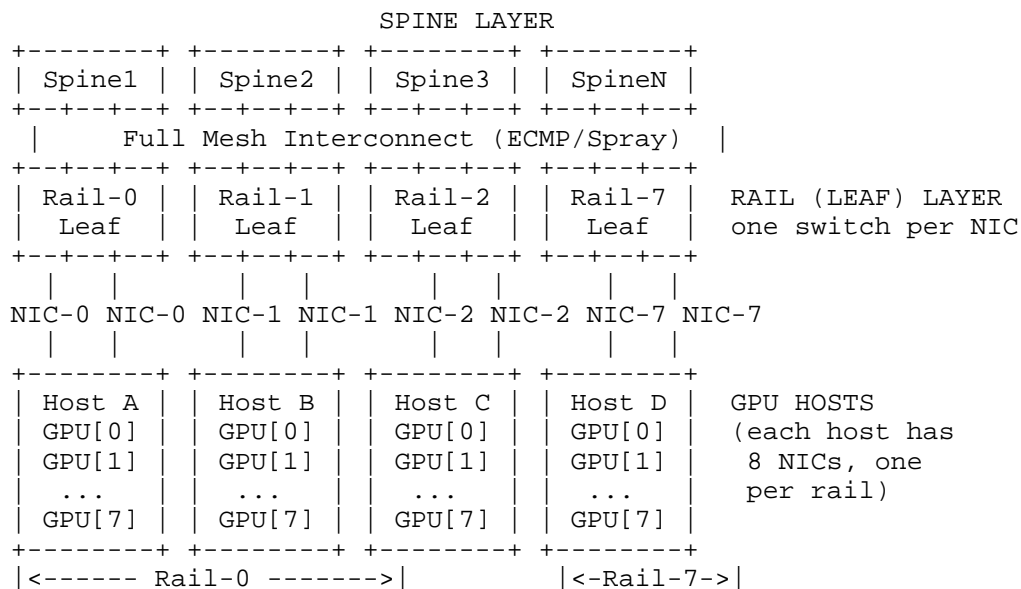


Figure 2: Topology C: Rail-Optimized

In rail-optimized topologies, each NIC on a multi-NIC host connects to a dedicated leaf switch ("rail"), co-optimizing network locality with the collective communication library (NCCL/RCCL). The DUT boundary and rail mapping MUST be fully documented.

3.2. Device Under Test (DUT) Identification

Parameter	Description	Example
Switch Vendor/Model	Vendor name, product family, model number	Vendor Family Model
Switch ASIC	Silicon vendor, ASIC family, revision	Silicon Vendor ASIC Family Rev
NOS Version	Network operating system name and version	NOS Name Version
Port Speed	Per-port line rate	400GbE, 800GbE
Buffer Architecture	Shared/dedicated, total buffer per ASIC/port	32MB shared + 16MB VOQ per port
Optics/	Transceiver type, cable	OSFP 400G-DR4, DAC 3m

Cables	type and length	copper	
+-----+	+-----+	+-----+	+-----+
NIC Vendor/ Model	RDMA NIC vendor, model, firmware	NIC Vendor Model Speed	
+-----+	+-----+	+-----+	+-----+
NIC Firmware	NIC firmware version	Firmware Version	
+-----+	+-----+	+-----+	+-----+
Host Config	OS, CCL lib version, driver, BIOS settings	OS Version, CCL Version, OFED Version	
+-----+	+-----+	+-----+	+-----+

Table 3: DUT Identification Parameters

3.3. Traffic Generator Requirements

3.3.1. Mandatory Functional Capabilities

The traffic generator MUST support: RoCEv2 transport emulation (QP establishment, RDMA Write/Read, ECN processing, DCQCN rate control); configurable QP scaling (1-256 QPs per source-destination pair); programmable collective communication patterns (AllReduce, AlltoAll, AllGather with configurable message sizes); and nanosecond-precision timestamping.

3.3.2. Minimum Measurement Accuracy Requirements

+-----+	+-----+
Parameter	Minimum Requirement
+-----+	+-----+
Timestamp accuracy	<= 100 nanoseconds
+-----+	+-----+
Frame rate accuracy	+/- 0.1% of specified rate
+-----+	+-----+
QP scaling range	1 to 256 QPs per src-dst pair
+-----+	+-----+
Message size range	1 KB to 8 GB
+-----+	+-----+
Flow counter resolution	Per-flow byte and packet counts
+-----+	+-----+
Loss measurement	0 ppm resolution
+-----+	+-----+
Burst generation	1-1000 frames at line rate
+-----+	+-----+

Table 4: Minimum Measurement Accuracy Requirements

3.3.3. Acceptable Implementations

Qualifying platforms: (a) dedicated hardware traffic generators at line-rate RDMA emulation meeting the accuracy requirements of Section 3.3.2, or (b) instrumented GPU clusters with RDMA tooling with fully documented host configuration. When GPU clusters are used, any non-fabric overhead **MUST** be quantified and reported separately.

4. KPI Framework and Metrics Taxonomy

Target values in this section are NON-NORMATIVE illustrative reference points derived from current industry practice. They do NOT constitute benchmarking acceptance criteria. Per BMWG charter, defining acceptance criteria is explicitly out of scope. Implementers MAY use these values as contextual references; they **MUST NOT** be used as pass/fail thresholds.

4.1. Primary KPIs

KPI	Unit	Definition	Reference Target (Non-Normative)
Job Completion Time (JCT)	seconds	Wall-clock time for benchmark iteration (compute + communication)	Minimize
JCT Ratio	dimensionless	Measured JCT / Roofline JCT	≤ 1.05 (≤ 1.15 acceptable)
Bus Bandwidth (BusBW)	Gbps/accelerator	Effective per-accelerator throughput during collective	$\geq 90\%$ of NIC line rate (intra-pod)
Aggregate Throughput	Tbps	Total fabric goodput during collective phase	$\geq 95\%$ of bisection BW
Packet Drop Rate	ppm	Frames lost end-to-end not	0 ppm (lossless)

		retransmitted	
Tail Latency (P99/P99.9)	us	99th/99.9th percentile one-way fabric latency	Minimize

Table 5: Primary KPIs

4.2. Secondary KPIs

KPI	Unit	Definition
ECN Marking Ratio	%	Percentage of packets marked CE over measurement interval
PFC Pause Count	events/sec	Rate of PFC PAUSE frames per priority per port
PFC Pause Duration	us	Cumulative time a port is in PFC-paused state per interval
RDMA Retransmission Rate	retx/sec	NIC-level retransmissions due to timeouts or NAKs
ECMP Imbalance (MMR)	dimensionless	Max-Mean Ratio of flow counts across parallel uplinks
Jain Fairness Index (JFI)	0.0-1.0	Fairness of traffic distribution; 1.0 = perfect
Queue Depth (P95/Max)	bytes or cells	95th percentile and maximum egress queue occupancy per port
Congestion Control Convergence	us	Time from congestion onset to DCQCN rate stabilization
Out-of-Order Packet Rate	pkt/sec	Packets delivered out of sequence (relevant for packet spray)
CTS/ACK Delay	us	Delay for control messages (Clear-to-Send, ACKs)

Table 6: Secondary KPIs

4.3. Fabric Health Indicators

Indicator	Unit	Definition
Switch CPU Utilization	%	Average and peak CPU usage on DUT control plane during test
Switch Memory Utilization	%	Average and peak memory usage, including FIB/MAC table occupancy
FIB/Route Convergence Time	ms	Time to converge routing after topology change
Link Flap Count	events	Spurious link state changes during test period
CRC/FCS Error Rate	errors/sec	Physical layer errors indicating cable or optics issues
Power Consumption	Watts	Per-switch and per-port power draw under test load

Table 7: Fabric Health Indicators

5. Test Category 1: RDMA Transport Benchmarks

These tests establish baseline fabric performance for RDMA traffic independent of collective communication patterns. They extend [RFC2544] and [RFC8239] methodology for RoCEv2 semantics.

5.1. Baseline Throughput

Objective: Determine the maximum sustainable RDMA Write throughput through the DUT fabric at each tested message size.

Procedure:

- * Configure N host pairs, each establishing Q Queue Pairs per pair
- * Initiate RDMA Write operations and measure aggregate goodput
- * Test MUST run for at least 60 seconds at each rate

- * Binary search per [RFC2544] Section 26.1 SHOULD be used
 - * Message sizes: 64B, 256B, 1KB, 4KB, 64KB, 256KB, 1MB, 4MB
 - * QP counts: 1, 4, 16, 32 per src-dst pair
 - * Test both unidirectional and bidirectional traffic
- *Reporting:* Report aggregate throughput (Tbps), per-port utilization (%), and throughput efficiency (measured/theoretical). Present as table indexed by message size x QP count, and as graph (message size on X-axis).

5.2. Latency Characterization

- *Objective:* Determine one-way and round-trip RDMA latency distribution at the throughput rate from Section 5.1.
- *Procedure:*
- * Inject tagged frames at 60s into a 120s stream (per [RFC2544] Section 26.2)
 - * Nanosecond-precision timestamping
 - * MUST report: min, mean, P50, P95, P99, P99.9, max
 - * Repeat at least 20 times; report averages
 - * Test under both zero-load (single QP) and loaded (full fabric utilization) conditions
- *Reporting:* Tabulate latency statistics per message size. Provide histogram and CDF plot. Report latency increase factor (loaded/unloaded).

5.3. Back-to-Back Burst Absorption

- *Objective:* Characterize the DUT fabric's ability to absorb back-to-back RDMA bursts without loss, extending [RFC9004] methodology for RoCEv2.
- *Procedure:*
- * Transmit bursts at line rate with minimum inter-frame gap
 - * Increase burst length until first frame loss is detected

- * Test incast ratios: 2:1, 4:1, 8:1, 16:1, 32:1

- * Repeat at least 50 times per burst length

Reporting: Report burst absorption capacity (frames and bytes) for each message size and incast ratio. Plot burst capacity vs. incast ratio.

6. Test Category 1A: UEC Transport Protocol Benchmarks

The Ultra Ethernet Consortium (UEC) Specification 1.0 [UEC-1.0] defines UET, a connectionless RDMA transport designed to replace RoCEv2 for AI/HPC workloads. All UET tests use the libfabric API [LIBFABRIC] and run on UEC 1.0-compliant NICs.

The UEC compliance profile (AI Base, AI Full, or HPC) used during testing MUST be documented.

6.1. UET Throughput by Transport Service

Objective: Determine maximum sustainable throughput under each UET transport service (ROD, RUD, RUDI, UUD) and compare to RoCEv2 RC/UC on the same DUT fabric.

Procedure: Use UEC 1.0-compliant NICs; establish PDCs; use libfabric fi_write. Apply binary search ([RFC2544] Section 26.1). Vary PDC counts: 1, 4, 16, 32. A parallel RoCEv2 test series MUST be executed. Both unidirectional and bidirectional configurations MUST be tested.

Reporting template:

Metric	ROD	RUD	RUDI	UUD	RoCEv2 RC	RoCEv2 UC
Throughput @ 1MB (Gbps)	(meas)	(meas)	(meas)	(meas)	(meas)	(meas)
Throughput @ 4MB (Gbps)	(meas)	(meas)	(meas)	(meas)	(meas)	(meas)
Efficiency (% line rate)	(meas)	(meas)	(meas)	(meas)	(meas)	(meas)
PDC/QP Setup Time (us)	(meas)	(meas)	(meas)	(meas)	(meas)	(meas)
Max Sustained PDC/QP Count	(meas)	(meas)	(meas)	(meas)	(meas)	(meas)

Table 8: UET Throughput by Transport Service

6.2. UET Latency Characterization

Objective: Measure latency distribution for UET transport services; quantify differential vs. RoCEv2, with particular attention to connectionless PDC establishment overhead.

Procedure: Measure latency for: (a) steady-state PDC transfers; (b) first-packet latency (PDC + first data packet, measuring "data before handshake"); (c) zero-load baseline. Test ROD and RUD separately to isolate reordering-related latency.

Reporting: Tabulate latency statistics per (transport_service, message_size, load_condition) tuple. Plot latency CDF for UET ROD, UET RUD, and RoCEv2 RC side-by-side.

6.3. Packet Spray Efficacy Under UET RUD

Objective: Quantify the load balancing improvement achieved by UET's native per-packet spray with RUD, which eliminates the receiver reorder buffer constraint.

Procedure: Test four configurations:

- * UET RUD + packet spray
- * UET ROD + packet spray
- * RoCEv2 RC + packet spray
- * RoCEv2 RC + standard ECMP (baseline)

Measure MMR, JFI, out-of-order delivery rate, retransmission rate, and effective goodput. Vary ECMP paths: 4, 8, 16, 32.

Reporting template:

Load Balancing Config	MMR	JFI	OOO Rate	Retx Rate	Effective Goodput (%)
UET RUD + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
UET ROD + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
RoCEv2 RC + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
RoCEv2 RC + ECMP (baseline)	(meas)	(meas)	(meas)	(meas)	(meas)
UET RUD + DLB/Flowlet	(meas)	(meas)	(meas)	(meas)	(meas)

Table 9: Packet Spray Efficacy Under UET RUD

UET RUD SHOULD achieve zero host-visible reordering despite per-packet spray because the transport layer natively tolerates unordered delivery.

6.4. UET Congestion Control Benchmarks

Objective: Evaluate UET's dual-sided (sender + receiver) congestion control under N:1 incast conditions vs. RoCEv2 DCQCN.

***Procedure:** Measure: (a) incast throughput at $N = \{2, 4, 8, 16, 32, 64\}$; (b) convergence time after doubling active senders (until all flows within 10% of fair share); (c) PFC avoidance with PFC disabled on the DUT; (d) receiver credit utilization.

***Reporting:** Tabulate incast throughput, convergence time, peak queue depth, PFC event count, and packet drop rate for UET vs. DCQCN per incast ratio. ***Critical differentiator:** report whether UET achieves zero application-visible loss without PFC.

6.5. Link Layer Enhancement Benchmarks

***Objective:** Measure performance impact of optional link-layer enhancements: LLR, Packet Trimming (PT), and CBFC.

***Procedure:**

- * ***(a) LLR Retry Latency:** inject controlled bit errors; measure LLR retry latency (expected sub-microsecond per hop) vs. transport-layer retransmission (~10-100us RTT). Run with 80% background load.
- * ***(b) Packet Trimming Effectiveness:** configure 2:1 oversubscription bottleneck; measure time from congestion onset to first retransmission request, bandwidth saved vs. full-packet drops.
- * ***(c) CBFC vs. PFC:** identical N:1 (N=32) incast scenarios; measure head-of-line blocking duration (CBFC is per-destination, PFC is per-priority), pause propagation hops, and throughput of non-congested flows.

***Reporting:** Before/after comparison table for each enhancement. Note which features are hardware-supported vs. software-emulated.

6.6. UET Collective Communication Performance

***Objective:** Measure collective communication (AllReduce, AlltoAll, AllGather) performance over UET and compare to RoCEv2.

***Procedure:** Execute the collective benchmark suite from Section 9 over UET RUD transport using a UEC-compliant collective library. Same accelerator count, message sizes, and fabric topology. Run UET RUD + packet spray as primary; UET ROD + ECMP as secondary baseline.

***Reporting template:**

Collective	Msg Size	N Accels	UET RUD BusBW	UET ROD BusBW	RoCEv2 RC BusBW	Delta UET/ RoCEv2
AllReduce	1GB	128	(meas)	(meas)	(meas)	(meas)
AllReduce	1GB	512	(meas)	(meas)	(meas)	(meas)
AlltoAll	1GB	128	(meas)	(meas)	(meas)	(meas)
AllGather	1GB	128	(meas)	(meas)	(meas)	(meas)

Table 10: UET Collective Communication Performance

6.7. UET PDC Scalability and Connection Setup Rate

Objective: Measure PDC establishment rate and maximum concurrent PDC count vs. RoCEv2 QP-based connections.

Procedure: (a) PDC establishment rate: initiate PDC creation to $M = \{100, 1000, 10000, 100000\}$ remote endpoints. (b) Data-before-handshake: measure first-byte latency for UET vs. RoCEv2 RDMA Write. (c) Maximum concurrent PDC count: scale until per-PDC throughput drops below 90% of single-PDC rate. The UEC specification targets up to 1 million endpoints.

7. Test Category 2: Congestion Management

AI training workloads generate repetitive micro-congestion during the back-propagation gradient synchronization phase.

7.1. ECN Marking Accuracy and Threshold

Objective: Verify that the DUT marks packets with ECN CE at the configured threshold with correct granularity.

Procedure: Configure threshold T on DUT egress queue. Verify: (a) no packets marked below T ; (b) 100% marked above maximum threshold; (c) appropriate WRED/RED probability ramp between thresholds. Test thresholds: low (~100KB), medium (~1MB), high (~5MB).

Reporting: Plot ECN marking probability vs. instantaneous queue depth. Report measured threshold accuracy (deviation from configured).

7.2. PFC Behavior Under Incast

Objective: Characterize DUT's PFC generation behavior under N:1 incast conditions.

Procedure: Generate N:1 incast at 100% line rate, $N = \{2, 4, 8, 16, 32, 64\}$. Measure PFC PAUSE frame count/sec per hop, PFC PAUSE duration per port, PFC storm onset, and end-to-end throughput. Test SHOULD verify correct headroom sizing and PFC watchdog effectiveness.

7.3. DCQCN Convergence Time

Objective: Measure time for DCQCN to converge to fair-share rate after congestion onset.

Procedure: Establish M flows through a common bottleneck. At T_0 , inject additional M flows (creating 2:1 oversubscription). Measure time until all 2M flows achieve rates within 10% of fair share. Repeat for $M = \{4, 16, 64, 256\}$. Vary DCQCN parameters and report sensitivity.

7.4. PFC Storm and Deadlock Resilience

Objective: Verify the DUT does not enter PFC deadlock or sustained PFC storm under adversarial traffic.

Procedure: Generate cyclic traffic patterns known to cause PFC deadlocks. Run for 300 seconds. The DUT MUST demonstrate resilience via PFC watchdog or architectural immunity (e.g., VOQ-based scheduling).

8. Test Category 3: Load Balancing Efficacy

Load balancing across parallel fabric paths is critical for AI training fabrics because the traffic consists of a small number of high-bandwidth, long-lived elephant flows.

8.1. ECMP Entropy and Polarization

Objective: Quantify traffic polarization under standard ECMP hashing for AI training flow patterns.

Procedure: Configure standard 5-tuple ECMP. Generate traffic with $Q = \{1, 4, 8, 16, 32\}$ QPs per src-dst pair. Measure per-link utilization, MMR, and JFI. Test with and without BTH-aware hashing. Repeat for fabric sizes of 8, 16, 32, and 64 leaf switches.

8.2. Dynamic Load Balancing (Flowlet)

Objective: Evaluate DUT's flowlet-based DLB performance and compare to baseline ECMP.

Procedure: Configure vendor-specific DLB (document algorithm type). Generate traffic with Q=4 QPs. Measure MMR, JFI, per-link utilization, out-of-order rate. Vary flowlet gap timer and report sensitivity.

8.3. Packet Spraying

Objective: Evaluate DUT's per-packet spraying performance and quantify the utilization vs. reordering tradeoff.

Procedure: Configure per-packet load balancing. Measure MMR (expected ~1.0), JFI (expected ~1.0), out-of-order rate, and RDMA retransmission impact. If the DUT provides an in-fabric reorder buffer, document per Appendix B.

8.4. Jain Fairness Index Measurement

Objective: Single-number summary of load balancing quality comparable across all strategies.

Formula:

$$JFI = (\text{Sum LinkTx}_i)^2 / (N \times \text{Sum LinkTx}_i^2)$$

Figure 3: Jain Fairness Index Formula

where LinkTx_i = transmitted traffic on fabric link i, N = total parallel links. Range: 1/N (worst) to 1.0 (perfect).

Reporting: Report JFI for each load balancing strategy. Provide bar chart comparing ECMP, DLB, and packet spray.

9. Test Category 4: Collective Communication Benchmarks

These tests evaluate the fabric's performance under realistic collective communication patterns. Unlike synthetic RDMA tests in Section 5 and Section 6, these exercise the full stack including the collective library (NCCL [NCCL], RCCL, or equivalent).

9.1. AllReduce Benchmark

Objective: Measure fabric performance during AllReduce operations -- the dominant collective for gradient synchronization in data-parallel training.

Procedure:

- * Message sizes: 1MB, 8MB, 64MB, 256MB, 1GB, 4GB
- * Accelerator counts: $N = \{8, 16, 32, 64, 128, 256, 512, 1024\}$
- * Execute at least 100 iterations per (message_size, N) pair
- * Report average, P50, P95, P99 BusBW
- * Run under each load balancing strategy (ECMP, DLB, spray)

9.2. AlltoAll Benchmark

Objective: Measure fabric performance during AlltoAll operations -- used in Mixture-of-Experts (MoE) models and expert parallelism.

Procedure: Execute AlltoAll with same parameters as Section 9.1. AlltoAll creates the worst-case congestion scenario: every accelerator simultaneously sends to every other. Report JCT per iteration -- the most sensitive indicator of fabric congestion management quality.

9.3. AllGather Benchmark

Objective: Measure fabric performance during AllGather operations -- used for parameter distribution in tensor-parallel and pipeline-parallel training.

Procedure: Execute AllGather with same parameter sweeps as Section 9.1. Measure BusBW, JCT, and fabric health indicators.

9.4. Collective Communication Library Bus Bandwidth Summary

Reporting template:

Load Balancing Config	MMR	JFI	OOO Rate	Retx Rate	Effective Goodput (%)
UET RUD + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
UET ROD + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
RoCEv2 RC + Packet Spray	(meas)	(meas)	(meas)	(meas)	(meas)
RoCEv2 RC + ECMP (baseline)	(meas)	(meas)	(meas)	(meas)	(meas)
UET RUD + DLB/ Flowlet	(meas)	(meas)	(meas)	(meas)	(meas)

Table 11: Collective Communication Bus Bandwidth Summary

10. Test Category 5: Job Completion Time (JCT) Benchmarks

JCT is the single most important user-facing KPI for AI training fabrics, directly determining accelerator utilization and training cost.

10.1. Synthetic JCT Under Controlled Conditions

Objective: Measure JCT for a defined synthetic workload with a known computation-to-communication ratio to isolate fabric-induced overhead.

Procedure: Define a synthetic training iteration as:

1. Computation phase of C milliseconds (simulated sleep or GPU compute kernel)
2. Communication phase: AllReduce of S bytes across N accelerators

Parameter	Values
Computation time C	10ms, 50ms, 100ms, 500ms
Message size S	256MB, 1GB, 4GB
Accelerator count N	64, 128, 256, 512, 1024
Iterations	1000

Table 12: Synthetic JCT Test Parameters

Roofline JCT = Iterations x (C + S x algo_factor / NIC_line_rate)
 JCT Ratio = Measured_JCT / Roofline_JCT

Figure 4: JCT Ratio Calculation

JCT Ratio < 1.05 = excellent fabric performance; > 1.15 = significant fabric-induced overhead.

10.2. MLPerf-Aligned JCT

***Objective:** Measure JCT using MLPerf Training benchmark workloads [MLPERF] to enable comparison with published industry results.

***Procedure:** Execute MLPerf Training closed-division workloads (e.g., BERT, ResNet, GPT-3 175B) per MLPerf submission rules. Simultaneously capture all fabric KPIs from Section 4. Report time-to-train and/or tokens-per-second.

10.3. Multi-Tenant JCT Interference

***Objective:** Quantify JCT impact when multiple training jobs share the same fabric.

***Procedure:** Configure two or more independent training jobs. Jobs SHOULD overlap in spine-layer link usage. Measure baseline JCT (isolated) and contention JCT (simultaneous).

JCT Interference Factor = Contention_JCT / Baseline_JCT

Figure 5: JCT Interference Factor

Test with spine link overlap: 0%, 25%, 50%, 75%.

11. Test Category 6: Scale and Convergence

11.1. Fabric Scale Limits

Objective: Determine the maximum fabric scale at which the DUT maintains acceptable KPI performance.

Procedure: Progressively increase active accelerator endpoints from N=64 to maximum topology support while running AllReduce (Section 9.1, S=1GB). At each scale point record JCT Ratio, BusBW, ECN ratio, PFC count, CPU and memory utilization. Also measure BGP/routing convergence time after clearing all adjacencies (analogous to [EVPN-BENCH] Sections 3.10, 3.11, 4.9, 4.10).

11.2. Link Failure Convergence

Objective: Measure traffic disruption and JCT impact when a fabric link fails during active training.

Procedure: With the fabric fully loaded (AllReduce, N=128, S=1GB), administratively fail a spine uplink. Measure:

- * Duration of packet loss
- * Packets lost
- * JCT overhead for the failure iteration vs. steady state
- * Time for load balancing mechanism to redistribute flows

Repeat for: leaf uplink failure, spine switch failure, superspine link failure (if applicable). Test under each load balancing strategy.

11.3. Zero-Impact Failover Measurement

Objective: Verify vendor claims of zero-impact or sub-microsecond failover.

Procedure: Execute Section 11.2 with nanosecond-precision measurement. A failure is considered "zero-impact" if the measured JCT for the failure iteration is within the P99 JCT of steady-state iterations.

12. Test Category 7: Soak and Stability

12.1. 24-Hour Sustained Load

***Objective:** Verify DUT fabric stability under sustained AI training load over an extended period, following the methodology pattern from [EVPN-BENCH] Sections 3.12, 4.11.

***Procedure:** Configure DUT at maximum validated scale from Section 11.1. Generate bidirectional collective communication traffic (alternating AllReduce and AlltoAll). Run continuously for 24 hours. Sample all KPIs from Section 4 every 60 seconds.

There SHOULD NOT be any memory leaks, crashes, or CPU spikes. Any anomaly MUST be reported with timestamp and duration.

***Reporting:** Time-series plots of JCT Ratio, BusBW, ECN ratio, PFC count, CPU, and memory over the 24-hour period. Report standard deviation of JCT Ratio (stability metric).

12.2. Resource Leak Detection

***Objective:** Detect memory leaks, handle exhaustion, or gradual performance degradation in DUT software.

***Procedure:** Record per-process memory usage at T=0, T=1h, T=6h, T=12h, T=24h. Compute linear regression slope of memory usage over time. A slope exceeding *1MB/hour* for any process indicates a potential memory leak and MUST be reported. Also monitor forwarding-plane counter wraparounds and hardware table occupancy trends.

13. Reporting Format

Test reports MUST include the following sections:

1. ***DUT Identification:** Complete parameters from Section 3.2 for all fabric components.
2. ***Test Topology:** Diagram and description per Section 3.1, including physical cabling.
3. ***Test Configuration:** All DUT configuration parameters: QoS policies (ECN thresholds, PFC headroom, DCQCN parameters), load balancing mode, buffer allocation, and vendor-specific tuning.

4. ***Host Configuration:** Complete host stack description per Section 3.2 including NIC firmware, driver, collective library version, and any tuning. For UET tests, additionally report: UEC compliance profile, libfabric provider version, NIC UEC firmware version, and enabled optional link-layer features (LLR, Packet Trimming, PRI, CBFC).
5. ***Test Results:** For each test from Section 5 through Section 12, provide specified tables, graphs, and statistical summaries. For Section 6 tests, results **MUST** include side-by-side UET vs. RoCEv2 comparison data on the identical DUT fabric.
6. ***Anomalies:** Any deviations from specified procedures, test failures, or unexpected behaviors **MUST** be documented.
7. ***Repeatability Statement:** Report iteration count and coefficient of variation (std deviation / mean) for each test's primary metric. CV below 5% is **RECOMMENDED** for test validity.

14. Security Considerations

This document defines benchmarking methodologies for controlled laboratory environments and does not introduce new security mechanisms or protocols.

Per [RFC6815], the tests defined herein **MUST NOT** be performed on production networks. The use of dedicated test IP address ranges per [RFC2544] Appendix C (198.18.0.0/15) is **RECOMMENDED** to prevent accidental interaction with production infrastructure.

When RDMA/RoCEv2 traffic is used, the test environment **SHOULD** be isolated from production RDMA fabrics to prevent QP number space collisions or inadvertent PFC propagation. When UET traffic is used (Section 6), the test environment **MUST** ensure that UDP port 4793 traffic does not leak to production networks and that PDC identifier spaces are isolated. UET's optional transport security sub-layer (TSS) **SHOULD NOT** be enabled during performance benchmarking unless transport security overhead is explicitly being measured.

15. IANA Considerations

This document makes no request of IANA.

16. References

16.1. Normative References

- [RFC1242] Bradner, S., "Benchmarking Terminology for Network Interconnection Devices", RFC 1242, DOI 10.17487/RFC1242, July 1991, <<https://www.rfc-editor.org/rfc/rfc1242>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/rfc/rfc2119>>.
- [RFC2544] Bradner, S. and J. McQuaid, "Benchmarking Methodology for Network Interconnect Devices", RFC 2544, DOI 10.17487/RFC2544, March 1999, <<https://www.rfc-editor.org/rfc/rfc2544>>.
- [RFC2889] Mandeville, R. and J. Perser, "Benchmarking Methodology for LAN Switching Devices", RFC 2889, DOI 10.17487/RFC2889, August 2000, <<https://www.rfc-editor.org/rfc/rfc2889>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/rfc/rfc8174>>.
- [RFC8238] Avramov, L. and J. Rapp, "Data Center Benchmarking Terminology", RFC 8238, DOI 10.17487/RFC8238, August 2017, <<https://www.rfc-editor.org/rfc/rfc8238>>.
- [RFC8239] Avramov, L. and J. Rapp, "Data Center Benchmarking Methodology", RFC 8239, DOI 10.17487/RFC8239, August 2017, <<https://www.rfc-editor.org/rfc/rfc8239>>.
- [RFC9004] Morton, A., "Updates for the Back-to-Back Frame Benchmark in RFC 2544", RFC 9004, DOI 10.17487/RFC9004, May 2021, <<https://www.rfc-editor.org/rfc/rfc9004>>.
- [UEC-1.0] Ultra Ethernet Consortium, "Ultra Ethernet Transport (UET) Specification 1.0", June 2025, <<https://ultraethernet.org>>.

16.2. Informative References

- [DCQCN-PAPER] Zhu, Y., "Congestion Control for Large-Scale RDMA Deployments", DOI ACM SIGCOMM 2015, 2015, <https://doi.org/ACM_SIGCOMM_2015>.

[EVPN-BENCH]

Jacob, S. and K. Tiruveedhula, "Benchmarking Methodology for EVPN and PBB-EVPN", Work in Progress, Internet-Draft, draft-ietf-bmwg-evpntest-11, August 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-bmwg-evpntest-11>>.

[LIBFABRIC]

OpenFabrics Interfaces Working Group, "libfabric: Open Fabric Interfaces", n.d., <<https://ofiwg.github.io/libfabric/>>.

[LLM-BENCH]

Gaikwad, et al, "Benchmarking Methodology for Large Language Model Serving", Work in Progress, Internet-Draft, draft-gaikwad-llm-benchmarking-methodology-00, January 2026, <<https://datatracker.ietf.org/doc/html/draft-gaikwad-llm-benchmarking-methodology-00>>.

[META-ROCE]

Gangidi, A., "RDMA over Ethernet for Distributed AI Training at Meta Scale", DOI ACM SIGCOMM 2024, 2024, <[https://doi.org/ACM SIGCOMM 2024](https://doi.org/ACM%20SIGCOMM%2024)>.

[MLPERF]

MLCommons, "MLPerf Training Benchmark Suite", n.d., <<https://mlcommons.org>>.

[NCCL]

NVIDIA, "NVIDIA Collective Communications Library (NCCL)", n.d., <<https://developer.nvidia.com/nccl>>.

[RFC6815]

Bradner, S., Dubray, K., McQuaid, J., and A. Morton, "Applicability Statement for RFC 2544: Use on Production Networks Considered Harmful", RFC 6815, DOI 10.17487/RFC6815, November 2012, <<https://www.rfc-editor.org/rfc/rfc6815>>.

Appendix A. KPI-to-Test Mapping Summary

KPI	Test Section	Measurement Method	Reporting Unit
Throughput Rate	Section 5.1	Binary search, zero-loss	Tbps, % line rate
Latency (P99)	Section 5.2	Tagged frame, loaded / unloaded	us

Burst Absorption	Section 5.3	Max burst without loss	frames, bytes
ECN Accuracy	Section 7.1	Queue depth vs. marking	threshold deviation %
PFC Behavior	Section 7.2	Incast sweep N=2..64	PAUSE events/sec, duration
DCQCN Convergence	Section 7.3	Rate stabilization after onset	us
PFC Deadlock	Section 7.4	Cyclic adversarial traffic	observed/ reported, watchdog events
ECMP Imbalance	Section 8.1	MMR, JFI per QP count	dimensionless ratios
DLB Efficacy	Section 8.2	Throughput delta vs. ECMP	%, out-of-order rate
Spray Efficacy	Section 8.3	JFI, retransmission rate	dimensionless, retx/sec
AllReduce BusBW	Section 9.1	CCL benchmark	Gbps per accelerator
AlltoAll JCT	Section 9.2	CCL benchmark	seconds per iteration
AllGather BusBW	Section 9.3	CCL benchmark	Gbps per accelerator
Synthetic JCT Ratio	Section 10.1	Measured / Roofline	dimensionless
MLPerf JCT	Section 10.2	Time-to-train	minutes, tokens/sec
Multi-Tenant Impact	Section 10.3	Contention / Baseline JCT	interference factor
Scale Limit	Section 11.1	Max N with JCT Ratio characterized	accelerator count

Failover Time	Section 11.2	Loss duration on link fail	us
24h Stability	Section 12.1	JCT Ratio std deviation	dimensionless
UET Throughput (RUD)	Section 6.1	Binary search per transport service	Gbps, % line rate
UET First-Packet Latency	Section 6.2	PDC establish + first data	us
UET Spray Efficacy	Section 6.3	JFI/MMR under RUD spray	dimensionless, 000 rate
UET PFC-Free Loss Rate	Section 6.4	Incast without PFC enabled	%, retx overhead
LLR Retry Latency	Section 6.5	Per-hop error recovery time	nanoseconds
Packet Trimming Savings	Section 6.5	BW saved during congestion	% bandwidth
CBFC vs PFC HOL Blocking	Section 6.5	Head-of-line blocking duration	us
UET Collective BusBW	Section 6.6	AllReduce/AlltoAll over UET	Gbps per accelerator
PDC Establishment Rate	Section 6.7	Sustained PDC creation rate	PDCs/second
Max Concurrent PDCs	Section 6.7	Scale limit per NIC	count

Table 13: KPI-to-Test Mapping Summary

Appendix B. ASIC Feature Categories (Informational)

This appendix identifies ASIC feature categories relevant to AI fabric performance. Implementers SHOULD document which categories are present and enabled on the DUT. Specific vendor names are intentionally omitted.

Feature Category	Sub-types	Relevance to AI Fabric	What to Report
Aggregate Switching BW	ASIC-level capacity	Cluster scale, bisection BW	Total Tbps; per-port speed (400/800GbE)
Buffer Architecture	Shared, VOQ, Cut-through	Microburst absorption, PFC behavior, lossless operation	Buffer type; total bytes; shared vs. dedicated split; per-port/queue allocation
Packet Distribution	Per-flow, Per-packet, Flowlet	ECMP load balancing quality and reordering risk	Supported granularities; in-fabric reorder buffer (yes/no)
Congestion Control	ECN marking, PFC, DCQCN	DCQCN convergence and lossless behavior	ECN granularity (port/queue/VOQ); PFC priorities; DCQCN parameter range
Adaptive Routing	Flowlet, ECMP, Spray, Topology-aware	Load balancing quality under collective patterns	Algorithm type; flowlet gap timer range; topology-aware support
Telemetry	Per-port, Per-queue, Per-flow	Required for KPI measurement during benchmarking	Monitoring granularity; streaming interval; INT support
Cluster Scale Support	2-tier, 3-tier	Applicable topology scales	Max cluster size per topology; ASIC count

Table 14: ASIC Feature Categories

All values MUST be reported based on vendor documentation or measured capability. Additional DUT capabilities affecting benchmark results MUST also be documented.

Appendix C. RoCEv2 Test Frame Format

Offset	Field	Size	Value / Description
00	Ethernet Dst MAC	6B	DUT next-hop MAC
06	Ethernet Src MAC	6B	Test equipment MAC
12	EtherType	2B	0x8100 (802.1Q) or 0x0800 (IPv4)
14	VLAN Tag (optional)	4B	PCP=3 (RoCEv2 priority), VID
18	IPv4 Header	20B	DSCP=26 (ECN-capable), Proto=17 (UDP)
38	UDP Header	8B	DstPort=4791 (RoCEv2), SrcPort=var
46	BTH (Base Transport Header)	12B	OpCode, DstQP, PSN, P_Key
58	RETH (if Write)	16B	VA, R_Key, DMA Length
74	Payload	var	Test data (incrementing octets)
var	ICRC	4B	Invariant CRC
var+4	FCS	4B	Ethernet Frame Check Sequence

Table 15: RoCEv2 Test Frame Format

Appendix D. UET (Ultra Ethernet Transport) Frame Format

UET runs over UDP/IP using IANA-assigned destination port 4793.

Offset	Field	Size	Value / Description
00	Ethernet Dst MAC	6B	DUT next-hop MAC
06	Ethernet Src MAC	6B	Test equipment MAC
12	EtherType	2B	0x8100 (802.1Q) or 0x0800 (IPv4)
14	VLAN Tag (optional)	4B	PCP=3 (UET priority class), VID
18	IPv4 Header	20B	DSCP=26, ECN=ECT(0), Proto=17 (UDP)
38	UDP Header	8B	DstPort=4793 (UET), SrcPort=entropy
46	UET Common Header	16B	Version, OpCode, PDC ID, PSN, Entropy Value, Flags
62	SES Header (Semantic)	var	Operation-specific (Write/Send/etc.)
var	PDS Header (Pkt Delivery)	var	Sequence, Credit, Ack fields
var	CMS Header (Cong. Mgmt)	var	ECN feedback, rate signals
var	Payload	var	Application data
var	ICRC	4B	Invariant CRC
var+4	FCS	4B	Ethernet Frame Check Sequence

Table 16: UET Frame Format

D.1. Key Differences from RoCEv2

Field	RoCEv2 Value	UET Value	Notes
UDP Dst Port	4791	4793	IANA-assigned for each protocol
Transport Endpoint	QP Number (24b)	PDC ID (variable)	Connectionless in UET
Sequence Number	PSN (24b)	PSN (extended)	Larger range for RUD 000 tolerance
Congestion Signal	ECN bits only	ECN + CMS sub-header	Sender + receiver signals in UET
Entropy Source	UDP src port	Explicit entropy field	Deterministic spray in UET
Ordering Guarantee	Always in-order (RC)	Per-service (ROD/RUD)	RUD allows 000 delivery
Min Header Overhead	~74B (Write)	~78B (est. Write)	Slight increase for sub-layer headers

Table 17: RoCEv2 vs. UET Comparison

1. *UDP Destination Port:* UET uses port 4793 vs. RoCEv2 port 4791.
2. *Entropy Value:* Explicit entropy field for ECMP path selection. Test equipment MUST vary this field to achieve uniform path distribution.
3. *Transport Service Indicator:* Header encodes transport service (ROD/RUD/RUDI/UUD). Tests MUST set this to match the service being benchmarked.
4. *PDC Identifier:* Connectionless PDC ID replaces RoCEv2's Destination QP. Test equipment MUST track PDC lifecycle for accurate measurement.
5. *Layered Sub-Headers:* UET uses four sub-layers (SES, PDS, CMS, TSS) with variable-length headers. Implementations MUST follow [UEC-1.0] Section 4 for wire format details.

6. *Optional Link Layer Headers:* When LLR, Packet Trimming, or PRI features are enabled, additional link-layer framing may be present. Test equipment MUST be configured to recognize and parse these.

Acknowledgments

Contributions and review are solicited from the BMWG mailing list (bmwg@ietf.org). The BMWG chairs and Area Director are identified at <https://datatracker.ietf.org/group/bmwg/about/>.

Authors' Addresses

Fernando Calabria
Cisco
Email: fcalabri@cisco.com

Carlos Pignataro
Blue Fern Consulting
Email: carlos@bluefern.consulting

Qin Wu
Huawei
Email: bill.wu@huawei.com

Giuseppe Fioccola
Huawei
Email: giuseppe.fioccola@huawei.com