

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: 24 July 2026

B. Brinckman
R. Mohan
Cisco Systems
B. Sanford
Philips
20 January 2026

An Application Layer Interface for Non-Internet-Connected Physical
Components (NIPC)
draft-ietf-asdf-nipc-16

Abstract

This memo describes an API that allows applications to perform operations against a gateway serving one or more devices described by an SDF model. The document describes a RESTful application layer interface to perform operations on those devices, as well as a CBOR-based publish-subscribe interface for streaming data.

About This Document

This note is to be removed before publishing as an RFC.

Status information for this document may be found at
<https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/>.

Discussion of this document takes place on the A Semantic Definition Format for Data and Interactions of Things Working Group mailing list (<mailto:asdf@ietf.org>), which is archived at <https://mailarchive.ietf.org/arch/browse/asdf/>. Subscribe at <https://www.ietf.org/mailman/listinfo/asdf/>.

Source for this draft and an issue tracker can be found at
<https://github.com/ietf-wg-asdf/asdf-nipc>.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 24 July 2026.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	4
1.1. Motivation	5
1.2. Non-IP Gateway	6
1.3. Terminology	8
1.4. Glossary	8
2. Architecture	9
2.1. Overview	9
2.1.1. Device instance information	10
2.1.2. Device class information	11
2.2. NIPC Registrations	11
2.2.1. SDF model registrations	11
2.2.2. Data application registrations	12
2.3. NIPC Operations	12
2.3.1. Overview	12
2.3.2. Properties	13
2.3.3. Actions	13
2.3.4. Events	13
2.3.5. Triggers	13
2.3.6. Groups	14
2.3.7. Connection management for NIPC Operations	14
2.3.8. Extensions	14
2.4. Events publish subscribe interface	14
2.5. Paths	15
2.5.1. General	15
2.5.2. NIPC Registrations	16

2.5.3. NIPC Operations	16
2.6. Schema	17
2.6.1. SDF model registrations	17
2.6.2. NIPC Operations	17
2.6.3. Parameters	18
2.6.4. Responses	19
3. NIPC Registration APIs	21
3.1. SDF model registrations APIs	21
3.1.1. Register an SDF model	21
3.1.2. Get all SDF models	22
3.1.3. Get an SDF model	23
3.1.4. Delete an SDF model	23
3.1.5. Update an SDF model	24
3.2. Data application registrations APIs	25
3.2.1. Register a data application	26
3.2.2. Update a data application	29
3.2.3. Get a data application	30
3.2.4. Delete a data application	30
4. NIPC Operation APIs	31
4.1. NIPC Property APIs	31
4.1.1. Update one or multiple values	32
4.1.2. Read one or multiple values	34
4.2. NIPC Event APIs	35
4.2.1. Enable event reporting	36
4.2.2. Disable event reporting	37
4.2.3. Get status of one or more events	37
4.2.4. Enable event reporting on a group of devices	38
4.2.5. Disable event reporting on a group of devices	39
4.2.6. Get event status on a group of devices	41
4.3. NIPC Action APIs	43
4.3.1. Perform an action	43
4.3.2. Check action status	44
4.4. NIPC trigger APIs	45
4.4.1. Create a trigger on a device	46
4.4.2. Delete a trigger on a device	47
4.4.3. Get installed triggers for a device	47
4.4.4. Create a trigger on a group of devices	49
4.4.5. Delete a trigger on a group of devices	50
4.4.6. Get installed triggers for a group of devices	50
4.5. NIPC explicit connection management APIs	52
4.5.1. Protocol Information Object	52
4.5.2. Connect to a device	54
4.5.3. Update a connection	57
4.5.4. Disconnect from a device	60
4.5.5. Get connection status	60
5. NIPC Extensibility	62
5.1. Protocol mappings	62
5.2. API extensions	62

6.	NIPC Error Handling	63
7.	Publish/Subscribe Interface	65
7.1.	CDDL Definition	65
7.2.	CBOR Examples	67
8.	Examples	68
8.1.	Property Read/Write	68
8.2.	Enabling an Event on a Device	70
8.3.	Enabling an Event on a Group of Devices	73
9.	Implementation Status	75
9.1.	TieDie IoT	76
9.2.	Cisco Sensor Connect for IoT Services (Catalyst)	76
9.3.	Cisco Sensor Connect for IoT Services (Meraki)	77
9.4.	NIPC Prototype	77
10.	Security Considerations	77
10.1.	Payload Encryption Considerations	77
10.2.	TLS Support Considerations	78
10.3.	HTTP Considerations	78
10.4.	Authorization Considerations	78
10.4.1.	API authorization Considerations	78
10.4.2.	Authorization Token/Bearer Token/Cookie Considerations	78
10.5.	Other Security Considerations	79
11.	IANA Considerations	79
11.1.	Media Type Registration	80
11.2.	API extensions	81
11.3.	Well-known URIs	82
11.4.	Problem Details for NIPC APIs	83
12.	References	85
12.1.	Normative References	86
12.2.	Informative References	89
Appendix A.	OpenAPI definition	89
Appendix B.	Protocol Mapping	130
Appendix C.	Protocol Information	130
C.1.	Protocol Information for BLE	131
C.2.	Protocol Information for Zigbee	134
Appendix D.	NIPC API extensions	136
D.1.	NIPC API write binary blob extension	136
D.2.	NIPC API bulk operations extension	138
D.3.	NIPC API write file extension	148
D.4.	NIPC API conditional read extension	154
D.5.	NIPC API conditional event extension	159
D.6.	NIPC API property extensions	165
Appendix E.	NIPC API CDDL Definition	169
Appendix F.	Example SDF model with protocol mappings for BLE	177
Authors' Addresses	181

1. Introduction

1.1. Motivation

Low-power sensors, actuators, and other connected devices deployed for building management, healthcare, workplace, manufacturing, logistics, and hospitality use cases are often resource and battery constrained. Many lack native IP connectivity and instead attach via heterogeneous non-IP operational networks. Common non-IP protocols include BLE [BLE53] and Zigbee [Zigbee22]. When IP is available, constrained application protocols such as CoAP [RFC7252] may be used. These devices still need to exchange data with IP-based applications. Accordingly, applications on the IP network obtain telemetry from and issue operations to such devices through an application-layer gateway. This gateway bridges the application network and one or more separate operational networks where devices are connected, allowing applications on the IP network to perform operations on devices connected to these other operational networks.




Figure 1: Gateway for non-Internet-Connected Devices

There have been efforts to define Gateway functions for devices that support a particular protocol, such as a BLE GATT REST API for BLE Gateways ([Gatt-REST-API]), however they have been limited to a single protocol or a particular use case. In absence of an open standard describing how applications on an IP network communicate with devices on other operational networks, bespoke and vendor-specific implementations have proliferated. Each deployment then requires: (1) defining or adapting yet another API, and (2) deploying additional gateway functions, increasing operational and integration cost. This specification defines a single, extensible application layer interface for cross-network and cross-protocol device interaction through a network gateway. The intent is to support multiple network and network protocols (and versions) concurrently, allow incremental addition of new protocols via mapping, and reduce redundant infrastructure by enabling multiple applications to share one standardized gateway function.

A standardized Application Layer Gateway interface has the following benefits:

1. Eliminates repeated bespoke integration effort across deployments.

2. Avoids deploying multiple overlapping gateway functions for different networks, protocols or use cases.
3. Reduces time and operational cost to integrate new networks and devices.

1.2. Non-IP Gateway

A Non-Internet-Connected Physical Components (NIPC) gateway is an application layer gateway (ALG) that implements APIs for applications to communicate with devices on different networks, leveraging different protocols. These NIPC APIs consist of reading or writing properties of devices, invoking actions on devices, as well as enabling or disabling events on devices.

In order to perform NIPC operations on a device, 2 prerequisites must be fulfilled:

- * The gateway has access to a device object, that contains its identity, in the form of a unique UUID and any credentials/trust material required to communicate with the device. Provisioning this device object is out of scope of this document. It may be performed via SCIM [RFC7644] with [I-D.ietf-scim-device-model].
- * An interaction model for the class of devices must be available to the gateway. This allows the gateway to understand how to interact with the device in a protocol-neutral way. The interaction model is provided to the gateway by means of an SDF model, described in [I-D.ietf-asdf-sdf].

Once these prerequisites are met, the gateway can resolve a referenced SDF affordance into the protocol-specific operations required for that device.

A NIPC gateway provides the following functions:

- * Authentication and authorization of application clients that will leverage the NIPC APIs.
- * Maintain a repository of device objects.
- * Accept and validate SDF interaction model registrations.
- * Expose APIs for property, action, and event operations.
- * Perform implicit connection management to devices where required; optionally support explicit connection management.

- * Stream events (publish/subscribe) to authorized data applications.
- * Proxy payloads between networks without interpreting or modifying application data.
- * Operate one or more channels to supported wired or wireless networks.
- * Optionally provide a bridge between devices on one or more device networks connected to the NIPC-Gateway. This may include translating between different protocols, if multiple protocols are supported on the device network(s).

The gateway’s role is to proxy traffic between application and device networks; it is not intended to be middleware that inspects, decodes, or transforms device payloads.

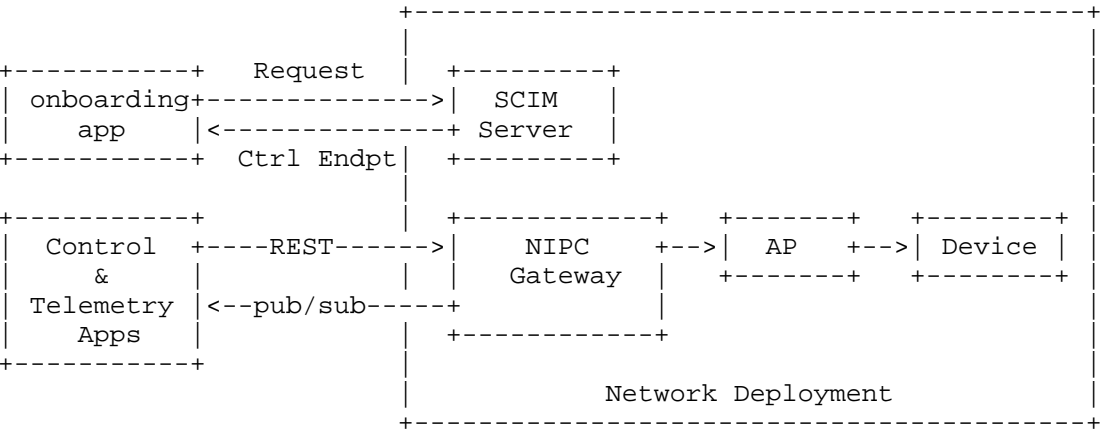


Figure 2: Basic Architecture

Figure 2 illustrates the basic components: applications, the NIPC application-layer gateway (ALG), an access point (AP), and a device (D). The applications, ALG, and AP reside on an IP network; the AP provides a wireless or wired interface to the device. Applications often operate in a different administrative domain than the ALG and AP, so the ALG will have to support authorization. The ALG bridges the IP application domain and the device network, be it an IP-based or non-IP device network. This enables applications to perform operations on devices attached to those device networks. Applications use a JSON-based [RFC8259] RESTful NIPC APIs for property, action, and event operations, and a CBOR-based [RFC8949] publish/subscribe interface for event streaming.

1.3. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

1.4. Glossary

- * NIPC: Non-IP Control, the application layer interface defined in this document.
- * NIPC Gateway: An application layer gateway that implements the NIPC interface.
- * SDF: Semantic Device Format, a standardized format to describe devices and their interaction models, as defined in [I-D.ietf-asdf-sdf].
- * SDF Affordance: An interaction point on a device as defined in an SDF model. Examples of affordances are properties, actions & events.
- * SDF Global Name: Absolute URI (with fragment) identifying an SDF affordance.
- * SCIM: System for Cross-domain Identity Management, a standardized protocol to manage identity information, as defined in [RFC7644].
- * ALG: Application Layer Gateway.
- * IoT: Internet of Things.
- * Protocol Mapping / sdfProtocolMap: Mapping from protocol-neutral SDF affordances to protocol-specific operations.
- * BLE: Bluetooth Low Energy protocol.
- * Zigbee: Low-power mesh networking protocol.
- * GATT: Generic Attribute Profile used in BLE for services/characteristics/descriptors.
- * Service (BLE): Top-level GATT grouping of characteristics.
- * Characteristic (BLE): GATT data element supporting read/write/notify.

- * Descriptor (BLE): Metadata element attached to a characteristic.
- * Bonding (BLE): Procedure to establish trusted, reusable security keys.
- * Service Discovery (BLE): Procedure to enumerate GATT services/characteristics/descriptors.
- * Device ID / Group ID: UUID identifying a device or a group of devices.
- * UUID: Universally unique identifier (128-bit).
- * Data Application / Data App: Registered application receiving streamed event data.
- * MQTT: Publish/subscribe messaging protocol used for streaming.
- * Webhook: HTTP callback endpoint for push delivery.
- * WebSocket: Bidirectional TCP-based message channel over HTTP.
- * Publish/Subscribe Interface: Streaming channel for events (CBOR-encoded payloads).
- * CBOR: Concise Binary Object Representation; compact binary data format.
- * CDDL: Concise Data Definition Language; schema language for CBOR data.
- * JSON: JavaScript Object Notation; text encoding used for API payloads.
- * Access Point (AP): Network element with a radio interface communicating with devices.

2. Architecture

2.1. Overview

A Non-Internet-Connected Physical Components (NIPC) gateway is an application-layer gateway (ALG) that exposes APIs enabling applications to perform operations on devices attached to networks connected to the gateway. NIPC defines two API categories:

- * Registrations: register SDF models for classes of devices and register data applications that receive streaming event data.

- * Operations: perform protocol-neutral device interactions (read/write properties, invoke actions, enable/disable events) across heterogeneous networks and protocols.

To execute NIPC operations on a device, both prerequisites **MUST** be met:

1. The NIPC gateway has access to device instance information: The device object contains its identity, in the form of a unique UUID and any credentials/trust material required to communicate with the device (e.g., via SCIM [RFC7644] with [I-D.ietf-scim-device-model]). This device object is identified by the device ID referenced in NIPC API paths.
2. The NIPC gateway has access to an interaction model (device class information): An SDF model [I-D.ietf-asdf-sdf] is registered, providing protocol-neutral affordances and mappings to protocol-specific operations.

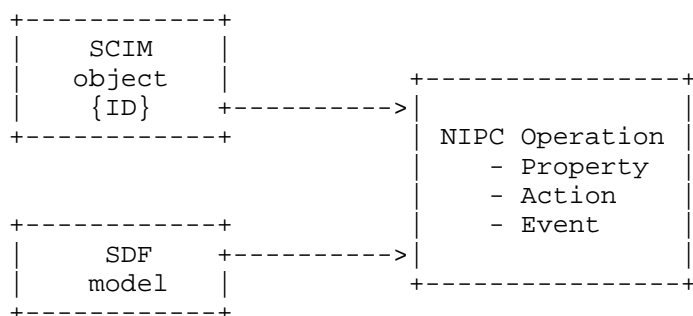


Figure 3: NIPC prerequisites

Once both prerequisites are met, authorized applications can perform NIPC operations on devices identified by their IDs. See Section 10 for authorization details. NIPC operations act on SDF affordances—properties, actions, and events—defined in the registered SDF model. Certain NIPC operations may also be performed on groups of devices identified by a group ID.

2.1.1.1. Device instance information

In order for the NIPC gateway to perform operations on a device, it must have access to the device's instance information. This includes the device's identity and any credentials or trust material required to communicate with the device. The device object **MUST** include a unique identity (UUID) and sufficient information to bootstrap trust and establish connectivity, as NIPC operations assume connectivity

can be established without separate API calls. While provisioning devices instance information can be performed in various ways, it is RECOMMENDED to use SCIM [RFC7644] with the device schema [I-D.ietf-scim-device-model], which defines the necessary attributes and extensions to support NIPC. As per Section 4.2 of [RFC7643], group objects may also be declared, and leveraged in NIPC operations.

2.1.2. Device class information

Device class information is declared through SDF models. These SDF models define the protocol-neutral affordances of a class of devices, as well as protocol mappings that relate these affordances to protocol-specific operations. The SDF model for a class of devices can be registered through NIPC registration APIs, as described in Section 2.2.

The SDF model reference and/or data-app registration MAY also be included in a device's SCIM object. See [I-D.ietf-scim-device-model] and [I-D.ietf-asdf-sdf-protocol-mapping] for details.

2.2. NIPC Registrations

NIPC registration APIs allow applications to register objects that are not tied to specific device instances.

NIPC supports two registration types:

1. SDF model registration: Registers an SDF interaction model for a class of devices.
2. Data application authorization: Authorizes an application to receive streaming event data.

2.2.1. SDF model registrations

The SDF model for a class of devices determines how a gateway can interact with these devices in a protocol-neutral way. To enable this, the SDF model must contain protocol mappings, mapping protocol-neutral SDF affordances to protocol-specific operations as defined in [I-D.ietf-asdf-sdf-protocol-mapping]. The SDF affordances supported by the device, as well as its protocol-mappings, are provided to the gateway by means of SDF model registration. SDF models are described in [I-D.ietf-asdf-sdf].

2.2.2. Data application registrations

NIPC operations can enable or disable event reporting on a device. Events are reported through a publish-subscribe interface. Applications that are authorized to perform NIPC operations on devices can define which applications are permitted to receive streaming event data for that device. The data-app registrations API maps an event to an application that is authorized to receive that data. The registration also defines what protocol will be used to deliver the data (e.g., MQTT, webhook, websocket). This registration basically allows applications to determine which data-streams are consumed by which data-applications.

2.3. NIPC Operations

2.3.1. Overview

NIPC APIs are exposed over HTTP [RFC9110]. Requests and responses use JSON [RFC8259] unless another media type is negotiated via Content-Type and Accept. A media type for an SDF affordance can also be stipulated in the SDF ContentFormat data quality, as described in Section 4.7 of [I-D.ietf-asdf-sdf]. The default media type is "application/nipc+json" (see Section 11.1). SDF model registrations use "application/sdf+json". Property APIs MAY use other media types appropriate to the property payload.

Failures use Problem Details [RFC9457] with application/problem+json.

NIPC operations are protocol-neutral operations on SDF affordances, more specifically properties, actions & events. NIPC operations can happen against affordances registered in an SDF model. Operations reference affordances by their SDF global name. If the underlying protocol requires a connection, the gateway establishes and tears down the connection implicitly unless an explicit connection is already in place.

NIPC exposes four operation groups:

- * Properties APIs: These APIs allow applications to perform operations on properties, such as to read or write values to them.
- * Actions APIs: These APIs perform actions on devices, such as enabling or disabling a feature on a device.
- * Events APIs: These APIs allow apps to enable or disable event reporting on devices. Events are reported over the events publish/subscribe interface.

- * Trigger APIs: These APIs allow an action or an event on one device to trigger an action on another device.

2.3.2. Properties

Property operations allow clients to read and write values for SDF properties.

Requests and responses use application/nipc+json unless another media type is negotiated via Content-Type and Accept. When using JSON, binary property values are base64-encoded with padding per Section 5 of [RFC4648]. Multiple properties MAY be read or written in a single request. When a single property is addressed via a query parameter, non-JSON media types MAY be used for the payload. On success, the response returns either 200 with per-property status (JSON) or 204 No Content for single, non-JSON writes.

2.3.3. Actions

Action operations invoke SDF actions on devices.

A successful action request returns 202 Accepted with a Location header referencing the action instance. Clients poll the instance URI to obtain status (e.g., IN_PROGRESS, COMPLETED). Request bodies are optional and MAY carry action input in a media type appropriate to the underlying protocol (e.g., octet-stream).

2.3.4. Events

Event operations enable and disable device event reporting.

Enabling an event returns 201 Created with a Location header referencing the event instance. Disabling an event uses the instance identifier and returns 204 No Content on success (for a single device) or 200 Success with a per-device status list (for a group). Event payloads are delivered via the publish/subscribe interface encoded in CBOR [RFC8949].

2.3.5. Triggers

Triggers allow an action or an event on one device to trigger an action on another device. Triggers are not protocol-specific. As an example, an event on a BLE device can trigger an action on a Zigbee device.

Creating a trigger returns 201 Created with a Location header referencing the trigger instance. Deleting a trigger uses the instance identifier and returns 204 No Content on success (for a single device) or 200 Success with a per-device trigger list (for a group).

2.3.6. Groups

Where supported by the underlying protocol, operations MAY target a group of devices identified by a group ID. Responses for group operations return per-device results; failures for individual devices are reported using Problem Details entries within the array.

2.3.7. Connection management for NIPC Operations

For protocols that require connection setup, the gateway performs implicit connection management during an operation (establish on demand; tear down on completion). Gateways MAY support explicit connection management; when an explicit connection is active, operations reuse it and do not tear it down. Explicit connection management is described in Section 4.5.

2.3.8. Extensions

NIPC supports API extensions for compound or specialized operations. Extensions can execute a set of NIPC operations in a single request or provide more efficient mechanisms for specific use cases (e.g., a bulk operation).

Extensions MUST use the “/extensions” path element. To ensure interoperability, extensions MUST be registered with IANA as defined in Section 11.2.

2.4. Events publish subscribe interface

Events are delivered via a publish/subscribe interface. NIPC events are encoded in CBOR ([RFC8949]) and can be transported over MQTT, Webhook or Websocket.

CBOR is used for the publish/subscribe interface as Non-IP payloads are typically binary. CBOR encodes binary payloads efficiently, and is more compact than JSON, therefore reducing the amount of data that needs to be transmitted to the application.

Event types include:

- * Streaming data from devices: Streaming data is activated/deactivated with the NIPC events API

- * Broadcasts from devices (e.g., advertisements in BLE)
- * Connection events: Devices connecting & disconnecting

2.5. Paths

2.5.1. General

The NIPC HTTP protocol is described in terms of a path relative to a Base URI. The Base URI **MUST NOT** contain a query string, as clients **MAY** append additional path information and query parameters as part of forming the request. The base URI is a URL that most often consists of the "https" protocol scheme, a domain name, and an initial path [RFC3986]. That initial path for NIPC is recommended to be /nipc. For example:

```
"https://example.com/nipc/"
```

Additionally a version number may be added, for example:

```
"https://example.com/nipc/v1/"
```

After the base or version number, the path must contain a collection identifier. The collection identifier can be one of the following:

- * /registrations: for NIPC registration APIs
- * /devices: for NIPC operations on devices
- * /groups: for NIPC operations on groups of devices
- * /extensions: for NIPC extension APIs

The well-known URI /.well-known/nipc defined in Section 11.3 can be used to discover the base path of the NIPC APIs and the supported versions and extensions. The response to a GET request on this URI **MUST** be a JSON document that contains the base path, and optionally the supported versions and extension APIs. The paths **MUST** be a URI template as defined in [RFC6570]. The following is an example of a template defining the NIPC base path as well as supported extensions on a server.

```
<CODE BEGINS>
{
  "base_path": "/nipc",
  "versions": [
    "/v1"
  ],
  "extensions": [
    "/extensions/{id}/bulk",
    "/extensions/{id}/properties/blob",
    "/extensions/{id}/properties/file",
    "/extensions/{id}/properties/read/conditional",
    "/extensions/{id}/events/conditional",
    "/extensions/{id}/properties/write"
  ]
}
<CODE ENDS>
```

Figure 4: Example response for /.well-known/nipc

A formal CBOR definition of the well-known response is as follows:

```
<CODE BEGINS> file "nipc_well_known.cddl"
NipcWellKnown = {
  base_path: text,
  ? versions: [* uri / text],
  ? extensions: [* uri / text]
}
<CODE ENDS>
```

2.5.2. NIPC Registrations

Registrations leverage the base path + /registrations. NIPC supports SDF model registrations and data-app registrations.

paths:

- * /registrations/models
- * /registrations/data-apps

2.5.3. NIPC Operations

Every NIPC Operations API pertains to either a device or group of devices, identified by an ID, hence the ID must be reflected as the first parameter in the path. For example:

```
"https://example.com/nipc/v1/{id}"
```


The second parameter in the path refers to the NIPC operation that the API will perform on the device. This can be:

- * properties
- * events
- * actions
- * triggers
- * extensions

These are described in Section 2.3.

2.6. Schema

The NIPC schema leans heavily on the SDF schema, as defined in [I-D.ietf-asdf-sdf]. NIPC operations map directly to SDF affordances.

2.6.1. SDF model registrations

To execute NIPC operations, an SDF interaction model for the device class **MUST** be registered. The model **MUST** include protocol mappings that relate protocol-neutral SDF affordances to protocol-specific operations.

Registration is performed via POST /registrations/models with the SDF model in the request body. A registered model can be retrieved via GET /registrations/models using the model identifier (sdfName).

2.6.2. NIPC Operations

NIPC operations require two parameters:

1. Device ID: the UUID identifying the target device (or group).
2. sdfName: the SDF global name (absolute URI with fragment) of the affordance (property, action, or event) on which the operation acts.

2.6.2.1. Device ID

All NIPC operations are executed against a device or a group of devices. Devices or groups of devices are identified by a unique UUID, adhering to [RFC9562].

Attribute	Type	Example
id	uuid	1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30

Table 1: Definition of a device or group of devices

ID is a UUID assigned to uniquely identify a device to the NIPC Gateway (e.g., by a SCIM server) and the application calling the APIs. The NIPC Gateway must have access to a device object identified by this device ID and the application must store this UUID in order to use it to identify the device on which it wants to perform NIPC operations.

2.6.2.2. SDF Name

Operations act on SDF affordances and reference them by SDF global name—an absolute URI with fragment that includes the namespace. The affordance referenced MAY be a property, action, or event; the reference is carried as a string.

For example:

NIPC Operation	Example SDF Name used in the API
Property	https://example.com/heartrate#/sdfObject/thermostat/sdfProperty/temperature
Event	https://example.com/heartrate#/sdfObject/healthsensor/sdfEvent/fallDetected
Action	https://example.com/heartrate#/sdfObject/thermostat/sdfAction/resetThermostat

Table 2: Example SDF names for NIPC operations

2.6.3. Parameters

To minimize deployment risk arising from inconsistent URI path normalization and handling of percent-encoded reserved characters in path elements (notably “/” encoded as “%2F”) across common HTTP servers and intermediaries (e.g., Jetty, Tomcat, Apache httpd, NGINX), NIPC uses query parameters (except the primary {id} path segment) rather than additional path segments for values that can legitimately contain reserved characters (such as SDF global names).

Although [RFC3986] and [RFC9110] require that reserved characters not be normalized or decoded in ways that alter semantics, misinterpretation of these rules has led to security vulnerabilities (path confusion, cache poisoning, authorization bypass) and to conservative default configurations that reject encoded slashes. In proxy deployments, relaxing these defaults often triggers security review friction. Representing such values in the query component avoids reliance on tolerant path normalization behavior, reduces ambiguity for intermediaries, and aligns with prevailing “safe” operational profiles; a malformed or unsupported parameter can be rejected with a 4xx status without exposing downstream services to traversal or normalization discrepancies.

2.6.4. Responses

A NIPC Gateway must respond to a NIPC operation request synchronously, and provide the result of the completed operation in the HTTP response.

Exceptions to this are the following:

1. Extensions: Extension APIs (see Section 5.2) execute compound operations and thus require the gateway to execute multiple NIPC operations. On acceptance, the gateway returns 202 Accepted. Clients poll the extension URI (GET) for execution status. If a callback URI was supplied in the request, the gateway MAY send the final result upon completion.
2. Actions: Action requests return 202 Accepted with a Location header pointing to the action instance used for status tracking.

A failure response must contain an HTTP status code of 4xx or 5xx, and use [RFC9457] Problem Details with application/problem+json media type.

All NIPC failure responses must include the following attributes:

- * type: a URI identifying the error (see Section 6)
- * status: the 4xx or 5xx HTTP status code
- * title: a brief, human-readable summary
- * detail: a human-readable explanation specific to this occurrence
Additional attributes MAY be included as permitted by [RFC9457].

```
<CODE BEGINS> file "failure_response.cddl"
===== NOTE: '\n' line wrapping per RFC 8792 =====

FailureResponse = {
  ? type: FailureTypeURI,
  ? status: uint,
  ? title: text,
  ? detail: text
}

; Enumerated problem type URIs registered for NIPC
FailureTypeURI = (
  "https://www.iana.org/assignments/nipc-problem-types#invalid-id" /
  "https://www.iana.org/assignments/nipc-problem-types#invalid-sdf-u\
rl" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-ope\
ration-not-executed" /
  "https://www.iana.org/assignments/nipc-problem-types#sdf-model-alr\
eady-registered" /
  "https://www.iana.org/assignments/nipc-problem-types#sdf-model-in-\
use" /
  "https://www.iana.org/assignments/nipc-problem-types#property-not-\
readable" /
  "https://www.iana.org/assignments/nipc-problem-types#property-read\
-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#property-not-\
writable" /
  "https://www.iana.org/assignments/nipc-problem-types#property-writ\
e-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#event-already\
-enabled" /
  "https://www.iana.org/assignments/nipc-problem-types#event-not-ena\
bled" /
  "https://www.iana.org/assignments/nipc-problem-types#event-not-reg\
istered" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-already-connected" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-no-connection" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-connection-timeout" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-bonding-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-connection-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-service-discovery-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
```

```

le-invalid-service-or-characteristic" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-z\
igbee-connection-timeout" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-z\
igbee-invalid-endpoint-or-cluster" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-bro\
adcast-invalid-data" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-fir\
mware-rollback" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-fir\
mware-update-failed" /
  "about:blank"
)
<CODE ENDS>

```

Example of a failure response:

```

<CODE BEGINS>
===== NOTE: '\\\ ' line wrapping per RFC 8792 =====
{
  "type": "https://www.iana.org/assignments/nipc-problem-types#inval\
\id-id",
  "status": 400,
  "title": "Invalid Device ID",
  "detail": "Device ID 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30 does not\
\ exist or is not a device"
}
<CODE ENDS>

```

Figure 5: Example failure response

3. NIPC Registration APIs

3.1. SDF model registrations APIs

SDF model registration APIs allow applications to register an SDF model for a class of devices. These APIs use the application/sdf+json media type, as described in Section 7.1 of [I-D.ietf-asdf-sdf].

3.1.1. Register an SDF model

Method: POST /registrations/models

Description: Registers one or more SDF models for a class of devices.

Request Body:

- * The SDF document in JSON format containing one or more sdfThings or sdfObjects, similar to the example in Appendix F.
- * The SDF document MUST contain protocol mappings, as described in [I-D.ietf-asdf-sdf-protocol-mapping].

Response:

A list containing objects where each object has an "sdfName" which is the global name of the top-level sdfThing or sdfObject in the SDF model.

```
<CODE BEGINS> file "sdf_reference.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

SdfGlobalName = text      ; absolute URI with fragment referencing an \
sdfThing or sdfObject

SdfReference = {
  sdfName: SdfGlobalName
}

SdfReferenceArray = [* SdfReference]
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
[
  {
    "sdfName": "https://example.com/hearttrate#/sdfObject/healthsensor"
  }
]
<CODE ENDS>
```

Figure 6: Example of a response to an SDF model registration

3.1.2. Get all SDF models

Method: GET /registrations/models

Description: Gets all SDF models registered with the gateway.

Response:

A list containing objects where each object has an "sdfName" which is the global name of the top-level sdfThing or sdfObject in the SDF model.

```
<CODE BEGINS> file "sdf_reference.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

SdfGlobalName = text      ; absolute URI with fragment referencing an \
sdfThing or sdfObject

SdfReference = {
  sdfName: SdfGlobalName
}

SdfReferenceArray = [* SdfReference]
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
[
  {
    "sdfName": "https://example.com/heartrate#/sdfObject/healthsensor"
  },
  {
    "sdfName": "https://example.com/thermometer#/sdfObject/thermometer"
  }
]
<CODE ENDS>
```

Figure 7: Example of a response to get all SDF models

3.1.3. Get an SDF model

Method: GET /registrations/models{?sdfName}

Description: Gets an SDF model registered with the gateway.

Query Parameters:

- * sdfName: the name of the top-level sdfThing or sdfObject in the SDF model.

Response:

- * The SDF model is returned in JSON format, similar to the example in Appendix F.

3.1.4. Delete an SDF model

Method: DELETE /registrations/models{?sdfName}

Description: Deletes an SDF model registered with the gateway.

Query Parameters:

- * sdfName: the name of the top-level sdfThing or sdfObject in the SDF model.

Response:

- * A list containing objects where each object has an "sdfName" which is the global name of the top-level sdfThing or sdfObject in the SDF model

```
<CODE BEGINS> file "sdf_reference.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====
```

```
SdfGlobalName = text      ; absolute URI with fragment referencing an \
sdfThing or sdfObject
```

```
SdfReference = {
  sdfName: SdfGlobalName
}
```

```
SdfReferenceArray = [* SdfReference]
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
{
  "sdfName": "https://example.com/hearttrate#/sdfObject/healthsensor"
}
<CODE ENDS>
```

Figure 8: Example of a response to an SDF model registration

3.1.5. Update an SDF model

Method: PUT /registrations/models{?sdfName}

Description: Updates an SDF model registered with the gateway.

Query Parameters:

- * sdfName: the name of the top-level sdfThing or sdfObject in the SDF model.

Request Body:

- * An SDF model in JSON format, similar to the example in Appendix F.

Response:

- * A list containing objects where each object has an "sdfName" which is the global name of the top-level sdfThing or sdfObject in the SDF model

```
<CODE BEGINS> file "sdf_reference.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

SdfGlobalName = text      ; absolute URI with fragment referencing an \
sdfThing or sdfObject

SdfReference = {
  sdfName: SdfGlobalName
}

SdfReferenceArray = [* SdfReference]
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
{
  "sdfName": "https://example.com/hearttrate#/sdfObject/healthsensor"
}
<CODE ENDS>
```

Figure 9: Example of a response to an SDF model registration

3.2. Data application registrations APIs

Data-app registration APIs allow applications to register a data application that will receive streaming data from the gateway. These APIs operate on a data app ID. This ID corresponds to the endpoint app ID of the telemetry endpoint app that is registered with the SCIM server as an authorized endpoint that can receive data for a device. The endpoint app is defined in Section 6 of [I-D.ietf-scim-device-model].

Apart from the endpoint app ID, the API also configures the protocol the data-app supports. These should be one of the following:

- * mqttClient: The data-app is an MQTT client, which means that the NIPC gateway must act as an MQTT broker.

- * `mqttBroker`: The data-app is an MQTT broker, which means that the NIPC gateway must act as an MQTT client. The MQTT broker configuration data, such as the URI, credentials and MQTT topic must also be provided in the registration API.
- * `webhook`: The data-app supports a webhook the gateway can publish to. The registration API has to include the webhook URI & credentials.
- * `websocket`: The data-app supports a websocket interface. The registration API has to include the websocket URI & credentials.

3.2.1. Register a data application

Method: POST `/registrations/data-apps{?dataAppId}`

Description: Registers a data application with the gateway.

Query Parameters:

- * `dataAppId`: the ID of the data application

Request Body:

- * `events`: a list of events that the data application is authorized for.
- * `mqttClient`: a boolean that denotes that the data application is an MQTT client.
- * `mqttBroker`: The data app is an MQTT broker. This object contains the MQTT broker information:
 - `URI`: the URI of the MQTT broker.
 - `username`: the username to authenticate with the MQTT broker.
 - `password`: the password to authenticate with the MQTT broker.
 - `brokerCACert`: the base64-encoded CA certificate of the MQTT broker (optional).
 - `customTopic`: By default, the topic will be composed of `data-app/<dataAppId>/<namespace>/<json_pointer_to_sdf_event>`, as described in Section 4.2. In this attribute, a custom topic can be configured (optional).

- * webhook: The data app supports a webhook. This object contains a webhook URL along with any credentials that are required to authenticate the webhook.
 - URI: the webhook URI. The URI MUST include the scheme used by the webhook server (e.g., "https://"). It is up to the implementation to support different schemes. If a scheme is not supported, the NIPC gateway MUST return an error response with type "https://www.iana.org/assignments/nipc-problem-types#unsupported-uri-scheme".
 - headers: An object that contains the headers to be sent with the webhook request. The headers can contain any authentication information required by the webhook server. Each header is represented as a key-value pair in the object.
 - serverCACert: the CA certificate of the webhook server, encoded as per [RFC7468] and newlines encoded as '\n' (optional)
- * websocket: The data app supports a websocket. This object contains a websocket URL along with any credentials that are required to authenticate the websocket. The websocket URL is the endpoint where the streaming data will be sent.
 - URI: the websocket URI. The URI MUST include the scheme used by the websocket server (e.g., "wss://"). It is up to the implementation to support different schemes. If a scheme is not supported, the NIPC gateway MUST return an error response with type "https://www.iana.org/assignments/nipc-problem-types#unsupported-uri-scheme".
 - headers: An object that contains the headers to be sent with the websocket request. The headers can contain any authentication information required by the websocket server. Each header is represented as a key-value pair in the object.
 - serverCACert: the CA certificate of the websocket server, encoded as per [RFC7468] and newlines encoded as '\n' (optional)

```
<CODE BEGINS> file "data_app.cddl"
DataApp = {
  events: [* EventRef],
  ( DataAppMqttClient //
    DataAppMqttBroker //
    DataAppWebhook //
    DataAppWebsocket )
}

EventRef = {
  event: text      ; SDF global name (absolute URI with fragment)
}

DataAppMqttClient = {
  mqttClient: bool
}

DataAppMqttBroker = {
  mqttBroker: {
    URI: text,
    username: text,
    password: text,
    ? brokerCACert: text,    ; PEM-encoded CA certificate
    ? customTopic: text     ; optional custom MQTT topic
  }
}

DataAppWebhook = {
  webhook: {
    URI: text,
    ? headers: { * text => text }, ; key/value headers
    ? serverCACert: text
  }
}

DataAppWebsocket = {
  websocket: {
    URI: text,
    ? headers: { * text => text }, ; key/value headers
    ? serverCACert: text
  }
}
<CODE ENDS>
```

Example of a request body:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

{
  "events": [
    {
      "event": "https://example.com/heartrate#/sdfObject/healthsenso\
r/sdfEvent/fallDetected"
    }
  ],
  "mqttClient": true
}
<CODE ENDS>
```

Figure 10: Example with mqttClient

Example of a request body for a data application that is an MQTT broker:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

{
  "events": [
    {
      "event": "https://example.com/heartrate#/sdfObject/healthsenso\
r/sdfEvent/fallDetected"
    }
  ],
  "mqttBroker": {
    "URI": "mqtt.example.com:1883",
    "username": "user",
    "password": "password",
    "customTopic": "custom/topic"
  }
}
<CODE ENDS>
```

Figure 11: Example with mqttBroker

Response:

- * If successful, the response will be identical to the request body.

3.2.2. Update a data application

Method: PUT /registrations/data-apps{?dataAppId}

Description: Updates a data application registration.

Query Parameters:

- * dataAppId: the ID of the data application

Request Body:

- * The request body is identical to the request body for the register data application API Section 3.2.1.

Response:

- * If successful, the response will be identical to the request body.

3.2.3. Get a data application

Method: GET /registrations/data-apps{?dataAppId}

Description: Gets a data application object registered with the gateway.

Query Parameters:

- * dataAppId: the ID of the data application

Response:

The response will be identical to the request body for the register data application API Section 3.2.1.

3.2.4. Delete a data application

Method: DELETE /registrations/data-apps{?dataAppId}

Description: Deletes a data application registered with the gateway.

Query Parameters:

- * dataAppId: the ID of the data application

Response:

- * If successful, the response will be identical to the request body for the register data application API Section 3.2.1.

4. NIPC Operation APIs

The NIPC operation APIs perform protocol-neutral interactions on SDF affordances, properties, events, and actions. This allows applications to read & update device properties, invoke actions, and consume events.

NIPC defines three API collections aligned with the SDF Affordances defined in Section 1.2 of [I-D.ietf-asdf-sdf]:

- * Properties: read and write device properties.
- * Events: enable and disable device event reporting.
- * Actions: invoke device actions.

To invoke NIPC operations APIs on a device, one or more SDF models MUST be registered for that device. The SDF model MAY have a top-level sdfThing (with multiple sdfObjects) or a top-level sdfObject. Operations depend on affordances (sdfProperty, sdfEvent, sdfAction) defined in the registered SDF model and on a device ID (see [I-D.ietf-scim-device-model]). Affordances are referenced by their SDF global name (absolute URI with fragment) as described in Section 4 of [I-D.ietf-asdf-sdf].

The NIPC Gateway must match the SDF global name against the registered SDF model to resolve the protocol mapping (protocolmap) the gateway will execute. When carried in a URI, the SDF global name MUST be percent-encoded per Section 2.1 of [RFC3986].

4.1. NIPC Property APIs

These APIs allow applications to read and update device properties. If the underlying protocol requires a connection, the gateway establishes it implicitly for the operation; when an explicit connection is already active, operations reuse it without modification.

Requests and responses support content negotiation via Content-Type and Accept. When using "application/nipc+json", payloads must follow the examples above. Binary property values must be base64-encoded with padding per Section 5 of [RFC4648] in the "value" field. For other media types, payload semantics must follow the selected media type.

4.1.1.1. Update one or multiple values

Method: PUT /devices/{id}/properties{?propertyName}

Description: Write values to one or more properties on a device

Parameters:

- * id: the ID of the device

Query Parameters:

- * propertyName: Identifies a single property to update. If present, the request body MAY use any media type appropriate to the property payload. -or-
- * If absent, the request body MUST be application/nipc+json and contain an array of update items, each with a property and a value.

Request Body:

- * If the query parameter propertyName is provided, the request body MAY use any media type appropriate to the property payload. The value is encoded as per the content type of the payload. -or-
- * If the query parameter propertyName is NOT provided, the request body must be an array of properties to update, each containing a property and a value. The value attribute contains the raw binary data, which must be encoded in base64 with padding as per Section 5 of [RFC4648].

```
<CODE BEGINS> file "property_value_array.cddl"
```

```
PropertyValueArray = [* PropertyValue]
```

```
; Minimal PropertyValue shape (matches allOf of Property + Value)
```

```
PropertyValue = {  
  property: text,           ; SDF global name of the property  
  value: b64text           ; base64-encoded bytes (RFC 4648 Section 5)  
}
```

```
; Helper type for base64-with-padding encoded text
```

```
b64text = text
```

```
<CODE ENDS>
```

Example body for updating multiple properties:


```

<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "property": "https://example.com/heartrate#/sdfObject/thermostat\
/sdfProperty/temperature",
    "value": "dGVzdA=="
  },
  {
    "property": "https://example.com/heartrate#/sdfObject/thermostat\
/sdfProperty/humidity",
    "value": "eGVzdB=="
  }
]
<CODE ENDS>

```

Figure 12: Example updating multiple properties

Response:

- * If the Accept header is set to application/nipc+json, the response must be an array with a status field set to 200 for each property that was updated, or a problem type object for each property that failed to update. The "properties" array must be an array of properties that were updated, each containing a property and a value. -or-
- * If the Accept header is set to any other media type and the propertyName query parameter is provided, the response must be 204 No Content with no body.

```

<CODE BEGINS> file "property_value_response_array.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

PropertyValueResponseArray = [* PropertyValueResponseArrayItem]

PropertyValueResponseArrayItem = ( SuccessResponse // FailureRespon\
s\
e )

; Minimal success shape (may be extended)
SuccessResponse = {
  ? status: uint
}
<CODE ENDS>

```

Example of a response:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "status": 200
  },
  {
    "type": "https://www.iana.org/assignments/nipc-problem-types#inv\
alid-property",
    "status": 400,
    "title": "Invalid Property",
    "detail": "Property https://example.com/heartrate#/sdfObject/the\
rmostat/sdfProperty/temperature does not exist or is not writable"
  }
]
<CODE ENDS>
```

Figure 13: Example update multiple properties response

4.1.2. Read one or multiple values

Method: GET /devices/{id}/properties{?propertyName*}

Description: Read values from one or more properties on a device

Parameters:

* id: the ID of the device

Query Parameters:

* propertyName: The property to read. This can be a single property or multiple properties. If multiple properties are provided, the request body MUST contain an application/nipc+json payload with an array of properties to read.

Response:

* If the Accept header is set to application/nipc+json, the response must be an array of properties, each containing a property and a value. The value must be the raw binary data read from the property, encoded in base64 with padding as per Section 5 of [RFC4648]. The array must contain objects with 2 attributes: - property: The property that was read. - value: The bytes that were read in base64 encoding -or-

- * If the Accept header is set to any other media type and a single propertyName query parameter is provided, the request body MAY use any media type appropriate to the property payload. The value is encoded as per the content type of the payload.

```
<CODE BEGINS> file "property_value_read_response_array.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

PropertyValueReadResponseArray = [* PropertyValueReadResponseArrayItem\
em]

PropertyValueReadResponseArrayItem = ( PropertyValue // FailureRespo\
nse )
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "property": "https://example.com/heartrate#/sdfObject/thermostat\
/sdfProperty/temperature",
    "value": "dGVzdA=="
  },
  {
    "property": "https://example.com/heartrate#/sdfObject/thermostat\
/sdfProperty/humidity",
    "value": "eGVzdB=="
  }
]
<CODE ENDS>
```

Figure 14: Example read multiple properties response

4.2. NIPC Event APIs

Event APIs enable or disable reporting of device events. For certain protocols, a connection may be required. If the underlying protocol requires a connection, the gateway establishes it implicitly for the operation. If an explicitly created connection is already active, it is reused without modification.

Events are referenced by the SDF global name of an sdfEvent. The {id} path segment identifies a device or a group of devices. A group event MAY be enabled only if the underlying protocol supports group activation (e.g., BLE advertisement or connection status events).

If the data application registered for this event is an MQTT broker or client, the event SDF global name may be used to construct the MQTT topic for the event. The topic is constructed using the data application ID, the default namespace for the event, and the event itself. For example, if the data application ID is "0927ce7c-b258-4bfa-a345-bcc9f74385b4" and the event is "https://example.com/thermometer#/sdfThing/thermometer/sdfEvent/isPresent", the topic will be:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

data-app/<dataAppId>/<namespace>/<json_pointer_to_sdf_event>

data-app/0927ce7c-b258-4bfa-a345-bcc9f74385b4/thermometer/sdfThing/\
thermometer/sdfEvent/isPresent

A data application may subscribe to this topic using the topic or it may use MQTT wildcards to subscribe to data-app/+ /temperature/# to receive all events for the temperature namespace.

If a customTopic was supplied in the data-app registration (mqttBroker case), that topic MUST be used instead of the constructed default.

4.2.1. Enable event reporting

Method: POST /devices/{id}/events{?eventName}

Description: Enables an event on a device

Parameters:

* id: the ID of the device

Query Parameters:

* eventName: the event to enable. The eventName must be a URL encoded string that is the absolute URI that is the global name of an sdfEvent.

Response:

* Returns HTTP status code 201 Created with a Location header pointing to the created event instance.

Example of a successful response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

HTTP/1.1 201 Created
Location: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/events?instanceId=02ee282c-8915-4b2e-bbd2-88966773134a

The Location header must contain the URI for the created event instance, which may be used to check status or disable the event.

4.2.2. Disable event reporting

Method: DELETE /devices/{id}/events{?instanceId}

Description: Disables an event on a device

Parameters:

- * id: the ID of the device or group of devices

Query Parameters:

- * instanceId: the instance ID of the event to disable (obtained from the Location header when the event was enabled)

Response:

- * Returns HTTP status code 204 No Content on successful disable.

HTTP/1.1 204 No Content

4.2.3. Get status of one or more events

Method: GET /devices/{id}/events{?instanceId*}

Description: Get the status of one or more events on a specific device

Parameters:

- * id: the ID of the device or group of devices

Query Parameters:

- * instanceId: a comma separated list of event instance IDs to filter by (optional)

Response: The response must be an array of events, each containing an instanceID and an event. - instanceId: must be the unique instance ID for each enabled event. - event: must be the event URI for each enabled event.

```
<CODE BEGINS> file "event_status_array.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====
```

```
EventStatusResponseArray = [* EventStatusResponseArrayItem]
```

```
EventStatusResponseArrayItem = ( EventInstanceSuccess // FailureResponse )
```

```
; Success item = { event, instanceId }
EventInstanceSuccess = {
  event: text,           ; SDF global name of the event (absolute URI w\
ith fragment)
  instanceId: text       ; UUID (as text)
}
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====
```

```
[
  {
    "instanceId": "02ee282c-8915-4b2e-bbd2-88966773134a",
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected"
  }
]
<CODE ENDS>
```

Figure 15: Example get multiple events status response

4.2.4. Enable event reporting on a group of devices

Method: POST /groups/{id}/events

Description: Enables an event on a group of devices

Parameters:

* id: the ID of the group of devices

Query Parameters:

- * `eventName`: the event to enable. The `eventName` is a URL encoded string that is the absolute URI that is the global name of an `sdfEvent`.

Response:

- * The response must return HTTP status code 201 Created with a Location header pointing to the created event instance. The Location header must contain the URI for the created event instance, which can be used to check status or disable the event.

Example of a successful response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
HTTP/1.1 201 Created
Location: /groups/0dc729d7-f6c3-491d-9b9d-e7176d2be243/events?instanceId=f1b9f26b-21ce-4deb-9d57-289ba7e17cce
```

4.2.5. Disable event reporting on a group of devices

Method: DELETE /groups/{id}/events{?instanceId}

Description: Disables an event on a group of devices

Parameters:

- * `id`: the ID of the group of devices

Query Parameters:

- * `instanceId`: the instance ID of the event to disable (obtained from the Location header when the event was enabled)

Response:

MUST return 200 OK with an array of per-device event status entries. For each device where the event was successfully disabled, the entry MUST include `deviceId` and `event` (SDF global name). For each device where disabling failed, the entry MUST be a Problem Details error object for that device.

```
<CODE BEGINS> file "group_event_status_response_array.cddl"
===== NOTE: '\\' line wrapping per RFC 8792 =====

GroupEventStatusResponseArray = [* GroupEventStatusResponse]

GroupEventSuccessResponse = { event: text, deviceId: text }

; Each item is either an event+deviceId success or a FailureResponse
GroupEventStatusResponse = (GroupEventSuccessResponse // FailureResp\
onse)

; FailureResponse (Problem Details subset; align with your existing \
definition if present)
GroupFailureResponse = {
  FailureResponse,
  ? deviceId: text
}
<CODE ENDS>
```

Example of a response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
[
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "d62c7fb2-a216-4811-a388-053b17fdbedc"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "01b52a23-b98c-454c-ba9e-086a43bdfd79"
  },
  {
    "type": "https://www.iana.org/assignments/nipc-problem-types#eve\
nt-not-enabled",
    "status": 400,
    "title": "Event Not Enabled",
    "deviceId": "9171ec16-e3c1-4ccf-ad23-b92a1a3f069d",
    "detail": "Failed to disable the event for device 9171ec16-e3c1-\
4ccf-ad23-b92a1a3f069d"
  }
]
```

4.2.6. Get event status on a group of devices

Method: GET /groups/{id}/events{?instanceId}

Description: Get the status of one or more events for a group of devices

Parameters:

* id: the ID of the group of devices

Query Parameters:

* instanceId: the instance ID of the event to disable (obtained from the Location header when the event was enabled).

Response:

MUST return 200 OK with an array of per-device event status entries. For each device where the event was successfully enabled, the entry MUST include deviceId and event (SDF global name). For each device where enabling failed, the entry MUST be a Problem Details error object for that device.

```
<CODE BEGINS> file "group_event_status_response_array.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====
```

```
GroupEventStatusResponseArray = [* GroupEventStatusResponse]

GroupEventSuccessResponse = { event: text, deviceId: text }

; Each item is either an event+deviceId success or a FailureResponse
GroupEventStatusResponse = (GroupEventSuccessResponse // FailureResp\
onse)

; FailureResponse (Problem Details subset; align with your existing \
definition if present)
GroupFailureResponse = {
  FailureResponse,
  ? deviceId: text
}
<CODE ENDS>
```

Example of a response:

```

<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "d62c7fb2-a216-4811-a388-053b17fdbedc"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsensor/\
sdfEvent/fallDetected",
    "deviceId": "01b52a23-b98c-454c-ba9e-086a43bdfd79"
  },
  {
    "type": "https://www.iana.org/assignments/nipc-problem-types#eve\
nt-not-enabled",
    "status": 400,
    "title": "Event Not Enabled",
    "deviceId": "9171ec16-e3c1-4ccf-ad23-b92a1a3f069d",
    "detail": "Failed to disable the event for device 9171ec16-e3c1-\
4ccf-ad23-b92a1a3f069d"
  }
]
<CODE ENDS>

```

Figure 16: Example get multiple group events status response

4.3. NIPC Action APIs

NIPC Action APIs invoke device actions. If the underlying protocol requires a connection, the gateway establishes it implicitly for the operation. If an explicitly established connection is already active, the operation MUST reuse it without modification.

4.3.1. Perform an action

Method: POST /devices/{id}/actions{?actionName}

Description: Perform an action on a specific device

Parameters:

- * id: the ID of the device

Query Parameters:

- * actionName: the action to perform

Request Body:

The request body is optional and may contain a value. The media type of the value can be defined by the underlying protocol, for example it could be octet-stream for binary data.

Response:

Actions are performed asynchronously. A successful request returns HTTP status code 202 Accepted with a Location header pointing to the action instance for status checking. The Location header contains the URI for the action instance, which can be used to check the action status.

Example of a successful response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

HTTP/1.1 202 Accepted
Location: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/actions?instanceId=02ee282c-8915-4b2e-bbd2-88966773134a

4.3.2. Check action status

Method: GET /devices/{id}/actions{?instanceId}

Description: Check the status of an action on a specific device

Parameters:

- * id: the ID of the device

Query Parameters:

- * instanceId: the instance ID of the action (obtained from the Location header)

Response: MUST return 200 OK with an action status, which may be "in progress" or "completed".

```
<CODE BEGINS> file "action_response.cddl"
ActionResponse = {
  status: ActionStatus
}

ActionStatus = (
  "IN_PROGRESS" /
  "COMPLETED"
)
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
{
  "status": "COMPLETED"
}
<CODE ENDS>
```

Figure 17: Example action status response

4.4. NIPC trigger APIs

Triggers APIs do not actually execute an operation on a device or group of devices, but install a trigger that registers an operation. When triggered the registered operation gets executed.

Triggers can be installed for devices or groups of devices, represented by their id as a path parameter.

The trigger can be an action or an event. the global name of the trigger is passed as a path parameter.

The operation is always an action. Since an action can be executed against both a device and a group, the trigger API also supports actions on both devices and groups of devices. The action is defined by its full NIPC URI to be executed, for example:
"/devices/3171ec43-42a5-4415-ab4b-afd0dfbe9615/actions?actionName=https://example.com/AlarmSystem#/sdfObject/bell/sdfAction/ring"

If a NIPC Gateway supports multiple protocols, then a trigger can be defined on a devices that supports one protocol and triggers an action on a device that supports a different protocol. As an example, an event on a BLE device can trigger an action on a Zigbee device.

4.4.1. Create a trigger on a device

Method: POST /devices/{id}/triggers{?sdfName}

Description: Creates a trigger on an affordance of a device. A trigger will trigger an action on another device or a group of devices.

Parameters:

- * id: the ID of the device

Query Parameters:

- * sdfName: the sdfName of the affordance that is associated with the trigger. This can be either an event or an action. the event to enable. The sdfName must be a URL encoded string that is the absolute URI that is the global name of an sdfEvent or an sdfAction.

Request Body:

- * The request body must be of type 'application/nipc+json', and contain an action object. The action object contains a NIPC URI to be executed, including the device or group id and actionname percent-encoded query parameter.

```
<CODE BEGINS> file "action.cddl"
Action = {
  ? action: text ; NIPC action operation to execute
}
<CODE ENDS>
```

Example body for trigger creation:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

{
  "action": "/devices/3171ec43-42a5-4415-ab4b-afd0dfbe9615/actions?a\
ctionName=https%3A%2F%2Fexample.com%2FAlarmSystem%23%2FsdfObject%2Fb\
ell%2FsdfAction%2Fring"
}
<CODE ENDS>
```

Figure 18: Example trigger creation

Response:

- * Returns HTTP status code 201 Created with a Location header pointing to the created trigger instance.

Example of a successful response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

HTTP/1.1 201 Created
Location: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/trigger?instanceId=02ee282c-8915-4b2e-bbd2-88966773134a

The Location header must contain the URI for the created trigger instance, which may be used to check status or disable the event.

4.4.2. Delete a trigger on a device

Method: DELETE /devices/{id}/triggers{?instanceId}

Description: Deletes an installed trigger

Parameters:

- * id: the ID of the device

Query Parameters:

- * instanceId: the instance ID of the trigger to disable (obtained from the Location header when the trigger was installed)

Response:

- * Returns HTTP status code 204 No Content on successful delete.

HTTP/1.1 204 No Content

4.4.3. Get installed triggers for a device

Method: GET /devices/{id}/triggers{?instanceId}

Description: Get the installed triggers for a devices, or a specific trigger when specifying an instanceId.

Parameters:

- * id: the ID of the device

Query Parameters:

- * `instanceId`: an InstanceID, or comma separated list of event instance IDs to filter by (optional)
- * If no query parameter is supplied, then all triggers for the device must be retrieved

Response:

The response must be an array of triggers, each containing an `instanceId`, the `sdfName` of an affordance and an action. - `instanceId`: must be the instance ID for each installed trigger, as returned by the NIPC GW when the trigger was created. - `sdfName`: must be the `sdfName` of the affordance (event or action) that is associated with the trigger. - `action`: must be the NIPC URI of the action to be executed when the trigger is activated.

```
<CODE BEGINS> file "trigger_status_array.cddl"
; Trigger status response array and item shape
```

```
TriggerStatusResponseArray = [* TriggerResponse]
```

```
TriggerResponse = {
  SdfReference,
  ? action: text,      ; NIPC action operation to execute
  instanceId: text     ; UUID (as text)
}
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "instanceId": "02ee282c-8915-4b2e-bbd2-88966773134a",
    "sdfName": "https://example.com/heartrate#/sdfObject/healthsenso\
r",
    "action": "/devices/3171ec43-42a5-4415-ab4b-afd0dfbe9615/actions\
?actionName=https%3A%2F%2Fexample.com%2FAlarmSystem%23%2FsdfObject%2\
Fbell%2FsdfAction%2Fring"
  }
]
<CODE ENDS>
```

Figure 19: Example get multiple triggers response

4.4.4. Create a trigger on a group of devices

Method: POST /groups/{id}/triggers{?sdfName}

Description: Creates a trigger on an affordance of a group of devices. A trigger will trigger an action on another device or a group of devices.

Parameters:

- * id: the ID of the group of devices

Query Parameters:

- * sdfName: the sdfName of the affordance that is associated with the trigger. This can be either an event or an action. the event to enable. The sdfName must be a URL encoded string that is the absolute URI that is the global name of an sdfEvent or an sdfAction.

Request Body:

- * The request body must be of type 'application/nipc+json', and contain an action object. The action object contains a NIPC URI to be executed, including the device or group id and actionname percent-encoded query parameter.

```
<CODE BEGINS> file "action.cddl"
Action = {
  ? action: text ; NIPC action operation to execute
}
<CODE ENDS>
```

Example body for trigger creation:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

{
  "action": "/groups/3171ec43-42a5-4415-ab4b-afd0dfbe9615/actions?ac\
tionName=https%3A%2F%2Fexample.com%2FAlarmSystem%23%2FsdfObject%2Fbe\
11%2FsdfAction%2Fring"
}
<CODE ENDS>
```

Figure 20: Example trigger creation

Response:

- * Returns HTTP status code 201 Created with a Location header pointing to the created trigger instance.

Example of a successful response:

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
HTTP/1.1 201 Created
Location: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/trigger?inst\
anceId=02ee282c-8915-4b2e-bbd2-88966773134a
```

The Location header must contain the URI for the created trigger instance, which may be used to check status or disable the event.

4.4.5. Delete a trigger on a group of devices

Method: DELETE /groups/{id}/triggers{?instanceId}

Description: Deletes an installed trigger

Parameters:

- * id: the ID of the group of devices

Query Parameters:

- * instanceId: the instance ID of the trigger to disable (obtained from the Location header when the trigger was installed)

Response:

- * Returns HTTP status code 204 No Content on successful delete.

```
HTTP/1.1 204 No Content
```

4.4.6. Get installed triggers for a group of devices

Method: GET /groups/{id}/triggers{?instanceId}

Description: Get the installed triggers for a group of devices, or a specific trigger when specifying an instanceId.

Parameters:

- * id: the ID of the group of devices
- Query Parameters:
 - * instanceId: an InstanceID, or comma separated list of event instance IDs to filter by (optional)

- * If no query parameter is supplied, then all triggers for the group of devices must be retrieved Response:

The response must be an array of triggers, each containing an instanceId, the sdfName of an affordance and an action. - instanceId: must be the instance ID for each installed trigger, as returned by the NIPC GW when the trigger was created. - sdfName: must be the sdfName of the affordance (event or action) that is associated with the trigger. - action: must be the NIPC URI of the action to be executed when the trigger is activated.

```
<CODE BEGINS> file "trigger_status_array.cddl"
; Trigger status response array and item shape
```

```
TriggerStatusResponseArray = [* TriggerResponse]
```

```
TriggerResponse = {
  SdfReference,
  ? action: text,      ; NIPC action operation to execute
  instanceId: text     ; UUID (as text)
}
<CODE ENDS>
```

Example of a response:

```
<CODE BEGINS>
===== NOTE: '\ ' line wrapping per RFC 8792 =====

[
  {
    "instanceId": "02ee282c-8915-4b2e-bbd2-88966773134a",
    "sdfName": "https://example.com/heartrate#/sdfObject/healthsenso\
r",
    "action": "/devices/3171ec43-42a5-4415-ab4b-afd0dfbe9615/actions\
?actionName=https%3A%2F%2Fexample.com%2FAlarmSystem%23%2FsdfObject%2\
Fbell%2FsdfAction%2Fring"
  }
]
<CODE ENDS>
```

Figure 21: Example get multiple group triggers response

4.5. NIPC explicit connection management APIs

Some protocols do not require explicit connection setup; for those protocols, the APIs in this section do not apply. For protocols that do require a connection (e.g., BLE), an NIPC gateway performs implicit connection management for individual operations (establish on demand; release on completion), so clients ordinarily need not manage connections. Clients MAY choose to explicitly establish and retain a connection to perform a sequence of operations that depends on intermediate results. This section specifies APIs for explicit connection lifecycle control. Examples use BLE.

4.5.1. Protocol Information Object

The protocol information object is used to define protocol specific parameters for connections. The protocol information object is protocol specific and defined in the protocol extensions. An example of where a protocol info object would be used is to return protocol specific connection parameters when making connections, for example a BLE service map. An example of a BLE protocol information object is shown below.

This specification defines both the BLE and the Zigbee protocol information objects for connections and broadcast messages.

```
<CODE BEGINS> file "protocolinfo.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

; CDDL translation of NIPC ProtocolInfo schemas (version 0.10.0)
; Source: nipc-openapi/protocolinfo/ProtocolInfo.yaml (+ BLE/Zigbee \
variants)

; Top-level wrappers
protocol-info-service-map = {
  protocolInformation: ble-service-map / zigbee-service-map,
  ...
}

protocol-info-broadcast = {
  protocolInformation: ble-broadcast / zigbee-broadcast,
  ...
}

; BLE protocol information
ble-service-map = {
  ble?: {
    services?: [* ble-service],
    cached?: bool,
```

```
        cacheExpiry?: int,
        autoUpdate?: bool,
        bonding?: bonding,
        ...
    },
    ...
}

bonding = "default" / "none" / "justworks" / "passkey" / "oob"

ble-service = {
    serviceID: uuid,
    characteristics?: [* ble-characteristic],
    ...
}

ble-characteristic = {
    characteristicID?: uuid,
    flags?: [* ble-flag],
    descriptors?: [* ble-descriptor],
    ...
}

ble-flag = "read" / "write" / "notify"

ble-descriptor = {
    descriptorID?: uuid,
    ...
}

ble-broadcast = {
    ble: {
        connectable?: bool,
        ...
    },
    ...
}

; Zigbee protocol information
zigbee-service-map = {
    zigbee: {
        endpoints?: [* zigbee-endpoint],
        ...
    },
    ...
}

zigbee-endpoint = {
```

```
    endpointID: int,
    clusters?: [* zigbee-cluster],
    ...
}

zigbee-cluster = {
    clusterID?: int,
    properties?: [* zigbee-property],
    ...
}

zigbee-property = {
    attributeID?: int,
    propertyType?: int,
    ...
}

zigbee-broadcast = {
    zigbee: {
        ...
    },
    ...
}

; Basic types
uuid = tstr .regexp "(?i)^[0-9a-f]{8}-[0-9a-f]{4}-[0-9a-f]{4}-[0-9a-f]{4}-[0-9a-f]{12}$"
<CODE ENDS>
```

4.5.2. Connect to a device

Method: POST /devices/{id}/connections

Description: Connect to a device

Parameters:

- * id: the ID of the device

Request Body:

- * Connection retry parameters
- * A protocol info object representing the BLE service map to be discovered. In the case of BLE, if no protocol info object is included, service discovery is performed to discover all supported properties when connecting to a device. Optionally, service discovery may be limited to properties defined in the "ble"

protocol extension. The services to be discovered can be added in an array. Property discovery can be buffered across connections, so the API also supports caching parameters.

Example body of a connection without specific discovery of properties:

```
<CODE BEGINS>
{
  "retries": 3
}
<CODE ENDS>
```

Figure 22: Example connection

where-

- * "retries" defines the number of retries in case the operation does not succeed

In case the application would like to discover specific properties of a device, an additional protocol information object can be provided that defines what properties should be discovered.

Example body of a BLE connection with specific discovery of properties:

```
<CODE BEGINS>
{
  "retries": 3,
  "protocolInformation": {
    "ble": {
      "services": [
        {
          "serviceID": "00001809-0000-1000-8000-00805f9b34fb"
        }
      ],
      "cached": false,
      "cacheExpiry": 3600,
      "autoUpdate": true,
      "bonding": "default"
    }
  }
}
<CODE ENDS>
```

Figure 23: Example connection with explicit discovery of connections

where in the BLE protocol object:

- * "services" is an array of services defined by their serviceIDs.
- * "cached" refers to whether the services need to be discovered for this connection. If cached is true, the services will be discovered for this connection only if it is not present in the cache. If cached is false, the services will be discovered for this connection. The services will be cached once it is discovered.
- * "cacheExpiry" defines how long (in seconds) the cache should be maintained before purging.
- * some devices support notifications on changes in services, "autoUpdate" allows the network to update services based on notification (on by default)
- * "bonding" allows you to override the bonding method configured in the device object. Possible values are default, none, justworks, passkey, oob. Default behavior is to use the bonding method defined in the device object.

Response:

Success responses includes an optional protocol information object with an array of discovered properties, as defined in the BLE protocol info object in section Section 4.5.1. This is an array of supported services, which in turn contains an array of characteristics, which in turn contains an array of descriptors, as shown in Figure 24.

```
services
- serviceID
  |
  |> characteristics
  |   - characteristicID
  |   - flags
  |   |
  |   |> Descriptors
  |   |   - descriptorID
```

Figure 24: BLE Services

Example of a response:


```

<CODE BEGINS>
{
  "id": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
  "protocolInformation": {
    "ble": {
      "services": [
        {
          "serviceID": "00001809-0000-1000-8000-00805f9b34fb",
          "characteristics": [
            {
              "characteristicID":
                "00002a1c-0000-1000-8000-00805f9b34fb",
              "flags": [
                "read",
                "write"
              ],
              "descriptors": [
                {
                  "descriptorID":
                    "00002902-0000-1000-8000-00805f9b34fb"
                }
              ]
            }
          ]
        }
      ]
    }
  }
}
<CODE ENDS>

```

Figure 25: Example connection response

where-

- * "id" is the ID of the device
- * "protocolInformation" contains an Array of BLE services as shown in Figure 24

A failure will generate a standard failed response. Please refer to Figure 5 definition of failed response.

4.5.3. Update a connection

Method: PUT /devices/{id}/connections

Description: Update a connection, for BLE this will update the cached ServiceMap for a device. Full service discovery will be performed, unless specific services are described in the API body.

Parameters:

- * id: the ID of the device

Request Body:

- * A protocol information object. In the case of BLE, if no protocol information is included, service discovery is performed to discover all supported properties when connecting to a device. Optionally, service discovery may be limited to properties defined in the "ble" protocol extension. The services to be discovered can be added in an array. Property discovery can be buffered across connections, so the API also supports caching parameters.

Example body of an update connection:

```
<CODE BEGINS>
{
  "protocolInformation": {
    "ble": {
      "services": [
        {
          "serviceID": "00001809-0000-1000-8000-00805f9b34fb"
        }
      ],
      "cached": false,
      "cacheExpiry": 3600,
      "autoUpdate": true
    }
  }
}
<CODE ENDS>
```

Figure 26: Example service discovery response

where in the BLE protocol object:

- * "services" is an array of services defined by their serviceIDs
- * "cached" refers to whether the services need to be cached for subsequent connects, in order not to perform service discovery on each request

- * "cacheExpiryDuration" defines how long the cache should be maintained before purging
- * some devices support notifications on changes in services, "autoUpdate" allows the network to update services based on notification (on by default)

Response:

Success responses include a protocol mapping with an array of discovered properties, as defined in the specific protocol. For example, for BLE, this is an array of supported services, which in turn contains an array of characteristics, which in turn contains an array of descriptors, as shown in Figure 24.

Example of a response:

```
<CODE BEGINS>
{
  "id": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
  "protocolInformation": {
    "ble": {
      "services": [
        {
          "serviceID": "00001809-0000-1000-8000-00805f9b34fb",
          "characteristics": [
            {
              "characteristicID":
                "00002a1c-0000-1000-8000-00805f9b34fb",
              "flags": [
                "read",
                "write"
              ],
              "descriptors": [
                {
                  "descriptorID":
                    "00002902-0000-1000-8000-00805f9b34fb"
                }
              ]
            }
          ]
        }
      ]
    }
  }
}
<CODE ENDS>
```

Figure 27: Example connection response

where-

- * "id" is the ID of the device
- * "protocolInformation" contains an Array of BLE services as shown in Figure 24 and described in Section 4.5.1.

A failure will generate a standard failed response. Please refer to Figure 5 definition of failed response.

4.5.4. Disconnect from a device

Method: DELETE /devices/{id}/connections

Description: Disconnect from a device

Parameters:

- * id: the ID of the device

Response:

Returns HTTP status code 200 OK with device ID on successful disconnect.

Example of a response:

```
<CODE BEGINS>
{
  "id": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
}
<CODE ENDS>
```

Figure 28: Example disconnect response

where "id" is the ID of the device.

A failure will generate a standard failed response. Please refer to Figure 5 definition of failed response.

4.5.5. Get connection status

Method: GET /devices/{id}/connections

Description: Get connection status for a device. Success when device(s) is/are connected, includes service map for the device if available. Failure when a device is not connected.

Parameters:

* id: the ID of the device

Response:

Example of a response:

```
<CODE BEGINS>
{
  "id": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
  "protocolInformation": {
    "ble": {
      "services": [
        {
          "serviceID": "00001809-0000-1000-8000-00805f9b34fb",
          "characteristics": [
            {
              "characteristicID":
                "00002a1c-0000-1000-8000-00805f9b34fb",
              "flags": [
                "read",
                "write"
              ],
              "descriptors": [
                {
                  "descriptorID":
                    "00002902-0000-1000-8000-00805f9b34fb"
                }
              ]
            }
          ]
        }
      ]
    }
  }
}
<CODE ENDS>
```

Figure 29: Example connection status response

where-

* "id" is the ID of the device

- * "protocolInformation" contains an Array of BLE services as shown in Figure 24

A failure will generate a standard failed response. Please refer to Figure 5 definition of failed response.

5. NIPC Extensibility

NIPC is designed to be extensible in two complementary ways:

- * Protocol mappings: NIPC relies on SDF protocol mappings to relate protocol-neutral affordances to protocol-specific operations. Adding a new mapping enables support for additional device protocols (or versions) without the need to change the NIPC API itself. This allows deployments to evolve as device ecosystems change, while preserving application portability and gateway interoperability. Protocol mapping is an extension to SDF and described in [I-D.ietf-asdf-sdf-protocol-mapping].
- * API extensions: Extensions compose multiple NIPC operations into a single request or introduce specialized flows optimized for common scenarios (e.g., bulk property updates, conditional reads, firmware operations). Extensions MUST use the "/extensions" path element and SHOULD focus on efficiency, latency reduction, and operational simplicity (fewer round trips, reduced state management). To ensure interoperability and consistent security review, extensions MUST be registered with IANA as defined in Section 11.2.

5.1. Protocol mappings

NIPC relies on SDF protocol mappings [I-D.ietf-asdf-sdf-protocol-mapping] to relate protocol-neutral affordances to protocol-specific operations. In [I-D.ietf-asdf-sdf-protocol-mapping] BLE and Zigbee are used as examples, however the mapping mechanism is extensible; so support for additional protocols (or versions) can be added without changing the NIPC schema or API.

5.2. API extensions

The extension APIs allow for extensibility of the APIs. Extension APIs may leverage the basic NIPC defined APIs and combine them in compound statements in order to streamline application operation against devices, make operations more expedient and convenient in one API call. An example of this is the bulk API extension. They may also introduce new functionality that is specific to a use case or protocol, such as the BLE transmit API.

Extensions must be defined under the /extensions path element. The extension name is defined as a path parameter after the /extensions path element. Extensions may define their own request and response payloads, as well as their own query parameters. Extensions must be IANA registered as defined in Section 11.2.

Extensions MAY implement long-running operations (e.g., firmware updates, bulk actions). For such operations, the server SHOULD respond with 202 Accepted and a Location header referencing a status URI. Clients MAY poll the status URI (GET) to obtain progress. While the operation is in progress, the status endpoint SHOULD return 200 OK with status information; upon completion, the server MAY redirect with 303 See Other to the final result resource, or return 200 OK with the completed result from the status endpoint. This pattern minimizes client state, supports retry, and provides a uniform mechanism for tracking asynchronous execution.

In the appendix Appendix D, we have defined a few example extensions.

6. NIPC Error Handling

Error types in NIPC APIs must use URI-based error type identifiers as defined in Section 11.4. The error types can be generic or specific to the API category. The error types are organized into the following categories:

- * Generic: Broadly applicable errors, including authorization, invalid identifiers, and generic failures.
- * Property APIs: Errors related to property APIs (read/write).
- * Event APIs: Errors related to event APIs (enable/disable).
- * Protocol specific: Errors related to protocol-specific operations.
- * Extension APIs: Errors related to extension APIs.

NIPC error types are defined in the table below:

Error Type	Description	Category
invalid-id	Invalid device ID or gateway doesn't recognize the ID	Generic
invalid-sdf-url	Invalid SDF URL or SDF affordance not found	Generic

extension-operation-not-executed	Operation was not executed since the previous operation failed	Generic
sdf-model-already-registered	SDF model already registered	Generic
sdf-model-in-use	SDF model in use	Generic
unsupported-uri-scheme	Unsupported URI scheme	Generic
property-not-readable	Property not readable	Property APIs
property-not-writable	Property not writable	Property APIs
event-already-enabled	Event already enabled	Event APIs
event-not-enabled	Event not enabled	Event APIs
event-not-registered	Event not registered for any data application	Event APIs
protocolmap-ble-already-connected	Device already connected	Protocol specific
protocolmap-ble-no-connection	No connection found for device	Protocol specific
protocolmap-ble-connection-timeout	BLE connection timeout	Protocol specific
protocolmap-ble-bonding-failed	BLE bonding failed	Protocol specific
protocolmap-ble-connection-failed	BLE connection failed	Protocol specific
protocolmap-ble-service-discovery-failed	BLE service discovery failed	Protocol specific
protocolmap-ble-invalid-service-or-	Invalid BLE service or characteristic ID	Protocol specific

characteristic		
protocolmap-zigbee-connection-timeout	Zigbee connection timeout	Protocol specific
protocolmap-zigbee-invalid-endpoint-or-cluster	Invalid Zigbee endpoint or cluster ID	Protocol specific
extension-transmit-invalid-data	Invalid transmit data	Transmit APIs
extension-firmware-rollback	Firmware rollback	Extension APIs
extension-firmware-update-failed	Firmware update failed	Extension APIs

Table 3: Error Codes

The appropriate HTTP status code is returned in the response.

7. Publish/Subscribe Interface

Events are delivered via a publish/subscribe interface. Event types include: (1) streaming data (enabled/disabled via the NIPC Events API), (2) broadcasts (e.g., advertisements), and (3) connection status (device link up/down). Event payloads are encoded in CBOR [RFC8949] and MAY be transported over MQTT, webhook, or websocket. CBOR is used because non-IP device payloads are typically binary; it encodes such data efficiently and is more compact than JSON, reducing bandwidth.

7.1. CDDL Definition

The event streaming format is defined here in CDDL [RFC8610]. A DataSubscription is a CBOR map containing the raw payload (bytes) and a timestamp (epoch seconds). It MAY include deviceID (the SCIM device identifier) when the payload is associated with a known device. Optional members (e.g., apMacAddress, rssi) MAY be present but can reveal deployment topology and SHOULD be omitted unless required. A choice group within DataSubscription indicates the event type (e.g., advertisement, subscription notification, connection status). An event publication MAY carry one or more DataSubscription entries in an array. Such an array is represented as DataBatch.

```
<CODE BEGINS> file "data_subscription.cddl"
start = DataBatch

DataBatch = [* DataSubscription]

DataSubscription = {
  ? data: bytes,
  timestamp: float, ; epoch in seconds
  ? deviceID: text,
  ? apMacAddress: text,
  subscription
}

subscription = (
  bleSubscription: BleSubscription //
  bleAdvertisement: BleAdvertisement //
  bleConnectionStatus: BleConnectionStatus //
  zigbeeSubscription: ZigbeeSubscription //
  rawPayload: RawPayload
)

BleSubscription = {
  serviceID: text,
  characteristicID: text
}

BleAdvertisement = {
  macAddress: text,
  ? rssi: nint,
}

BleConnectionStatus = {
  macAddress: text,
  connected: bool,
  ? reason: int
}

ZigbeeSubscription = {
  endpointID: int,
  clusterID: int,
  attributeID: int
  attributeType: int
}

RawPayload = {
  contextID: text
}
<CODE ENDS>
```

7.2. CBOR Examples

This section contains a few examples of the DataSubscription struct in CBOR diagnostic notation.

```
[
  {
    "data": h'02011A020A0C16FF4C001007721F41B0392078',
    "deviceID": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
    "timestamp": 1727484393,
    "bleAdvertisement": {
      "macAddress": "C1:5C:00:00:00:01",
      "rssi": -25
    }
  }
]
```

Figure 30: Onboarded BLE Device Advertisement

```
[
  {
    "data": h'02011A020A0C16FF4C001007721F41B0392078',
    "timestamp": 1727484393,
    "bleAdvertisement": {
      "macAddress": "C1:5C:00:00:00:01",
      "rssi": -25
    }
  }
]
```

Figure 31: Non-Onboarded BLE Device Advertisement

```
[
  {
    "data": h'434630374346303739453036',
    "deviceID": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
    "timestamp": 1727484393,
    "bleSubscription": {
      "serviceID": "a4e649f4-4be5-11e5-885d-feff819cdc9f",
      "characteristicID": "c4c1f6e2-4be5-11e5-885d-feff819cdc9f"
    }
  }
]
```

Figure 32: BLE GATT Notification

```
[
  {
    "deviceID": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
    "timestamp": 1727484393,
    "bleConnectionStatus": {
      "macAddress": "C1:5C:00:00:00:01",
      "connected": true
    }
  }
]
```

Figure 33: BLE Connection status event

```
[
  {
    "data": h'434630374346303739453036',
    "deviceID": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30",
    "timestamp": 1727484393,
    "zigbeeSubscription": {
      "endpointID": 1,
      "clusterID": 6,
      "attributeID": 12,
      "type": 1
    }
  }
]
```

Figure 34: Zigbee Attribute Notification

8. Examples

This section contains a few examples on how applications can leverage NIPC operations to communicate with BLE and Zigbee devices.

8.1. Property Read/Write

In this example, we will connect to a device and read and write from a property.

The sequence of operations for this are:

- * Declare a device instance using the SCIM Interface (out of scope of this memo)
- * Register an SDF model for the device

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /registrations/models
Content-Type: application/sdf+json
Accept: application/nipc+json
Host: localhost
```

```
{ ... }
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
[
  {
    "sdfName": "https://example.com/thermometer#/sdfThing/thermom\
eter"
  }
]
```

Request Body: JSON object with the SDF model, from Appendix F

- * Read a property from the BLE device

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
GET /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/properties?prop\
ertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2FsdfThing%2F\
thermometer%2FsdfProperty%2Fdevice_name
Accept: application/nipc+json
Host: localhost
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
[
  {
    "property": "https://example.com/thermometer#/sdfThing/thermo\
meter/sdfProperty/device_name",
    "value": "dGVzdA=="
  }
]
```

- * Write to a property on the BLE device

===== NOTE: '\ ' line wrapping per RFC 8792 =====

PUT /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/properties

Content-Type: application/nipc+json

Host: localhost

```
[
  {
    "property": "https://example.com/thermometer#/sdfThing/thermo\
meter/sdfProperty/device_name",
    "value": "dGVzdA=="
  }
]
```

HTTP/1.1 200 OK

content-type: application/nipc+json

```
[
  {
    "property": "https://example.com/thermometer#/sdfThing/thermo\
meter/sdfProperty/device_name",
    "value": "dGVzdA=="
  }
]
```

8.2. Enabling an Event on a Device

In this example, we will declare a device instance, and setup an advertisement subscription event for that device.

The sequence of operations for this are:

- * Declaring a device instance and endpoint app using the SCIM Interface (out of scope of this memo)
- * Register an SDF model for the device

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /registrations/models
Content-Type: application/sdf+json
Accept: application/nipc+json
Host: localhost
```

```
{ ... }
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
[
  {
    "sdfName": "https://example.com/thermometer#/sdfThing/thermom\
eter"
  }
]
```

Request Body: JSON object with the SDF model, from Appendix F

- * Register the data app with the event

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /registrations/data-apps?dataAppId=0927ce7c-b258-4bfa-a345-\
bcc9f74385b4
Content-Type: application/nipc+json
Accept: application/nipc+json
Host: localhost
```

```
{
  "events": [
    "https://example.com/thermometer#/sdfThing/thermometer/sdfEve\
nt/isPresent"
  ],
  "mqttClient": true
}
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
{
  "events": [
    "https://example.com/thermometer#/sdfThing/thermometer/sdfEve\
nt/isPresent"
  ],
  "mqttClient": true
}
```

- * Enable the advertisement event

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/events?eventNa\
me=https%23%2F%2Fexample.com%2Fthermometer%23%2FsdfThing%2Fthermo\
meter%2FsdfEvent%2FisPresent
Host: localhost
Content-Length: 0
```

```
HTTP/1.1 201 Created
Location: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/events?in\
stanceId=02ee282c-8915-4b2e-bbd2-88966773134a
```

- * Check the status of the event

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
GET /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/events?instance\
Id=02ee282c-8915-4b2e-bbd2-88966773134a
```

```
Host: localhost
```

```
HTTP/1.1 200 OK
```

```
content-type: application/nipc+json
```

```
{
  "event": "https://example.com/thermometer#/sdfThing/thermometer\
/sdfEvent/isPresent"
}
```

8.3. Enabling an Event on a Group of Devices

In this example, we will enable an advertisement subscription event for a group of devices.

The sequence of operations for this are:

- * Provision a device and endpoint app using the SCIM Interface (out of scope of this memo)
- * Register an SDF model for the devices

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /registrations/models
```

```
Content-Type: application/sdf+json
```

```
Accept: application/nipc+json
```

```
Host: localhost
```

```
{ ... }
```

```
HTTP/1.1 200 OK
```

```
content-type: application/nipc+json
```

```
[
  {
    "sdfName": "https://example.com/thermometer#/sdfThing/thermom\
eter"
  }
]
```

Request Body: JSON object with the SDF model, from Appendix F

- * Register the data app with the event

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /registrations/data-apps?dataAppId=0927ce7c-b258-4bfa-a345-\
bcc9f74385b4
Content-Type: application/nipc+json
Accept: application/nipc+json
Host: localhost
```

```
{
  "events": [
    "https://example.com/thermometer#/sdfThing/thermometer/sdfEve\
nt/isPresent"
  ],
  "mqttClient": true
}
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
{
  "events": [
    "https://example.com/thermometer#/sdfThing/thermometer/sdfEve\
nt/isPresent"
  ],
  "mqttClient": true
}
```

- * Enable the advertisement event on a group of devices

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
POST /groups/0dc729d7-f6c3-491d-9b9d-e7176d2be243/events?eventNa\
me=https%23%2F%2Fexample.com%2Fthermometer%23%2FsdfThing%2Fthermo\
meter%2FsdfEvent%2FisPresent
Host: localhost
Content-Length: 0
```

```
HTTP/1.1 201 Created
Location: /groups/0dc729d7-f6c3-491d-9b9d-e7176d2be243/events?in\
stanceId=f1b9f26b-21ce-4deb-9d57-289ba7e17cce
```

- * Check the status of the event

===== NOTE: '\ ' line wrapping per RFC 8792 =====

```
GET /groups/0dc729d7-f6c3-491d-9b9d-e7176d2be243/events?instance\
Id=f1b9f26b-21ce-4deb-9d57-289ba7e17cce
Host: localhost
```

```
HTTP/1.1 200 OK
content-type: application/nipc+json
```

```
[
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsen\
sor/sdfEvent/fallDetected",
    "deviceId": "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsen\
sor/sdfEvent/fallDetected",
    "deviceId": "d62c7fb2-a216-4811-a388-053b17fdbedc"
  },
  {
    "event": "https://example.com/heartrate#/sdfObject/healthsen\
sor/sdfEvent/fallDetected",
    "deviceId": "01b52a23-b98c-454c-ba9e-086a43bdfd79"
  },
  {
    "type": "https://www.iana.org/assignments/nipc-problem-types\
#event-not-enabled",
    "status": 400,
    "title": "Event Not Enabled",
    "deviceId": "9171ec16-e3c1-4ccf-ad23-b92a1a3f069d",
    "detail": "Failed to disable the event for device 9171ec16-e\
3c1-4ccf-ad23-b92a1a3f069d"
  }
]
```

9. Implementation Status

This section is to be removed before publishing as an RFC.

This section records the status of known implementations of the protocol defined by this specification at the time of posting of this Internet-Draft, and is based on a proposal described in [RFC7942]. The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs. Please note that the listing of any individual implementation here does not imply endorsement by the IETF. Furthermore, no effort has been spent to verify the information presented here that was

supplied by IETF contributors. This is not intended as, and must not be construed to be, a catalog of available implementations or their features. Readers are advised to note that other implementations may exist.

According to [RFC7942], "this will allow reviewers and working groups to assign due consideration to documents that have the benefit of running code, which may serve as evidence of valuable experimentation and feedback that have made the implemented protocols more mature. It is up to the individual working groups to use this information as they see fit".

9.1. TieDie IoT

Organization: Cisco Systems, North Carolina State University

Description: Open-source implementation of the NIPC APIs and gateway functionality for BLE. Client libraries and sample application functions for Python and Java are also provided.

Level of maturity: Open-source prototype

Coverage: All NIPC APIs for BLE protocol mapping

Version compatibility: All versions up to draft-16

Licensing: Apache License, Version 2.0

URL: <https://github.com/iot-onboarding/tiedie>

9.2. Cisco Sensor Connect for IoT Services (Catalyst)

Organization: Cisco Systems

Description: Commercial solution that delivers advanced BLE capabilities over Cisco Wireless infrastructure.

Level of maturity: Production

Coverage: All NIPC APIs for BLE protocol mapping

Version compatibility: draft-00

Licensing: Proprietary

URL: <https://developer.cisco.com/docs/spaces-connect-for-iot-services/>

9.3. Cisco Sensor Connect for IoT Services (Meraki)

Organization: Cisco Systems

Description: Commercial solution that delivers advanced BLE capabilities over Cisco Wireless infrastructure.

Level of maturity: Beta

Coverage: All NIPC APIs for BLE protocol mapping

Version compatibility: draft-16

Licensing: Proprietary

9.4. NIPC Prototype

Organization: Ericsson Research

Description: Prototype implementation in C of the NIPC API.

Level of maturity: Research prototype

Coverage: Registration and NIPC operations

Version compatibility: Draft-04

Licensing: Proprietary

Contact: Lorenzo Corneo lorenzo.corneo@ericsson.com
(<mailto:lorenzo.corneo@ericsson.com>)

10. Security Considerations

10.1. Payload Encryption Considerations

Responses to NIPC operations requests may contain sensitive or confidential information. Therefore, application and device implementations should consider payload encryption. NIPC does not provide any payload encryption mechanism. If payload encryption is required, it MUST be provided by the underlying device protocol (e.g., BLE security modes) or by the transport-layer security mechanism (e.g., TLS).

10.2. TLS Support Considerations

NIPC MUST run on top of a transport-layer security mechanism such as TLS. When leveraging TLS, the NIPC gateway MUST support TLS 1.2 [RFC5246] and TLS 1.3 [RFC8446] and MAY support additional transport-layer mechanisms. When using TLS, the client MUST perform a TLS/SSL server identity check, per [RFC6125]. Implementation security considerations for TLS can be found in [RFC7525].

10.3. HTTP Considerations

NIPC runs on top of HTTP and is thus subject to the security considerations of HTTP Section 9 of [RFC7230].

10.4. Authorization Considerations

10.4.1. API authorization Considerations

To enable NIPC gateway functions, the network administrator MUST authorize applications (e.g., via exchange of tokens or public keys). Authorization MAY be role-based. The following baseline roles are RECOMMENDED:

- * Provisioning: permitted to create and manage device and endpoint-app identities via SCIM (typically co-located with the gateway).
- * Control: permitted to invoke NIPC property, action, and event APIs.
- * Data: permitted to receive streamed event data. Deployments MAY further refine authorization at per-API or per-affordance granularity.

10.4.2. Authorization Token/Bearer Token/Cookie Considerations

When using authorization tokens such as those issued by OAuth 2.0 [RFC6749], implementers MUST take into account threats and countermeasures as documented in Section 8 of [RFC7521].

Since the possession of a bearer token, Authorization token, or cookie MAY authorize the holder to perform NIPC Operations on devices, tokens and cookies MUST contain sufficient entropy to prevent random guessing attack; for example, see Section 5.2 of [RFC6750] and Section 5.1.4.2.2 of [RFC6819].

As with all NIPC communications, bearer tokens and HTTP cookies MUST be exchanged using transport-layer security mechanism such as TLS.

Bearer tokens MUST have a limited lifetime that can be determined directly or indirectly (e.g., by checking with a validation service) by the application. By expiring tokens, applications are forced to obtain a new token (which usually involves re-authentication) for continued authorized access. For example, in OAuth 2.0, an application MAY use OAuth token refresh to obtain a new bearer token after authenticating to an authorization server. See Section 6 of [RFC6749]. As with bearer tokens, an HTTP cookie SHOULD last no longer than the lifetime of a browser session. An expiry time should be set that limits session cookie lifetime as per Section 5.2.1 of [RFC6265].

Implementations supporting OAuth bearer tokens need to factor in security considerations of this authorization method [RFC7521]. Implementers also need to consider authentication choices coupled with OAuth bearer tokens. For example, when using OAuth bearer tokens with client authentication via client credentials Section 4.4 of [RFC6749], implementers need to consider the security considerations of client authentication via client credentials as described in Section 3.2 of [RFC6819].

10.5. Other Security Considerations

- * Preventing automated attacks: It is recommended to limit the number of requests that any particular application MAY make in a period of time.
- * Logging and monitoring: It is recommended to log and monitor API usage to detect potential abuse or attacks.
- * Input validation: It is recommended to validate all inputs to prevent injection attacks.
- * Error handling: It is recommended to handle errors gracefully without exposing sensitive information.
- * Least privilege: It is recommended to follow the principle of least privilege when granting access to resources.
- * Storage and handling of sensitive data: Credentials MUST NOT be stored in clear-text, but MUST be stored using an encrypted protection mechanism (e.g., hashing).

11. IANA Considerations

This section provides guidance to the Internet Assigned Numbers Authority (IANA) regarding registration of values related to NIPC, in accordance with [RFC8126].

11.1. Media Type Registration

This document registers the "application/nipc+json" media type for messages of the NIPC APIs defined in this document carrying parameters encoded in JSON.

Type name: application

Subtype name: nipc+json

Required parameters: none

Optional parameters: none

Encoding considerations: Encoding considerations are identical to those specified for the "application/json" media type.

Security considerations: See the Section 10 section of this document.

Interoperability considerations: none

Published specification: This document, the NIPC API specification.

Applications that use this media type: Applications implementing NIPC APIs for IoT device management.

Fragment identifier considerations: none

Additional information:

- * Deprecated alias names for this type: none

- * Magic number(s): none

- * File extension(s): none

- * Macintosh file type code(s): none

Person & email address to contact for further information:

Intended usage: LIMITED USE

Restrictions on usage: To be used for NIPC APIs as defined in this document.

Author:

Change controller: IETF

11.2. API extensions

IANA is requested to create a new registry called "NIPC API extensions".

The registry must contain following attributes:

- * Extension URI
- * Extension name
- * Description
- * Openapi model describing the extension. This model must be reviewed by an expert.

Following API extensions are described in this document:

Extension URI	Extension name	Description	Model reference
/extensions/{id}/bulk	Bulk API	Call multiple NIPC's in a single request	Appendix D
/extensions/{id}/properties/file	File write API	Write a file with multiple property ops	Appendix D
/extensions/{id}/properties/blob	Binary write API	Write a binary blob with multiple property ops	Appendix D
/extensions/{id}/properties/read/conditional	Read conditional API	Read a property until a condition is fulfilled	Appendix D
/extensions/{id}/events/conditional	Event conditional API	Enable an event until a condition is fulfilled	Appendix D
/extensions/{id}/transmit	Transmit API	Transmits a payload to a device	Appendix D

Table 4

11.3. Well-known URIs

IANA is requested to register the following well-known URI in the "Well-Known URIs" registry as defined by [RFC8615]:

URI Suffix	Change Controller	Specification Document
nipc	IETF	This document, Section 2.5.1

Table 5

The well-known URI for NIPC is:

`/.well-known/nipc`

11.4. Problem Details for NIPC APIs

IANA is requested to create a new registry, the "NIPC Problem Type" registry, with following URL: <https://www.iana.org/assignments/nipc-problem-types>.

Registrations MUST use the prefix "https://iana.org/assignments/nipc-problem-types#" for the type URI.

The registration requests MUST use the template defined in Section 4.2 of [RFC9457].

IANA is requested to register the following URIs in the "NIPC Problem Type" registry:

Problem Type URI	Description	Reference
https://www.iana.org/assignments/nipc-problem-types#invalid-id	Invalid device ID or gateway doesn't recognize the ID	This document
https://www.iana.org/assignments/nipc-problem-types#invalid-sdf-url	Invalid SDF URL or SDF affordance not found	This document
https://www.iana.org/assignments/nipc-problem-types#extension-operation-not-executed	Operation was not executed since the previous operation failed	This document
https://www.iana.org/assignments/nipc-problem-types#sdf-model	SDF model already	This document

already-registered	registered	
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#sdf-model-in-use	SDF model in use	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#unsupported-uri-scheme	Unsupported URI scheme	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#property-not-readable	Property not readable	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#property-read-failed	Property read failed	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#property-not-writable	Property not writable	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#property-write-failed	Property write failed	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#event-already-enabled	Event already enabled	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#event-not-enabled	Event not enabled	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#event-not-registered	Event not registered for any data application	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-already-connected	Device already connected	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-no-connection	No connection found for device	This document
+-----+-----+-----+		
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-no-connection	BLE connection	This

nipc-problem-types#protocolmap-ble-connection-timeout	timeout	document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-bonding-failed	BLE bonding failed	This document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-connection-failed	BLE connection failed	This document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-service-discovery-failed	BLE service discovery failed	This document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-ble-invalid-service-or-characteristic	Invalid BLE service or characteristic ID	This document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-zigbee-connection-timeout	Zigbee connection timeout	This document
https://www.iana.org/assignments/nipc-problem-types#protocolmap-zigbee-invalid-endpoint-or-cluster	Invalid Zigbee endpoint or cluster ID	This document
https://www.iana.org/assignments/nipc-problem-types#extension-broadcast-invalid-data	Invalid transmit data	This document
https://www.iana.org/assignments/nipc-problem-types#extension-firmware-rollback	Firmware rollback	This document
https://www.iana.org/assignments/nipc-problem-types#extension-firmware-update-failed	Firmware update failed	This document

Table 6

Each Problem Type URI is intended for use as the "type" member in Problem Details responses as described.

12. References

12.1. Normative References

[I-D.ietf-asdf-sdf]

Koster, M., Bormann, C., and A. Kernén, "Semantic Definition Format (SDF) for Data and Interactions of Things", Work in Progress, Internet-Draft, draft-ietf-asdf-sdf-25, 13 October 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-asdf-sdf-25>>.

[I-D.ietf-asdf-sdf-protocol-mapping]

Mohan, R., Brinckman, B., and L. Corneo, "Protocol Mapping for SDF", Work in Progress, Internet-Draft, draft-ietf-asdf-sdf-protocol-mapping-03, 20 January 2026, <<https://datatracker.ietf.org/doc/html/draft-ietf-asdf-sdf-protocol-mapping-03>>.

[I-D.ietf-scim-device-model]

Shahzad, M., Iqbal, H., and E. Lear, "Device Schema Extensions to the SCIM model", Work in Progress, Internet-Draft, draft-ietf-scim-device-model-18, 3 September 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-scim-device-model-18>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC3986] Berners-Lee, T., Fielding, R., and L. Masinter, "Uniform Resource Identifier (URI): Generic Syntax", STD 66, RFC 3986, DOI 10.17487/RFC3986, January 2005, <<https://www.rfc-editor.org/info/rfc3986>>.

[RFC4648] Josefsson, S., "The Base16, Base32, and Base64 Data Encodings", RFC 4648, DOI 10.17487/RFC4648, October 2006, <<https://www.rfc-editor.org/info/rfc4648>>.

[RFC5246] Dierks, T. and E. Rescorla, "The Transport Layer Security (TLS) Protocol Version 1.2", RFC 5246, DOI 10.17487/RFC5246, August 2008, <<https://www.rfc-editor.org/info/rfc5246>>.

- [RFC6125] Saint-Andre, P. and J. Hodges, "Representation and Verification of Domain-Based Application Service Identity within Internet Public Key Infrastructure Using X.509 (PKIX) Certificates in the Context of Transport Layer Security (TLS)", RFC 6125, DOI 10.17487/RFC6125, March 2011, <<https://www.rfc-editor.org/info/rfc6125>>.
- [RFC6265] Barth, A., "HTTP State Management Mechanism", RFC 6265, DOI 10.17487/RFC6265, April 2011, <<https://www.rfc-editor.org/info/rfc6265>>.
- [RFC6570] Gregorio, J., Fielding, R., Hadley, M., Nottingham, M., and D. Orchard, "URI Template", RFC 6570, DOI 10.17487/RFC6570, March 2012, <<https://www.rfc-editor.org/info/rfc6570>>.
- [RFC6749] Hardt, D., Ed., "The OAuth 2.0 Authorization Framework", RFC 6749, DOI 10.17487/RFC6749, October 2012, <<https://www.rfc-editor.org/info/rfc6749>>.
- [RFC6750] Jones, M. and D. Hardt, "The OAuth 2.0 Authorization Framework: Bearer Token Usage", RFC 6750, DOI 10.17487/RFC6750, October 2012, <<https://www.rfc-editor.org/info/rfc6750>>.
- [RFC6819] Lodderstedt, T., Ed., McGloin, M., and P. Hunt, "OAuth 2.0 Threat Model and Security Considerations", RFC 6819, DOI 10.17487/RFC6819, January 2013, <<https://www.rfc-editor.org/info/rfc6819>>.
- [RFC7230] Fielding, R., Ed. and J. Reschke, Ed., "Hypertext Transfer Protocol (HTTP/1.1): Message Syntax and Routing", RFC 7230, DOI 10.17487/RFC7230, June 2014, <<https://www.rfc-editor.org/info/rfc7230>>.
- [RFC7468] Josefsson, S. and S. Leonard, "Textual Encodings of PKIX, PKCS, and CMS Structures", RFC 7468, DOI 10.17487/RFC7468, April 2015, <<https://www.rfc-editor.org/info/rfc7468>>.
- [RFC7521] Campbell, B., Mortimore, C., Jones, M., and Y. Goland, "Assertion Framework for OAuth 2.0 Client Authentication and Authorization Grants", RFC 7521, DOI 10.17487/RFC7521, May 2015, <<https://www.rfc-editor.org/info/rfc7521>>.

- [RFC7525] Sheffer, Y., Holz, R., and P. Saint-Andre, "Recommendations for Secure Use of Transport Layer Security (TLS) and Datagram Transport Layer Security (DTLS)", RFC 7525, DOI 10.17487/RFC7525, May 2015, <<https://www.rfc-editor.org/info/rfc7525>>.
- [RFC7643] Hunt, P., Ed., Grizzle, K., Wahlstroem, E., and C. Mortimore, "System for Cross-domain Identity Management: Core Schema", RFC 7643, DOI 10.17487/RFC7643, September 2015, <<https://www.rfc-editor.org/info/rfc7643>>.
- [RFC7644] Hunt, P., Ed., Grizzle, K., Ansari, M., Wahlstroem, E., and C. Mortimore, "System for Cross-domain Identity Management: Protocol", RFC 7644, DOI 10.17487/RFC7644, September 2015, <<https://www.rfc-editor.org/info/rfc7644>>.
- [RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", BCP 26, RFC 8126, DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8259] Bray, T., Ed., "The JavaScript Object Notation (JSON) Data Interchange Format", STD 90, RFC 8259, DOI 10.17487/RFC8259, December 2017, <<https://www.rfc-editor.org/info/rfc8259>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [RFC8610] Birkholz, H., Vigano, C., and C. Bormann, "Concise Data Definition Language (CDDL): A Notational Convention to Express Concise Binary Object Representation (CBOR) and JSON Data Structures", RFC 8610, DOI 10.17487/RFC8610, June 2019, <<https://www.rfc-editor.org/info/rfc8610>>.
- [RFC8615] Nottingham, M., "Well-Known Uniform Resource Identifiers (URIs)", RFC 8615, DOI 10.17487/RFC8615, May 2019, <<https://www.rfc-editor.org/info/rfc8615>>.
- [RFC8949] Bormann, C. and P. Hoffman, "Concise Binary Object Representation (CBOR)", STD 94, RFC 8949, DOI 10.17487/RFC8949, December 2020, <<https://www.rfc-editor.org/info/rfc8949>>.

- [RFC9110] Fielding, R., Ed., Nottingham, M., Ed., and J. Reschke, Ed., "HTTP Semantics", STD 97, RFC 9110, DOI 10.17487/RFC9110, June 2022, <<https://www.rfc-editor.org/info/rfc9110>>.
- [RFC9457] Nottingham, M., Wilde, E., and S. Dalal, "Problem Details for HTTP APIs", RFC 9457, DOI 10.17487/RFC9457, July 2023, <<https://www.rfc-editor.org/info/rfc9457>>.
- [RFC9562] Davis, K., Peabody, B., and P. Leach, "Universally Unique IDentifiers (UUIDs)", RFC 9562, DOI 10.17487/RFC9562, May 2024, <<https://www.rfc-editor.org/info/rfc9562>>.

12.2. Informative References

- [BLE53] Bluetooth SIG, "Bluetooth Core Specification, Version 5.3", 2021.
- [Gatt-REST-API] Bluetooth SIG, "A RESTful API used to access data in devices using the functionality defined in the Bluetooth GATT profile", 2017, <<https://www.bluetooth.com/bluetooth-resources/gatt-rest-api/>>.
- [RFC7252] Shelby, Z., Hartke, K., and C. Bormann, "The Constrained Application Protocol (CoAP)", RFC 7252, DOI 10.17487/RFC7252, June 2014, <<https://www.rfc-editor.org/info/rfc7252>>.
- [RFC7942] Sheffer, Y. and A. Farrel, "Improving Awareness of Running Code: The Implementation Status Section", BCP 205, RFC 7942, DOI 10.17487/RFC7942, July 2016, <<https://www.rfc-editor.org/info/rfc7942>>.
- [Zigbee22] Connectivity Standards Alliance, "Zigbee Specification, Version 22 1.0", 2017.

Appendix A. OpenAPI definition

The following non-normative model is provided for convenience of the implementor.

```
<CODE BEGINS> file "openapi.yml"
===== NOTE: '\\\' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-1\
\2/schema
openapi: 3.0.3
```

```
info:
  title: Non IP Device Control (NIPC) API
  description: |-
    This API specifies RESTful application layer interface for
    gateways providing operations against non-IP devices. The
    described interface is extensible. The examples includes
    leverage Bluetooth Low Energy and Zigbee as they are commonly
    deployed.
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:
  - name: NIPC property APIs
    description: |-
      APIs that allow apps to get and update device properties.
      If the underlying protocol requires connection management, it
      will be performed as part of the API call.
  - name: NIPC event APIs
    description: |-
      APIs that allow apps to enable or disable event reporting on
      devices. If the underlying protocol requires connection
      management, it will be performed as part of the API call.
  - name: NIPC action APIs
    description: |-
      APIs that perform actions on devices or groups.
  - name: NIPC trigger APIs
    description: |-
      APIs that install triggers on actions and events for devices
      or groups. A trigger always triggers an action.
  - name: NIPC management APIs
    description: |-
      APIs that manage device connections.
  - name: NIPC registration APIs
    description: |-
      APIs that register sdf models or data applications
```

```
paths:
  ### NIPC Property APIs
  /devices/{id}/properties:
    put:
      tags:
        - NIPC property APIs
      summary: Update a value of one or more properties on a device
      description: |-
        Write a value to a property or multiple properties to a
        device. If underlying protocol requires a connection to be
        set up, this API call will perform the necessary connection
        management. If a connection is already active for this
        device, the existing connection will be leveraged without
        modifying it.
      operationId: UpdateProperties
      parameters:
        - name: id
          in: path
          description: The ID of the device. Group ID is not allowed.
          required: true
          schema:
            type: string
            format: uuid
            example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
        - name: propertyName
          in: query
          description: |-
            The SDF property name that needs to be written to.
          required: false
          allowReserved: true
          schema:
            type: string
            example: "https://example.com/heartrate#/sdfObject/thermos\
\tat/sdfProperty/temperature"
      requestBody:
        description: |-
          The value to be written to the property or properties.
          If multiple properties are specified, the request body
          should be application/nipc+json.
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/PropertyValueArray'
            "*/*":
              schema:
                description: |-
                  Any other content type, such as
                  application/octet-stream, application/json that will
```

```
        be written to the device.
    required: true
    responses:
      '204':
        description: |-
          Success, no content, used for a single property write
      '200':
        description: Success, used for multiple property writes
        content:
          application/nipc+json:
            schema:
              allOf:
                - $ref: '#/components/schemas/PropertyValueRespon\
\eArray'
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC property APIs
  summary: |-
    Read a value from one or multiple properties on a device
  description: |-
    Read a value to a property or multiple properties from a
    device. If underlying protocol requires a connection to be
    set up, this API call will perform the necessary connection
    management. If a connection is already active for this
    device, the existing connection will be leveraged without
    modifying it.
  operationId: GetProperties
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: propertyName
      in: query
      description: Properties to be read
      required: true
      allowReserved: true
```

```

    schema:
      type: array
      items:
        type: string
        example: "https://example.com/hearttrate#/sdfObject/therm\
\ostat/sdfProperty/temperature"
    responses:
      '200':
        description: Success
        content:
          application/nipc+json:
            schema:
              allOf:
                - $ref: '#/components/schemas/Id'
                - $ref: '#/components/schemas/PropertyValueReadRes\
\ponseArray'
            "*/*":
              schema:
                type: string
                description: |-
                  Any other content type, such as
                  application/octet-stream, application/json that
                  will be read from the device.
        default:
          description: Error response
          content:
            application/problem+json:
              schema:
                $ref: '#/components/schemas/FailureResponse'

### NIPC Event APIs
/devices/{id}/events:
  post:
    tags:
      - NIPC event APIs
    summary: Enable an event on a specific device
    description: |-
      Enable an event on a specific device or for a group of
      devices. If the underlying protocol requires a connection to
      be set up, this API call will perform the necessary
      connection management. If a connection is already active for
      this device, the existing connection will be leveraged
      without modifying it.
    operationId: EnableEvent
    parameters:
      - name: id
        in: path
        description: The ID of the device.

```

```

    required: true
    schema:
      type: string
      format: uuid
      example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  - name: eventName
    in: query
    description: event that needs to be enabled
    required: true
    allowReserved: true
    schema:
      type: string
      example: "https://example.com/hearttrate#/sdfObject/healths\
\ensor/sdfEvent/fallDetected"
    responses:
      '201':
        description: Success
        headers:
          Location:
            description: Location of the created event
            schema:
              type: string
              format: uri
              example: "/devices/{id}/events?instanceId={instanceI\
\d}"
        default:
          description: Error response
          content:
            application/problem+json:
              schema:
                $ref: '#/components/schemas/FailureResponse'

delete:
  tags:
    - NIPC event APIs
  summary: Disable an event on a specific device
  description: |-
    Disable an event on a specific device or a group of devices.
    If the underlying protocol requires a connection to be set
    up, this API call will perform the necessary connection
    management. If a connection is already active for this
    device, the existing connection will be leveraged without
    modifying it.
  operationId: DisableEvent
  parameters:
    - name: id
      in: path
      description: The ID of the device.

```

```
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
- name: instanceId
  in: query
  description: instance id of the event that needs to be disap\
\led
      required: true
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
responses:
  '204':
    description: Success, no content
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC event APIs
  summary: Get status of events on a device
  description: |-
    Get status of an event or multiple events on a specific devi\
\ce
  operationId: GetEvents
  parameters:
    - name: id
      in: path
      description: The ID of the device.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        Instance ID of the events that need to be filtered
      required: false
      schema:
        type: array
```

```
    items:
      type: string
      format: uuid
      example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '200':
      description: Success
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/EventStatusResponseArray'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'

/groups/{id}/events:
  post:
    tags:
      - NIPC event APIs
    summary: Enable an event on a group of devices
    description: |-
      Enable an event on a group of devices.
      If the underlying protocol requires a connection to be set
      up, this API call will perform the necessary connection
      management. If a connection is already active for this
      device, the existing connection will be leveraged without
      modifying it.
    operationId: EnableGroupEvent
    parameters:
      - name: id
        in: path
        description: |-
          group id for which the event needs to be enabled
        required: true
        schema:
          type: string
          format: uuid
          example: 0dc729d7-f6c3-491d-9b9d-e7176d2be243
      - name: eventName
        in: query
        description: event that needs to be enabled
        required: true
        allowReserved: true
        schema:
          type: string
```



```

        example: "https://example.com/heartrate#/sdfObject/healths\
\ensor/sdfEvent/fallDetected"
        responses:
          '201':
            description: Success, event enabled
            headers:
              Location:
                description: Location of the created event
                schema:
                  type: string
                  format: uri
                  example: "/groups/{id}/events?instanceId={instanceId}\
\}"
            default:
              description: Error response
              content:
                application/problem+json:
                  schema:
                    $ref: '#/components/schemas/FailureResponse'
      delete:
        tags:
          - NIPC event APIs
        summary: Disable an event on a group of devices
        description: |-
          Disable an event on a group of devices. If the underlying
          protocol requires a connection to be set up, this API call
          will perform the necessary connection management.
          If a connection is already active for this device, the
          existing connection will be leveraged without modifying it.
        operationId: DisableGroupEvent
        parameters:
          - name: id
            in: path
            description: |-
              group id for which the event needs to be disabled
            required: true
            schema:
              type: string
              format: uuid
              example: 0dc729d7-f6c3-491d-9b9d-e7176d2be243
          - name: instanceId
            in: query
            description: instance id of the event that needs to be disab\
\led
            required: true
            schema:
              type: string
              format: uuid

```

```
    example: f1b9f26b-21ce-4deb-9d57-289ba7e17cce
  responses:
    '200':
      description: Success, event disabled
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/GroupEventStatusResponse\
\Array'
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/FailureResponse'
  get:
    tags:
      - NIPC event APIs
    summary: Get status of events on a group of devices
    description: |-
      Get status of an event or multiple events on a group of devi\
\ces.
    operationId: GetGroupEvents
    parameters:
      - name: id
        in: path
        description: group id of the SCIM group
        required: true
        schema:
          type: string
          format: uuid
          example: 0dc729d7-f6c3-491d-9b9d-e7176d2be243
      - name: instanceId
        in: query
        description: |-
          Instance IDs of the events that need to be filtered
        required: false
        schema:
          type: string
          format: uuid
          example: f1b9f26b-21ce-4deb-9d57-289ba7e17cce
    responses:
      '200':
        description: Success, events retrieved
        content:
          application/nipc+json:
            schema:
              $ref: '#/components/schemas/GroupEventStatusResponse\
```

```
\Array'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'

### NIPC action APIs
/devices/{id}/actions:
  post:
    tags:
      - NIPC action APIs
    summary: Perform an action on a device
    description: |-
      Perform an action on a device.
      If the underlying protocol requires a connection to be set
      up, this API call will perform the necessary connection
      management. If a connection is already active for this
      device, the existing connection will be leveraged without
      modifying it.
    operationId: ActionProperty
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: actionName
        in: query
        description: action that needs to be performed
        required: true
        allowReserved: true
        schema:
          type: string
          example: "https://example.com/heartrate#/sdfObject/healths\
\ensor/sdfAction/start"
    requestBody:
      content:
        application/octet-stream:
          schema:
            type: string
            format: binary
          required: false
    responses:
```

```
'202':
  description: Accepted, action is being performed
  headers:
    Location:
      description: Location of the action
      schema:
        type: string
        format: uri
        example: "/devices/{id}/actions?instanceId={instance\
\Id}"
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'
get:
  tags:
    - NIPC action APIs
  summary: Get status of an action on a device
  description: |-
    Get status of an action on a specific device or a group of
    devices. Success is action is active, failure if action not
    active.
  operationId: GetAction
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        instance id of the action that needs to be checked
      required: true
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '200':
      description: Success, action is active
      content:
        application/nipc+json:
```

```
        schema:
          $ref: '#/components/schemas/ActionResponse'
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/FailureResponse'

/groups/{id}/actions:
  post:
    tags:
      - NIPC action APIs
    summary: Perform an action on a group
    description: |-
      Perform an action on a group of decvices
      If the underlying protocol requires a connection to be set
      up, this API call will perform the necessary connection
      management. If a connection is already active for this
      device, the existing connection will be leveraged without
      modifying it.
    operationId: ActionGroupProperty
    parameters:
      - name: id
        in: path
        description: The ID of the group.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: actionName
        in: query
        description: action that needs to be performed
        required: true
        allowReserved: true
        schema:
          type: string
          example: "https://example.com/heartrate#/sdfObject/healths\
\ensor/sdfAction/start"
    requestBody:
      content:
        application/octet-stream:
          schema:
            type: string
            format: binary
          required: false
    responses:
```

```
'202':
  description: Accepted, action is being performed
  headers:
    Location:
      description: Location of the action
      schema:
        type: string
        format: uri
        example: "/groups/{id}/actions?instanceId={instanceI\
\d}"
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'
get:
  tags:
    - NIPC action APIs
  summary: Get status of an action on a group
  description: |-
    Get status of an action on a specific group of
    devices. Success is action is active, failure if action not
    active.
  operationId: GetGroupAction
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        instance id of the action that needs to be checked
      required: true
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '200':
      description: Success, action is active
      content:
        application/nipc+json:
```

```
        schema:
          $ref: '#/components/schemas/GroupActionStatusResponse'\eArray'
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/FailureResponse'

### NIPC Trigger APIs
/devices/{id}/triggers:
  post:
    tags:
      - NIPC trigger APIs
    summary: create a trigger on an affordance of a device
    description: |-
      Creates a trigger on an affordance of a device. A trigger
      will trigger an action on another device or a group of device\es
    operationId: CreateTrigger
    parameters:
      - name: id
        in: path
        description: The ID of the device.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: sdfName
        in: query
        description: |-
          sdf affordance that will trigger this action, this can be
          either an event or an action
        required: true
        allowReserved: true
        schema:
          type: string
          example: "https://example.com/heartrate#/sdfObject/healths\ensor/sdfEvent/fallDetected"
    requestBody:
      description: |-
        The NIPC API call to be called when the trigger is
        executed.
      content:
        application/nipc+json:
          schema:
```

```
        $ref: '#/components/schemas/Action'
    required: true
    responses:
      '201':
        description: Success
        headers:
          Location:
            description: Location of the created trigger
            schema:
              type: string
              format: uri
              example: "/devices/{id}/triggers?instanceId={instanc\
\eid}"
        default:
          description: Error response
          content:
            application/problem+json:
              schema:
                $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC trigger APIs
  summary: Get information about a trigger or all triggers
  description: |-
    Get information about a trigger for a device or all triggers
    if none specified
  operationId: GetTrigger
  parameters:
    - name: id
      in: path
      description: The ID of the device.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        instance id of the action that needs to be checked
      required: false
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '200':
```



```

        description: Success, action is active
        content:
          application/nipc+json:
            schema:
              $ref: '#/components/schemas/TriggerStatusResponseArr\
\ay'
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '#/components/schemas/FailureResponse'

delete:
  tags:
    - NIPC trigger APIs
  summary: Delete a trigger or all triggers for a device
  description: |-
    Delete a trigger for a device or all triggers
    if none specified
  operationId: DeteteTrigger
  parameters:
    - name: id
      in: path
      description: The ID of the device.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        instance id of the action that needs to be checked
      required: false
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '204':
      description: Success, no content
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/FailureResponse'

```

```

/groups/{id}/triggers:
  post:
    tags:
      - NIPC trigger APIs
    summary: create a trigger on an affordance of a group
    description: |-
      Creates a trigger on an affordance of a group of devices. A \
\trigger
      will trigger an action on a device or a group of devices
    operationId: CreateTrigger
    parameters:
      - name: id
        in: path
        description: The ID of the group
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: sdfName
        in: query
        description: |-
          sdf affordance that will trigger this action, this can be
          either an event or an action
        required: true
        allowReserved: true
        schema:
          type: string
          example: "https://example.com/heartrate#/sdfObject/healths\
\ensor/sdfEvent/fallDetected"
    requestBody:
      description: |-
        The NIPC API call to be called when the trigger is
        executed, as well as the device or group it is to be execu\
\ted against.
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/Action'
          required: true
    responses:
      '201':
        description: Success
        headers:
          Location:
            description: Location of the created trigger
            schema:
              type: string

```

```
        format: uri
        example: "/devices/{id}/triggers?instanceId={instanc\
\eid}"
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/FailureResponse'
  get:
    tags:
      - NIPC trigger APIs
    summary: Get information about a trigger or all triggers
    description: |-
      Get information about a trigger or all triggers
      if none specified
    operationId: GetTrigger
    parameters:
      - name: id
        in: path
        description: The ID of the group
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: instanceId
        in: query
        description: |-
          instance id of the action that needs to be checked
        required: false
        schema:
          type: string
          format: uuid
          example: 02ee282c-8915-4b2e-bbd2-88966773134a
    responses:
      '200':
        description: Success, action is active
        content:
          application/nipc+json:
            schema:
              $ref: '#/components/schemas/TriggerResponse'
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/FailureResponse'
```

```

delete:
  tags:
    - NIPC trigger APIs
  summary: Delete a trigger or all triggers for a group of devices
  description: |-
    Delete a trigger for a group of devices or all triggers
    for a group of devices if none specified
  operationId: DeleteTrigger
  parameters:
    - name: id
      in: path
      description: The ID of the group of devices.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: instanceId
      in: query
      description: |-
        instance id of the action that needs to be checked
      required: false
      schema:
        type: string
        format: uuid
        example: 02ee282c-8915-4b2e-bbd2-88966773134a
  responses:
    '200':
      description: Success, trigger deleted
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/TriggerStatusResponseArr'
\ay'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          $ref: '#/components/schemas/FailureResponse'

### NIPC management APIs
/devices/{id}/connections:
  post:
    tags:
      - NIPC management APIs
    summary: Connect a device
    description: |-

```

Connect a device. 3 retries by default, optionally retry policy can be defined in the API body. If the protocol requires service discovery, full service discovery will be performed, unless specific services are described in the API body.

operationId: ActionCreateConnection

parameters:

- name: id
 - in: path
 - description: The ID of the device. Group ID is not allowed.
 - required: true
 - schema:
 - type: string
 - format: uuid
 - example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30

requestBody:

content:

application/nipc+json:

schema:

anyOf:

- \$ref: '#/components/schemas/Connection'
- \$ref: './protocolinfo/ProtocolInfo.yaml#/component\

\s/schemas/ProtocolInfo-ServiceMap'

example:

retries: 3

protocolInformation:

ble:

services:

- serviceID: "00001809-0000-1000-8000-00805f9b34\

\fb"

cached: true

cacheExpiryDuration: 3600

required: false

responses:

'200':

description: Success

content:

application/nipc+json:

schema:

allOf:

- \$ref: '#/components/schemas/Id'
- \$ref: './protocolinfo/ProtocolInfo.yaml#/componen\

\nts/schemas/ProtocolInfo-ServiceMap'

example:

id: "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"

protocolInformation:

ble:

services:

```

        - serviceID: "00001809-0000-1000-8000-00805f9b\
\34fb"
        characteristics:
        - characteristicID: "00002a19-0000-1000-80\
\00-00805f9b34fb"
        flags: ["read", "notify"]
        descriptors:
        - descriptorID: "00002902-0000-1000-80\
\00-00805f9b34fb"
        default:
        description: Error response
        content:
        application/problem+json:
        schema:
        $ref: '#/components/schemas/FailureResponse'

put:
  tags:
    - NIPC management APIs
  summary: Update cached ServiceMap for a device.
  description: |-
    Update cached ServiceMap for a device. Full service discovery
    will be performed, unless specific services are described in
    the API body.
  operationId: ActionUpdateServiceMap
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  requestBody:
    content:
      application/nipc+json:
        schema:
          $ref: './protocolinfo/ProtocolInfo.yaml#/components/sc\
\hemas/ProtocolInfo-ServiceMap'
        example:
          retries: 3
          protocolInformation:
            ble:
              services:
                - serviceID: "00001809-0000-1000-8000-00805f9b34\
\fb"

        cached: true

```

```

        cacheExpiryDuration: 3600
    required: false
    responses:
      '200':
        description: Success
        content:
          application/nipc+json:
            schema:
              allOf:
                - $ref: '#/components/schemas/Id'
                - $ref: './protocolinfo/ProtocolInfo.yaml#/compone\
\nts/schemas/ProtocolInfo-ServiceMap'
            example:
              id: "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
              protocolInformation:
                ble:
                  services:
                    - serviceID: "00001809-0000-1000-8000-00805f9b\
\34fb"
                      characteristics:
                        - characteristicID: "00002a19-0000-1000-80\
\00-00805f9b34fb"
                          flags: ["read", "notify"]
                          descriptors:
                            - descriptorID: "00002902-0000-1000-80\
\00-00805f9b34fb"
          default:
            description: Error response
            content:
              application/problem+json:
                schema:
                  $ref: '#/components/schemas/FailureResponse'

  delete:
    tags:
      - NIPC management APIs
    summary: Disconnect a device
    description: |-
      Disconnect a device.
    operationId: ActionDeleteConnection
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid

```

```

        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
responses:
  '200':
    description: Success
    content:
      application/nipc+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/Id'
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC management APIs
  summary: Get connection state for a device
  description: |-
    Get connection status for a device. Success when device(s)
    is/are connected, includes service map for the device if
    available. Failure when a device is not connected
  operationId: ActionGetConnection
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  responses:
    '200':
      description: Success
      content:
        application/nipc+json:
          schema:
            allOf:
              - $ref: '#/components/schemas/Id'
              - $ref: './protocolinfo/ProtocolInfo.yaml#/compone\
\nts/schemas/ProtocolInfo-ServiceMap'
          example:
            id: "1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30"
            protocolInformation:
              ble:

```



```
    services:
      - serviceID: "00001809-0000-1000-8000-00805f9b\
\34fb"
        characteristics:
          - characteristicID: "00002a19-0000-1000-80\
\00-00805f9b34fb"
            flags: ["read", "notify"]
            descriptors:
              - descriptorID: "00002902-0000-1000-80\
\00-00805f9b34fb"
                default:
                  description: Error response
                  content:
                    application/problem+json:
                      schema:
                        $ref: '#/components/schemas/FailureResponse'

### Registrations
/registrations/models:
  post:
    tags:
      - NIPC registration APIs
    summary: Register an sdfObject
    description: |-
      Register an sdfObject, including Properties, Events and
      actions
    operationId: registerSdfObject
    requestBody:
      content:
        application/sdf+json:
          schema:
            $ref: '#/components/schemas/SdfModel'
    required: true
    responses:
      '200':
        description: Success
        content:
          application/nipc+json:
            schema:
              type: array
              items:
                allOf:
                  - $ref: '#/components/schemas/SdfReference'
    default:
      description: Error response
      content:
        application/problem+json:
```

```
      schema:
        allOf:
          - $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC registration APIs
  summary: Get all registered SDF model names
  description: |-
    Get all registered SDF model names.
  operationId: getSdfRefs
  parameters:
    - name: sdfName
      in: query
      description: |-
        sdfName can be a reference to an sdfThing or sdfObject
      required: false
      allowReserved: true
      schema:
        type: string
      example: "https://example.com/heartrate#/sdfObject/health\
\hsensor"
  responses:
    '200':
      description: Success
      content:
        application/sdf+json:
          schema:
            $ref: '#/components/schemas/SdfModel'
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            allOf:
              - $ref: '#/components/schemas/FailureResponse'

put:
  tags:
    - NIPC registration APIs
  summary: Update an SDF model
  description: |-
    Update an SDF model, including Properties, Events and
    actions
  operationId: updateSdf
  parameters:
    - name: sdfName
      in: query
      description: |-
```

```

        sdfName can be a reference to an sdfThing or sdfObject
        required: true
        allowReserved: true
        schema:
            type: string
            example: "https://example.com/hearttrate#/sdfObject/health\
\hsensor"
        requestBody:
            content:
                application/sdf+json:
                    schema:
                        $ref: '#/components/schemas/SdfModel'
            required: true
        responses:
            '200':
                description: Success
                content:
                    application/nipc+json:
                        schema:
                            allOf:
                                - $ref: '#/components/schemas/SdfReference'
            default:
                description: Error response
                content:
                    application/problem+json:
                        schema:
                            allOf:
                                - $ref: '#/components/schemas/FailureResponse'

delete:
    tags:
        - NIPC registration APIs
    summary: Delete an sdfObject
    description: |-
        Delete an sdfObject, including Properties, Events and
        actions
    operationId: deleteSdfObject
    parameters:
        - name: sdfName
          in: query
          description: sdfObject name
          required: true
          schema:
              type: string
              example: "https://example.com/hearttrate#/sdfObject/health\
\hsensor"
    responses:
        '200':

```

```
    description: Success
    content:
      application/nipc+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/SdfReference'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/FailureResponse'

/registrations/data-apps:
  post:
    tags:
      - NIPC registration APIs
    summary: Register a dataApp
    description: |-
      Register a dataApp that is able to receive device data.
    operationId: registerDataApp
    parameters:
      - name: dataAppId
        in: query
        description: id of the data app that will be registered
        required: true
        schema:
          type: string
          format: uuid
          example: 0927ce7c-b258-4bfa-a345-bcc9f74385b4
    requestBody:
      content:
        application/nipc+json:
          schema:
            $ref: '#/components/schemas/DataApp'
      required: true
    responses:
      '200':
        description: Success
        content:
          application/nipc+json:
            schema:
              allOf:
                - $ref: '#/components/schemas/DataApp'
      default:
        description: Error response
        content:
```

```
    application/problem+json:
      schema:
        allOf:
          - $ref: '#/components/schemas/FailureResponse'

put:
  tags:
    - NIPC registration APIs
  summary: Update registration of a dataApp
  description: |-
    Update registration of a dataApp that is able to receive dev\
\ice data.
  operationId: UpdateDataApp
  parameters:
    - name: dataAppId
      in: query
      description: id of the data app that will be updated
      required: true
      schema:
        type: string
        format: uuid
        example: 0927ce7c-b258-4bfa-a345-bcc9f74385b4
  requestBody:
    content:
      application/nipc+json:
        schema:
          $ref: '#/components/schemas/DataApp'
        required: true
  responses:
    '200':
      description: Success
      content:
        application/nipc+json:
          schema:
            allOf:
              - $ref: '#/components/schemas/DataApp'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/FailureResponse'

delete:
  tags:
    - NIPC registration APIs
  summary: Delete registration of a dataApp
```

```
description: |-
  Delete registration of a dataApp that is able to receive
  device data.
operationId: DeleteDataApp
parameters:
  - name: dataAppId
    in: query
    description: id of the data app that will be updated
    required: true
    schema:
      type: string
      format: uuid
      example: 0927ce7c-b258-4bfa-a345-bcc9f74385b4
responses:
  '200':
    description: Success
    content:
      application/nipc+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/DataApp'
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            allOf:
              - $ref: '#/components/schemas/FailureResponse'

get:
  tags:
    - NIPC registration APIs
  summary: Get registration of a dataApp
  description: |-
    Get registrationdetails of a dataApp that is able to receive
    device data.
  operationId: GetDataApp
  parameters:
    - name: dataAppId
      in: query
      description: id of the data app that will be updated
      required: true
      schema:
        type: string
        format: uuid
        example: 0927ce7c-b258-4bfa-a345-bcc9f74385b4
  responses:
```

```
    description: Success
    content:
      application/nipc+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/DataApp'
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          allOf:
            - $ref: '#/components/schemas/FailureResponse'

components:
  schemas:
# Base objects
## A SCIM id, can be a device or a group
  Id:
    required:
      - id
    type: object
    properties:
      id:
        type: string
        format: uuid
        description: |-
          A SCIM-generated UUID, can be a device or group
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30

## A property
  Property:
    required:
      - property
    type: object
    properties:
      property:
        type: string
        example: "https://example.com/heartrate#/sdfObject/thermos\
\tat/sdfProperty/temperature"

## A value
  Value:
    required:
      - value
    type: object
    properties:
      value:
```

```
        type: string
        format: byte
        example: dGVzdA==

## A value of an property of an Device
PropertyValue:
  allof:
    - $ref: '#/components/schemas/Property'
    - $ref: '#/components/schemas/Value'

## An array of Property values
PropertyValueArray:
  type: array
  items:
    $ref: '#/components/schemas/PropertyValue'

## Event
Event:
  required:
    - event
  type: object
  properties:
    event:
      type: string
      description: |-
        percent-encoded JSON pointer to the SDF event object
      example: https://example.com/heartrate#/sdfObject/healthse\
\nsor/sdfEvent/fallDetected

  InstanceId:
    type: object
    properties:
      instanceId:
        type: string
        format: uuid
        description: |-
          A SCIM-generated UUID for the event instance
        example: 02ee282c-8915-4b2e-bbd2-88966773134a

## An Action
Action:
  type: object
  properties:
    action:
      type: string
      description: |-
        NIPC action operation to execute
      example: /devices/3171ec43-42a5-4415-ab4b-afd0dfbe9615/act\
```



```
\ions?actionName=https%3A%2F%2Fexample.com%2FAlarmSystem%23%2FsdObj\
\ect%2Fbell%2FsdAction%2Fring
```

A Connection

```
Connection:
  type: object
  properties:
    retries:
      type: integer
      format: int32
      example: 3
```

DataApp

```
DataApp:
  oneOf:
    - $ref: '#/components/schemas/DataAppMqttClient'
    - $ref: '#/components/schemas/DataAppMqttBroker'
    - $ref: '#/components/schemas/DataAppWebhook'
    - $ref: '#/components/schemas/DataAppWebsocket'
  type: object
  properties:
    events:
      type: array
      items:
        $ref: '#/components/schemas/Event'
```

```
DataAppMqttClient:
  type: object
  properties:
    mqttClient:
      type: boolean
```

```
DataAppMqttBroker:
  type: object
  properties:
    mqttBroker:
      type: object
      required:
        - URI
        - username
        - password
      properties:
        URI:
          type: string
          example: mqtt.broker.com:8883
        username:
          type: string
```

```
    example: user1
  password:
    type: string
    example: password1
  brokerCACert:
    description: PEM encoded CA certificate
    type: string
  customTopic:
    type: string
    description: custom MQTT topic to publish to
    example: custom/topic
```

```
DataAppWebhook:
  type: object
  properties:
    webhook:
      type: object
      properties:
        URI:
          type: string
          example: webhook.com:443
        headers:
          type: object
          additionalProperties:
            type: string
          example:
            x-api-key: fjelk-3dl33f-2wdsd
        serverCACert:
          type: string
```

```
DataAppWebsocket:
  type: object
  properties:
    websocket:
      type: object
      properties:
        URI:
          type: string
          example: websocket.com:443
        headers:
          type: object
          additionalProperties:
            type: string
          example:
            x-api-key: fjelk-3dl33f-2wdsd
        serverCACert:
          type: string
```

```
## sdfObject registration definition
SdfReference:
  type: object
  description: SDF URL referring to the sdfobject
  properties:
    sdfName:
      type: string
      example: "https://example.com/hearttrate#/sdfObject/healths\
\ensor"

SdfModel:
  allof:
    - type: object
      description: Sample SDF model
      properties:
        namespace:
          type: object
          additionalProperties:
            type: string
            example:
              hearttrate: https://example.com/hearttrate
        defaultNamespace:
          type: string
          example: hearttrate
    - oneOf:
      - $ref: '#/components/schemas/SdfThing'
      - $ref: '#/components/schemas/SdfObject'

SdfThing:
  type: object
  description: Sample SDF thing
  properties:
    sdfThing:
      additionalProperties:
        anyOf:
          - $ref: '#/components/schemas/SdfProperty'
          - $ref: '#/components/schemas/SdfEvent'
          - $ref: '#/components/schemas/SdfAction'
          - $ref: '#/components/schemas/SdfObject'
    example:
      multipleSensor:
        sdfEvent:
          isPresent:
            sdfOutputData:
              sdfProtocolMap:
                ble:
                  type: advertisement
      sdfObject:
```

```

        healthsensor:
          sdfProperty:
            heartrate:
              sdfProtocolMap:
                ble:
                  serviceID: 00001809-0000-1000-8000-00805f9\
\b34fb
                  characteristicID: 00002a1c-0000-1000-8000-\
\b00805f9b34fb
          sdfEvent:
            fallDetected:
              sdfOutputData:
                sdfProtocolMap:
                  ble:
                    serviceID: 00001809-0000-1000-8000-00805\
\b9b34fb
                    characteristicID: 00002a1c-0000-1000-800\
\b0-00805f9b34fb
          sdfAction:
            start:
              sdfProtocolMap:
                ble:
                  serviceID: 00001809-0000-1000-8000-00805f9\
\b34fb
                  characteristicID: 00002a1c-0000-1000-8000-\
\b00805f9b34fb

SdfObject:
  type: object
  description: Sample SDF object
  properties:
    sdfObject:
      additionalProperties:
        anyOf:
          - $ref: '#/components/schemas/SdfProperty'
          - $ref: '#/components/schemas/SdfEvent'
          - $ref: '#/components/schemas/SdfAction'
  example:
    healthsensor:
      sdfProperty:
        heartrate:
          sdfProtocolMap:
            ble:
              serviceID: 00001809-0000-1000-8000-00805f9b34fb
              characteristicID: 00002a1c-0000-1000-8000-0080\
\b5f9b34fb
      sdfEvent:
        fallDetected:

```

```

        sdfOutputData:
          sdfProtocolMap:
            ble:
              type: advertisements
      sdfAction:
        start:
          sdfProtocolMap:
            ble:
              serviceID: 00001809-0000-1000-8000-00805f9b34fb
              characteristicID: 00002a1c-0000-1000-8000-0080\
\5f9b34fb

      SdfProperty:
        type: object
        description: Sample SDF property
        properties:
          sdfProperty:
            additionalProperties:
              allOf:
                - $ref: './protocolmaps/ProtocolMap.yaml#/components/s\
\chemas/ProtocolMap'
          example:
            heartrate:
              sdfProtocolMap:
                ble:
                  serviceID: 00001809-0000-1000-8000-00805f9b34fb
                  characteristicID: 00002a1c-0000-1000-8000-00805f9b\
\34fb

      SdfEvent:
        type: object
        description: Sample SDF property
        properties:
          sdfEvent:
            additionalProperties: #example, this will be the registere\
\
          d event
            type: object
            properties:
              sdfOutputData:
                allOf:
                  - $ref: './protocolmaps/ProtocolMap.yaml#/componen\
\ts/schemas/ProtocolMap'
          example:
            fallDetected:
              sdfOutputData:
                sdfProtocolMap:
                  ble:
                    serviceID: 00001809-0000-1000-8000-00805f9b34fb

```

```
characteristicID: 00002a1c-0000-1000-8000-00805f\
\9b34fb

SdfAction:
  type: object
  description: Sample SDF property
  properties:
    sdfAction:
      additionalProperties:
        allOf:
          - $ref: './protocolmaps/ProtocolMap.yaml#/components/s\
\chemas/ProtocolMap'
      example:
        start:
          sdfProtocolMap:
            ble:
              serviceID: 00001809-0000-1000-8000-00805f9b34fb
              characteristicID: 00002a1c-0000-1000-8000-00805f9b\
\34fb

# responses

SuccessResponse:
  type: object
  properties:
    status:
      type: integer
      format: int32
      example: 200
      description: HTTP status code

## Error 500 application Failure response
FailureResponse:
  type: object
  properties:
    type:
      type: string
      description: URI to the error type
      enum:
        - https://www.iana.org/assignments/nipc-problem-types#in\
\valid-id
        - https://www.iana.org/assignments/nipc-problem-types#in\
\valid-sdf-url
        - https://www.iana.org/assignments/nipc-problem-types#ex\
\tension-operation-not-executed
        - https://www.iana.org/assignments/nipc-problem-types#sd\
\f-model-already-registered
        - https://www.iana.org/assignments/nipc-problem-types#sd\
```

```
\f-model-in-use
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\operty-not-readable
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\operty-read-failed
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\operty-not-writable
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\operty-write-failed
  - https://www.iana.org/assignments/nipc-problem-types#ev\
\ent-already-enabled
  - https://www.iana.org/assignments/nipc-problem-types#ev\
\ent-not-enabled
  - https://www.iana.org/assignments/nipc-problem-types#ev\
\ent-not-registered
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-already-connected
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-no-connection
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-connection-timeout
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-bonding-failed
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-connection-failed
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-service-discovery-failed
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-ble-invalid-service-or-characteristic
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-zigbee-connection-timeout
  - https://www.iana.org/assignments/nipc-problem-types#pr\
\otocolmap-zigbee-invalid-endpoint-or-cluster
  - https://www.iana.org/assignments/nipc-problem-types#ex\
\tension-broadcast-invalid-data
  - https://www.iana.org/assignments/nipc-problem-types#ex\
\tension-firmware-rollback
  - https://www.iana.org/assignments/nipc-problem-types#ex\
\tension-firmware-update-failed
  - about:blank
status:
  type: integer
  format: int32
  example: 400
  description: HTTP status code
title:
  type: string
  example: Invalid Device ID
```

```
    description: Human-readable error title
  detail:
    type: string
    example: |-
      Device ID 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30 does not
      exist or is not a device
    description: Human-readable error message
```

Property operations responses

```
PropertyValueResponseArrayItem:
  oneOf:
    - $ref: '#/components/schemas/SuccessResponse'
    - $ref: '#/components/schemas/FailureResponse'

PropertyValueResponseArray:
  type: array
  items:
    $ref: '#/components/schemas/PropertyValueResponseArrayItem'

PropertyValueReadResponseArrayItem:
  oneOf:
    - $ref: '#/components/schemas/PropertyValue'
    - $ref: '#/components/schemas/FailureResponse'

PropertyValueReadResponseArray:
  type: array
  items:
    allof:
      - $ref: '#/components/schemas/PropertyValueReadResponseArr\
\ayItem'
```

Event operations responses

```
EventStatusResponseArrayItem:
  oneOf:
    - allof:
      - $ref: '#/components/schemas/Event'
      - $ref: '#/components/schemas/InstanceId'
    - $ref: '#/components/schemas/FailureResponse'

EventStatusResponseArray:
  type: array
  items:
    $ref: '#/components/schemas/EventStatusResponseArrayItem'

GroupEventStatusResponse:
  type: object
  oneOf:
```



```
- allOf:
  - $ref: '#/components/schemas/Event'
  - type: object
    properties:
      deviceId:
        type: string
        format: uuid
        example: 0dc729d7-f6c3-491d-9b9d-e7176d2be243
  - $ref: '#/components/schemas/FailureResponse'
```

GroupEventStatusResponseArray:

```
  type: array
  items:
    $ref: '#/components/schemas/GroupEventStatusResponse'
```

ActionResponse:

```
  required:
    - action
  type: object
  properties:
    status:
      type: string
      example: COMPLETED
      description: |-
        Status of the action, can be IN_PROGRESS or COMPLETED
```

GroupActiontStatusResponse:

```
  type: object
  oneOf:
    - allOf:
      - $ref: '#/components/schemas/ActionResponse'
      - type: object
        properties:
          deviceId:
            type: string
            format: uuid
            example: 0dc729d7-f6c3-491d-9b9d-e7176d2be243
    - $ref: '#/components/schemas/FailureResponse'
```

GroupActionStatusResponseArray:

```
  type: array
  items:
    $ref: '#/components/schemas/GroupActiontStatusResponse'
```

TriggerResponse:

```
  type: object
  allOf:
    - $ref: '#/components/schemas/InstanceId'
```

```
- $ref: '#/components/schemas/SdfReference'
- $ref: '#/components/schemas/Action'

TriggerStatusResponseArray:
  type: array
  items:
    $ref: '#/components/schemas/TriggerResponse'
<CODE ENDS>
```

Figure 35

Appendix B. Protocol Mapping

The OpenAPI model for SDF protocol mapping is provided in Appendix B of [I-D.ietf-asdf-sdf-protocol-mapping].

Appendix C. Protocol Information

```
<CODE BEGINS> file "ProtocolInfo.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

openapi: 3.0.3
info:
  title: SDF Protocol Information
  description: |-
    SDF Protocol Information. When adding a
    new protocol information schema please add a reference to the pr\
otocol info
    for all the schemas in this file.
  version: 0.10.0
externalDocs:
  description: SDF Protocol Mapping IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-sdf-protocol\
-mapping/

paths: {}

components:
  schemas:
# Protocol Information
## Protocol Info for Service Discovery result
  ProtocolInfo-ServiceMap:
    type: object
    properties:
      protocolInformation:
        oneOf:
          - $ref: './ProtocolInfo-BLE.yaml#/components/schemas/Pro\
tocolInfo-BLE-ServiceMap'
          - $ref: './ProtocolInfo-Zigbee.yaml#/components/schemas/\
ProtocolInfo-Zigbee-ServiceMap'

## Protocol Info for Broadcasts
  ProtocolInfo-Broadcast:
    type: object
    properties:
      protocolInformation:
        oneOf:
          - $ref: './ProtocolInfo-BLE.yaml#/components/schemas/Pro\
tocolInfo-BLE-Broadcast'
          - $ref: './ProtocolInfo-Zigbee.yaml#/components/schemas/\
ProtocolInfo-Zigbee-Broadcast'
<CODE ENDS>
```

C.1. Protocol Information for BLE

```

<CODE BEGINS> file "ProtocolInfo-BLE.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

openapi: 3.0.3
info:
  title: SDF Protocol Information for BLE
  description: |-
    SDF Protocol Information for BLE devices.
  version: 0.10.0
externalDocs:
  description: SDF Protocol Mapping IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-sdf-protocol\
-mapping/

paths: {}

components:
  schemas:
    # BLE Protocol Info
    ## A Service is a device with optional service IDs
    ProtocolInfo-BLE-ServiceMap:
      type: object
      properties:
        ble:
          type: object
          properties:
            services:
              type: array
              items:
                type: object
                allOf:
                  - $ref: '#/components/schemas/ProtocolInfo-BLE-Ser\
vice'
      cached:
        description: |-
          If we can cache information, then device doesn't need
          to be rediscovered before every connected.
        type: boolean
        default: false
      cacheExpiry:
        description: cache expiry period in seconds, when devi\
ce allows
        type: integer
        example: 3600 # default 1 hour
      autoUpdate:
        description: |-
          autoupdate services if device supports it (default)
        type: boolean

```

```
    example: true
    bonding: #optional, by default defined in SCIM object
    type: string
    example: default
    enum:
      - default
      - none
      - justworks
      - passkey
      - oob
```

ProtocolInfo-BLE-Service:

```
  required:
    - serviceID
  type: object
  properties:
    serviceID:
      type: string
      format: uuid
      example: 00001809-0000-1000-8000-00805f9b34fb
    characteristics:
      type: array
      items:
        $ref: '#/components/schemas/ProtocolInfo-BLE-Characteris\
```

tic'

ProtocolInfo-BLE-Characteristic:

```
  type: object
  properties:
    characteristicID:
      type: string
      format: uuid
      example: 00002a1c-0000-1000-8000-00805f9b34fb
    flags:
      type: array
      example:
        - read
        - write
      items:
        type: string
        enum:
          - read
          - write
          - notify
    descriptors:
      type: array
      items:
        $ref: '#/components/schemas/ProtocolInfo-BLE-Descriptor'
```

```
ProtocolInfo-BLE-Descriptor:
  type: object
  properties:
    descriptorID:
      type: string
      format: uuid
      example: 00002902-0000-1000-8000-00805f9b34fb
```

```
## Protocol Info for BLE Broadcast
```

```
ProtocolInfo-BLE-Broadcast:
  required:
    - ble
  type: object
  properties:
    ble:
      type: object
      properties:
        connectable:
          type: boolean
```

```
<CODE ENDS>
```

C.2. Protocol Information for Zigbee

```
<CODE BEGINS> file "ProtocolInfo-Zigbee.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====
```

```
openapi: 3.0.3
```

```
info:
```

```
  title: SDF Protocol Information for Zigbee
  description: |-
    SDF Protocol Information for Zigbee devices.
  version: 0.10.0
```

```
externalDocs:
```

```
  description: SDF Protocol Mapping IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-sdf-protocol\
-mapping/
```

```
paths: {}
```

```
components:
```

```
  schemas:
```

```
  # Zigbee Protocol Information
```

```
  ## Protocol Information for Zigbee Service Map
```

```
    ProtocolInfo-Zigbee-ServiceMap:
```

```
      required:
```

```
        - zigbee
```

```
      type: object
```

```
      properties:
```

```
    zigbee:
      type: object
      properties:
        endpoints:
          type: array
          items:
            $ref: '#/components/schemas/ProtocolInfo-Zigbee-Endpoint'
    oint'
```

```
ProtocolInfo-Zigbee-Endpoint:
  required:
    - endpointID
  type: object
  properties:
    endpointID:
      type: integer
      format: int32
      example: 10
    clusters:
      type: array
      items:
        $ref: '#/components/schemas/ProtocolInfo-Zigbee-Cluster'
```

```
ProtocolInfo-Zigbee-Cluster:
  type: object
  properties:
    clusterID:
      type: integer
      format: int32
      example: 0
    properties:
      type: array
      items:
        $ref: '#/components/schemas/ProtocolInfo-Zigbee-Property'
```

```
ProtocolInfo-Zigbee-Property:
  type: object
  properties:
    attributeID:
      type: integer
      format: int32
      example: 1
    propertyType:
      type: integer
      format: int32
      example: 32
```

Protocol Information for Zigbee broadcast

```
ProtocolInfo-Zigbee-Broadcast:
  required:
  - zigbee
  type: object
  properties:
    zigbee:
      type: object
<CODE ENDS>
```

Appendix D. NIPC API extensions

The following OpenAPI models define a few example extensions to the NIPC API.

D.1. NIPC API write binary blob extension

```
<CODE BEGINS> file "Extension-Blob.yaml"
===== NOTE: '\' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-12/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API write binary blob extension
  description: |-
    Non IP Device Control (NIPC) API write binary blob extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
- url: "{gw_host}/nipc/draft-16"
  variables:
    gw_host:
      default: localhost
      description: Gateway Host
tags:
- name: NIPC API extensions
  description: |-
    APIs that simplify application interaction by implementing
    one or more basic APIs into a single API call.
```



```
paths:
### Extensions
/extensions/{id}/properties/blob:
  put:
    tags:
      - NIPC API extensions
    summary: Write a binary blob to a property on a device
    description: |-
      Write a binary blob to a property on a device. Will chunk up
      the binary blob and perform multiple writes. If the
      underlying protocol requires a connection to be set up,
      this API call will perform the necessary connection
      management. If a connection is already active for this
      device, the existing connection will be leveraged without
      modifying it. ID cannot be a group-id.
    operationId: writeBlob
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: propertyName
        in: query
        description: |-
          The SDF property name that needs to be written to.
        required: true
        schema:
          type: string
          example: "https://example.com/hearttrate#/sdfObject/thermos\
tat/sdfProperty/firmware"
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/Extension-Blob'
      required: true
    responses:
      '204':
        description: Success, no content
      'default':
        description: Error response
        content:
          application/json:
            schema:
```

```

        $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'

components:
  schemas:
# Extensions
## A binary blob Extension
    Extension-Blob:
      required:
        - blob
      type: object
      properties:
        blob:
          type: string
          format: byte
          chunksize:
            type: integer
<CODE ENDS>

```

D.2. NIPC API bulk operations extension

```

<CODE BEGINS> file "Extension-Bulk.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-1\
2/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API bulk extension
  description: |-
    Non IP Device Control (NIPC) API bulk extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:

```

- name: NIPC API extensions
- description: |-
APIs that simplify application interaction by implementing
one or more basic APIs into a single API call.

paths:

Extensions

/extensions/{id}/bulk:

post:

tags:

- NIPC API extensions

summary: Compound operations on a device

description: Compound operations on a device

operationId: Bulk

parameters:

- name: id

in: path

description: The ID of the device. Group ID is not allowed.

required: true

schema:

type: string

format: uuid

example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30

requestBody:

content:

application/json:

schema:

\$ref: "#/components/schemas/Extension-Bulk"

examples:

bulkRequest:

\$ref: "#/components/examples/bulkRequest"

firmwareUpgradeRequest:

\$ref: "#/components/examples/firmwareUpgradeRequest"

required: true

responses:

"202":

description: Accepted

headers:

Location:

schema:

type: string

example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\32e30/bulk/status?instanceId=02ee282c-8915-4b2e-bbd2-88966773134a

description: URL to get the bulk status response

"401":

description: Unauthorized

"405":

description: Invalid request

```

    "500":
      description: Server-side failure
      content:
        application/json:
          schema:
            $ref: "../NIPC.yaml#/components/schemas/FailureRespo\
nse"
  callbacks:
    bulkEvent:
      "{$request.body#/callback.url}":
        post:
          description: Callback for bulk response
          operationId: bulkCallback
          requestBody:
            content:
              application/json:
                schema:
                  allOf:
                    - $ref: "../NIPC.yaml#/components/schemas/Id"
                    - $ref: "#/components/schemas/Extension-Bulk\
Response"
  responses:
    "200":
      description: OK
    "400":
      description: Bad request
    "401":
      description: Unauthorized
    "405":
      description: Invalid request
    "500":
      description: Server-side failure
  get:
    tags:
      - NIPC API extensions
    summary: Get Bulk response
    description: Get Bulk response
    operationId: getBulkResponse
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: instanceId

```

```

    in: query
    description: Instance ID of the bulk operation
    required: true
    schema:
      type: string
      format: uuid
      example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  responses:
    "200":
      description: OK
      headers:
      content:
        application/json:
          schema:
            allOf:
              - $ref: "../NIPC.yaml#/components/schemas/Id"
              - $ref: "#/components/schemas/Extension-BulkRespon\
se"
          examples:
            bulkResponse:
              $ref: "#/components/examples/bulkResponse"
            firmwareUpgradeResponse:
              $ref: "#/components/examples/firmwareUpgradeRespon\
se"
            errorBulkResponse:
              $ref: "#/components/examples/errorBulkResponse"

/extensions/{id}/bulk/status:
  get:
    tags:
      - NIPC API extensions
    summary: Get Bulk status
    description: Get Bulk status
    operationId: getBulkStatus
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: instanceId
        in: query
        description: Instance ID of the bulk operation
        required: true
        schema:

```

```
    type: string
    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  responses:
    "200":
      description: OK
      headers:
      content:
        application/json:
          schema:
            allOf:
              - $ref: "../Extension-Async.yaml#/components/schema\
s/Extension-StatusResponse"
    "303":
      description: See Other
      headers:
        Location:
          schema:
            type: string
            example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
32e30/bulk?instanceId=02ee282c-8915-4b2e-bbd2-88966773134a
      description: URL to get the bulk response
      content:
        application/json:
          schema:
            allOf:
              - $ref: "../Extension-Async.yaml#/components/schema\
s/Extension-StatusResponse"
      examples:
        successExample:
          summary: Success
          value:
            status: COMPLETED

  components:
    schemas:
      # Extensions
      ## Bulk schema Extension
      Extension-Bulk:
        allOf:
          - $ref: "../Extension-Async.yaml#/components/schemas/Extensio\
n-Callback"
          - type: object
            properties:
              operations:
                type: array
                items:
                  $ref: "../components/schemas/Extension-BulkOperation"
```

```

    trigger:
      type: string
      description: |-
        When to trigger the operations. If not specified, the
        operations are triggered immediately.
      default: immediate
      enum:
        - immediate
        - advertisement

## Extension that defines an operation in a bulk API
Extension-BulkOperation:
  required:
    - method
    - path
  allOf:
    - type: object
      properties:
        method:
          type: string
          enum:
            - POST
            - PUT
            - GET
        path:
          type: string
          enum:
            - /devices/{id}/properties?propertyName={propertyName}
            - /devices/{id}/actions/?actionName={actionName}
            - /extensions/{id}/properties/read/conditional?propertyName={propertyName}
            - /extensions/{id}/events/conditional?eventName={eventName}
            - /extensions/{id}/properties/file?propertyName={propertyName}
          example: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30\
            /properties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2F\
            2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature
        data:
          type: object
          oneOf:
            - $ref: "../NIPC.yaml#/components/schemas/Value"
            - $ref: "../Extension-ReadConditional.yaml#/components/schemas/Extension-ConditionalRead"

## Multiple returns for a bulk operation
Extension-BulkResponse:

```

```

    type: object
    properties:
      operations:
        type: array
        items:
          $ref: "#/components/schemas/Extension-OperationResponse"

## Return for an operation
Extension-OperationResponse:
  allOf:
    - type: object
      properties:
        method:
          type: string
          enum:
            - POST
            - PUT
            - GET
        path:
          type: string
          enum:
            - /devices/{id}/properties?propertyName={propertyName}
            - /devices/{id}/actions/?actionName={actionName}
            - /extensions/{id}/properties/read/conditional?propertyName={propertyName}
            - /extensions/{id}/events/conditional?eventName={eventName}
      example: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/properties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature
      response:
        anyOf:
          - $ref: "../NIPC.yaml#/components/schemas/Value"
          - $ref: "../NIPC.yaml#/components/schemas/SuccessResponse"
          - $ref: "../NIPC.yaml#/components/schemas/FailureResponse"

    examples:
      bulkRequest:
        summary: Bulk request example
        value:
          operations:
            - method: GET
              path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/properties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature

```



```
- method: PUT
  path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2Ftemperature
  data:
    value: dGVzdA==
- method: POST
  path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/read/conditional?propertyName=https%3A%2F%2Fexample.com%2F\
thermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature
  data:
    value: dGVzdA==
    maxRepeat: 5
    retryTime: 1
bulkResponse:
  summary: Bulk response example
  value:
    operations:
      - method: GET
        path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2Ftemperature
        response:
          value: dGVzdA==
      - method: PUT
        path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2Ftemperature
        response:
          status: 200
      - method: POST
        path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/read/conditional?propertyName=https%3A%2F%2Fexample.com%2F\
thermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature
        response:
          value: dGVzdA==
errorBulkResponse:
  summary: Error Bulk response example
  value:
    operations:
      - method: GET
        path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2Ftemperature
        response:
          type: https://www.iana.org/assignments/nipc-problem-ty\
pes#property-not-readable
          status: 400
```

```
    title: Property not readable
    detail: Property https://example.com/thermometer#/sdfT\
hing/thermometer/sdfProperty/temperature is not readable
  - method: PUT
    path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2Ftemperature
    response:
      type: https://www.iana.org/assignments/nipc-problem-ty\
pes#extension-operation-not-executed
      status: 400
      title: Operation not executed
      detail: Operation was not executed since the previous \
operation failed
  - method: POST
    path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/read/conditional?propertyName=https%3A%2F%2Fexample.com%2F\
thermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ftemperature
    response:
      type: https://www.iana.org/assignments/nipc-problem-ty\
pes#extension-operation-not-executed
      status: 400
      title: Operation not executed
      detail: Operation was not executed since the previous \
operation failed
  firmwareUpgradeRequest:
    summary: Firmware upgrade request example
    value:
      operations:
        - method: PUT
          path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2FstartOTA
          data:
            value: dGVzdA==
        - method: POST
          path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/e\
vents/conditional?eventName=https%3A%2F%2Fexample.com%2Fthermometer%\
23%2FsdfThing%2Fthermometer%2FsdfEvent%2FotaStarted
          data:
            value: MQ==
            timeout: 5
        - method: PUT
          path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/file?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%\
23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ffirmware
          data:
            fileURL: https://example.com/firmware.bin
```

```
        chunkSize: 20
        sha256Checksum: abcdef1234567890abcdef1234567890abcdef\
1234567890abcdef1234567890
    - method: PUT
      path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2FfinishOTA
      data:
        value: dGVzdA==
    - method: POST
      path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/read/conditional?propertyName=https%3A%2F%2Fexample.com%2F\
thermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2FupdateStatus
      data:
        value: MQ==
        maxRepeat: 5
        retryTime: 1
    - method: PUT
      path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2FactivateOTA
      data:
        value: dGVzdA==
  firmwareUpgradeResponse:
    summary: Firmware upgrade response example
    value:
      operations:
        - method: PUT
          path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2FstartOTA
          response:
            status: 200
        - method: POST
          path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/e\
vents/conditional?eventName=https%3A%2F%2Fexample.com%2Fthermometer%\
23%2FsdfThing%2Fthermometer%2FsdfEvent%2FotaStarted
          response:
            value: MQ==
        - method: PUT
          path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
roperties/file?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%\
23%2FsdfThing%2Fthermometer%2FsdfProperty%2Ffirmware
          response:
            status: 204
        - method: PUT
          path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
```

```

Thing%2Fthermometer%2FsdfProperty%2FfinishOTA
  response:
    status: 200
  - method: POST
    path: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/p\
properties/read/conditional?propertyName=https%3A%2F%2Fexample.com%2F\
thermometer%23%2FsdfThing%2Fthermometer%2FsdfProperty%2FupdateStatus
  response:
    value: MQ==
  - method: PUT
    path: /devices/1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30/prop\
erties?propertyName=https%3A%2F%2Fexample.com%2Fthermometer%23%2Fsdf\
Thing%2Fthermometer%2FsdfProperty%2FactivateOTA
  data:
    status: 200
<CODE ENDS>

```

D.3. NIPC API write file extension

```

<CODE BEGINS> file "Extension-File.yaml"
===== NOTE: '\n' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-1\
\2/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API write file extension
  description: |-
    Non IP Device Control (NIPC) API write file extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:
  - name: NIPC API extensions
    description: |-

```

APIs that simplify application interaction by implementing one or more basic APIs into a single API call.

paths:

Extensions

/extensions/{id}/properties/file:

put:

tags:

- NIPC API extensions

summary: Write a file to a property on a device

description: |-

Write a file to a property on a device. Will chunk up the file and perform multiple writes. If the underlying protocol requires a connection to be set up, this API call will perform the necessary connection management. If a connection is already active for this device, the existing connection will be leveraged without modifying it. ID cannot be a group-id.

operationId: writeFile

parameters:

- name: id

in: path

description: The ID of the device. Group ID is not allowed.

required: true

schema:

type: string

format: uuid

example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30

- name: propertyName

in: query

description: |-

The SDF property name that needs to be written to.

required: true

schema:

type: string

example: "https://example.com/heartrate#/sdfObject/thermos\

\tat/sdfProperty/firmware"

requestBody:

content:

application/json:

schema:

allOf:

- \$ref: '#/components/schemas/Extension-File'

- \$ref: './Extension-Async.yaml#/components/schemas/\

\Extension-Callback'

required: true

responses:

'202':

```

    description: Accepted
    headers:
      Location:
        schema:
          type: string
          example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
\32e30/properties/file/status?propertyName=https%3A%2F%2Fexample.com\
\%2Fheartrate%23%2FsdfObject%2Fthermostat%2FsdfProperty%2Ffirmware&i\
\nstanceId=02ee282c-8915-4b2e-bbd2-88966773134a
        description: |-
          URL to get the file write status
      Retry-After:
        schema:
          type: integer
        description: |-
          Time in seconds to wait before retrying
    'default':
      description: Error response
      content:
        application/json:
          schema:
            $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
\nse'
    callbacks:
      callbackEvent:
        "{$request.body#/callback.url}":
          post:
            requestBody:
              content:
                application/json:
                  schema:
                    anyOf:
                      - allOf:
                        - $ref: '../NIPC.yaml#/components/schemas/\
\Id'
                        - $ref: '../NIPC.yaml#/components/schemas/\
\PropertyValue'
                      - $ref: '../NIPC.yaml#/components/schemas/Fa\
\ilureResponse'
            examples:
              successExample:
                summary: Success
                value:
                  id: 02ee282c-8915-4b2e-bbd2-88966773134a
                  property: https://example.com/heartrate#/s\
\dfObject/thermostat/sdfProperty/firmware
              failedResponse:
                summary: Failed

```

```
      value:
        id: 02ee282c-8915-4b2e-bbd2-88966773134a
        status: 400
        type: https://www.iana.org/assignments/nip\
\c-problem-types#invalid-id
        title: Invalid ID
        detail: "Invalid request"
        property: https://example.com/heartrate#/s\
\dfObject/thermostat/sdfProperty/firmware
      responses:
        '200':
          description: Success
get:
  tags:
    - NIPC API extensions
  summary: Get the status of a file write operation
  description: |-
    Get the status of a file write operation. This will return
    the status of the file write operation, including any errors
    that may have occurred.
  operationId: getFileWriteStatus
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: propertyName
      in: query
      description: |-
        The SDF property name that needs to be written to.
      required: true
      schema:
        type: string
        example: "https://example.com/heartrate#/sdfObject/thermos\
\tat/sdfProperty/firmware"
    - name: instanceId
      in: query
      description: |-
        The Instance ID for the file write operation.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
```

```

    responses:
      '204':
        description: Success, no content
      default:
        description: Error response
        content:
          application/json:
            schema:
              $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
\nse'
  /extensions/{id}/properties/file/status:
    get:
      tags:
        - NIPC API extensions
      summary: Get the status of a file write operation
      description: |-
        Get the status of a file write operation. This will return
        the status of the file write operation, including any errors
        that may have occurred.
      operationId: getFileWriteStatus
      parameters:
        - name: id
          in: path
          description: The ID of the device. Group ID is not allowed.
          required: true
          schema:
            type: string
            format: uuid
            example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
        - name: propertyName
          in: query
          description: |-
            The SDF property name that needs to be written to.
          required: true
          schema:
            type: string
            example: "https://example.com/heartrate#/sdfObject/thermos\
\tat/sdfProperty/firmware"
        - name: instanceId
          in: query
          description: |-
            The Instance ID for the file write operation.
          required: true
          schema:
            type: string
            format: uuid
            example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    responses:

```



```

    '200':
      description: Success, returns the status of the file write\
\ operation.
      content:
        application/json:
          schema:
            $ref: './Extension-Async.yaml#/components/schemas/Ex\
\tension-StatusResponse'
    '303':
      description: See Other
      headers:
        Location:
          schema:
            type: string
            example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
\32e30/properties/file?propertyName=https%3A%2F%2Fexample.com%2Fhear\
\trate%23%2FsdfObject%2Fthermostat%2FsdfProperty%2Ffirmware&instance\
\Id=02ee282c-8915-4b2e-bbd2-88966773134a
      description: URL to get the file write response
      content:
        application/json:
          schema:
            $ref: './Extension-Async.yaml#/components/schemas/Ex\
\tension-StatusResponse'
          examples:
            successExample:
              summary: Completed
              value:
                id: 02ee282c-8915-4b2e-bbd2-88966773134a
                status: COMPLETED

components:
  schemas:
# Extensions
## A File Extension
  Extension-File:
    required:
      - fileURL
    type: object
    properties:
      fileURL:
        type: string
        example: "https://domain.com/firmware.dat"
        description: |-
          URL to the firmware file.
          The HTTP method is assumed to be a GET.
    chunkSize:
      type: integer

```

```
    sha256Checksum:
      type: string
      description: firmware checksum
    headers:
      type: object
      additionalProperties:
        type: string
      example:
        x-api-key: fjelk-3dl33f-2wdsd
<CODE ENDS>
```

D.4. NIPC API conditional read extension

```
<CODE BEGINS> file "Extension-ReadConditional.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-12/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API read conditional extension
  description: |-
    Non IP Device Control (NIPC) API read conditional extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:
  - name: NIPC API extensions
    description: |-
      APIs that simplify application interaction by implementing
      one or more basic APIs into a single API call.

paths:
  ### Extensions
  /extensions/{id}/properties/read/conditional:
```

```
post:
  tags:
    - NIPC API extensions
  summary: Conditional read of a property
  description: Conditional read of a property
  operationId: conditionalRead
  parameters:
    - name: id
      in: path
      description: The ID of the device. Group ID is not allowed.
      required: true
      schema:
        type: string
        format: uuid
        example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    - name: propertyName
      in: query
      description: |-
        The SDF property name that needs to be read conditionally.
      required: true
      allowReserved: true
      schema:
        type: string
        example: "#/sdfObject/thermostat/sdfProperty/temperature"
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/Extension-ConditionalRead'
        required: true
  responses:
    '202':
      description: Accepted
      headers:
        Location:
          schema:
            type: string
            example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
32e30/properties/read/conditional/status?propertyName=https%3A%2F%2F\
example.com%2Fheartrate%23%2FsdfObject%2Fthermostat%2FsdfProperty%2F\
temperature&instanceId=02ee282c-8915-4b2e-bbd2-88966773134a
      description: |-
        URL to get the conditional read status
      Retry-After:
        schema:
          type: integer
        description: |-
          Time in seconds to wait before retrying
```

```

      'default':
        description: Error response
        content:
          application/json:
            schema:
              $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'
      callbacks:
        callbackEvent:
          "{$request.body#/callback.url}":
            post:
              requestBody:
                content:
                  application/json:
                    schema:
                      anyOf:
                        - allOf:
                            - $ref: '../NIPC.yaml#/components/schemas/\
Id'
                            - $ref: '../NIPC.yaml#/components/schemas/\
PropertyValue'
                        - $ref: '../NIPC.yaml#/components/schemas/Fa\
ilureResponse'
              examples:
                successExample:
                  summary: Success
                  value:
                    id: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
                    property: https://example.com/hearttrate#/s\
dfObject/thermostat/sdfProperty/temperature
                    value: dGVzdA==
                failedResponse:
                  summary: Failed
                  value:
                    id: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
                    status: 400
                    type: https://www.iana.org/assignments/nip\
c-problem-types#invalid-id
                    title: Invalid ID
                    detail: "Invalid request"
                    property: https://example.com/hearttrate#/s\
dfObject/thermostat/sdfProperty/temperature
                    value: dGVzdA==
              responses:
                '200':
                  description: Success
      get:

```

```
tags:
  - NIPC API extensions
summary: Get Conditional read response of a property
description: Conditional read response of a property
operationId: getConditionalRead
parameters:
- name: id
  in: path
  description: The ID of the device. Group ID is not allowed.
  required: true
  schema:
    type: string
    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
- name: propertyName
  in: query
  description: |-
    The SDF property name that needs to be read conditionally.
  required: true
  allowReserved: true
  schema:
    type: string
    example: "#/sdfObject/thermostat/sdfProperty/temperature"
- name: instanceId
  in: query
  description: |-
    Instance ID of the conditional read operation
  required: true
  schema:
    type: string
    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
responses:
  '200':
    description: Success
    headers:
    content:
      application/json:
        schema:
          allOf:
            - $ref: '../NIPC.yaml#/components/schemas/Value'
      application/octet-stream:
        schema:
          type: string
          format: binary
          description: Binary data of the property value
    default:
      description: Error response
```

```
      content:
        application/problem+json:
          schema:
            allOf:
              - $ref: '../NIPC.yaml#/components/schemas/FailureR\
response'
  /extensions/{id}/properties/read/conditional/status:
    get:
      tags:
        - NIPC API extensions
      summary: Get Conditional read status of a property
      description: Conditional read status of a property
      operationId: getConditionalReadStatus
      parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
      - name: propertyName
        in: query
        description: |-
          The SDF property name that needs to be read conditionally.
        required: true
        allowReserved: true
        schema:
          type: string
          example: "#/sdfObject/thermostat/sdfProperty/temperature"
      - name: instanceId
        in: query
        description: Instance ID of the conditional read operation
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    responses:
      '200':
        description: OK
        headers:
        content:
          application/json:
            schema:
              $ref: '../Extension-Async.yaml#/components/schemas/Ex\
tension-StatusResponse'
```

```

    '303':
      description: See Other
      headers:
        Location:
          schema:
            type: string
            example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
32e30/properties/read/conditional?propertyName=https%3A%2F%2Fexample\
.com%2Fheartrate%23%2FsdfObject%2Fthermostat%2FsdfProperty%2Ftempera\
ture&instanceId=02ee282c-8915-4b2e-bbd2-88966773134a
            description: URL to get the conditional read response
      content:
        application/json:
          schema:
            $ref: './Extension-Async.yaml#/components/schemas/Ex\
tension-StatusResponse'
          examples:
            successExample:
              summary: Completed
              value:
                id: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
                status: COMPLETED

components:
  schemas:
# Extensions
    Extension-ConditionalRead:
      allOf:
        - $ref: './NIPC.yaml#/components/schemas/Value'
        - $ref: './Extension-Async.yaml#/components/schemas/Extensio\
n-Callback'
        - type: object
          properties:
            maxRepeat:
              description: |-
                maximum time the conditional read should repeat
                (default 5, max 10)
              type: integer
              example: 5
            retryTime:
              description: |-
                time between reads in seconds (default 1, max 10)
              type: integer
              example: 1
<CODE ENDS>

```

D.5. NIPC API conditional event extension

```
<CODE BEGINS> file "Extension-EventConditional.yaml"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-12/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API event conditional extension
  description: |-
    Non IP Device Control (NIPC) API event conditional extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0
externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:
  - name: NIPC API extensions
    description: |-
      APIs that simplify application interaction by implementing
      one or more basic APIs into a single API call.

paths:
  ### Extensions
  /extensions/{id}/events/conditional:
    post:
      tags:
        - NIPC API extensions
      summary: Enable an event until a condition is met
      description: Enable an event until a condition is met
      operationId: conditionalEvent
      parameters:
        - name: id
          in: path
          description: The ID of the device. Group ID is not allowed.
          required: true
          schema:
            type: string
```



```

    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  - name: eventName
    in: query
    description: |-
      The SDF event name that needs to be enabled.
    required: true
    allowReserved: true
    schema:
      type: string
      example: "#/sdfObject/thermostat/sdfEvent/temperature"
  requestBody:
    content:
      application/json:
        schema:
          $ref: '#/components/schemas/Extension-ConditionalEvent'
        required: true
  responses:
    '202':
      description: Accepted
      headers:
        Location:
          schema:
            type: string
            example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
32e30/events/conditional/status?eventName=https%3A%2F%2Fexample.com%\
2Fheartrate%23%2FsdfObject%2Fthermostat%2FsdfEvent%2Ftemperature&ins\
tanceId=02ee282c-8915-4b2e-bbd2-88966773134a
      description: |-
        URL to get the conditional event status
      Retry-After:
        schema:
          type: integer
        description: |-
          Time in seconds to wait before retrying
    'default':
      description: Error response
      content:
        application/json:
          schema:
            $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'
  callbacks:
    callbackEvent:
      "{$request.body#/callback.url}":
        post:
          requestBody:
            content:

```

```

    application/json:
      schema:
        anyOf:
          - allOf:
              - $ref: '../NIPC.yaml#/components/schemas/\
Id'
              - $ref: '../NIPC.yaml#/components/schemas/\
PropertyValue'
          - $ref: '../NIPC.yaml#/components/schemas/Fa\
ilureResponse'
      examples:
        successExample:
          summary: Success
          value:
            id: 02ee282c-8915-4b2e-bbd2-88966773134a
            event: https://example.com/hearttrate#/sdfO\
bject/thermostat/sdfEvent/temperature
            value: dGVzdA==
        failedResponse:
          summary: Failed
          value:
            id: 02ee282c-8915-4b2e-bbd2-88966773134a
            status: 400
            type: https://www.iana.org/assignments/nip\
c-problem-types#invalid-id
            title: Invalid ID
            detail: "Invalid request"
            event: https://example.com/hearttrate#/sdfO\
bject/thermostat/sdfEvent/temperature
            value: dGVzdA==

    responses:
      '200':
        description: Success

  get:
    tags:
      - NIPC API extensions
    summary: Get Conditional event response
    description: Conditional event response
    operationId: getConditionalEvent
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid

```

```

    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
  - name: eventName
    in: query
    description: |-
      The name of the SDF event that is enabled.
    required: true
    allowReserved: true
    schema:
      type: string
      example: "#/sdfObject/thermostat/sdfEvent/temperature"
  - name: instanceId
    in: query
    description: |-
      Instance ID of the conditional event operation
    required: true
    schema:
      type: string
      format: uuid
      example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
responses:
  '200':
    description: Success
    headers:
    content:
      application/json:
        schema:
          allOf:
            - $ref: '../NIPC.yaml#/components/schemas/Value'
      application/octet-stream:
        schema:
          type: string
          format: binary
        description: Binary data of the event value
  default:
    description: Error response
    content:
      application/problem+json:
        schema:
          allOf:
            - $ref: '../NIPC.yaml#/components/schemas/FailureR\
esponse'
/extensions/{id}/events/conditional/status:
  get:
    tags:
      - NIPC API extensions
    summary: Get Conditional event status
    description: Conditional event status
    operationId: getConditionalEventStatus

```

```

parameters:
- name: id
  in: path
  description: The ID of the device. Group ID is not allowed.
  required: true
  schema:
    type: string
    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
- name: eventName
  in: query
  description: |-
    The name of the SDF event that is enabled.
  required: true
  allowReserved: true
  schema:
    type: string
    example: "#/sdfObject/thermostat/sdfEvent/temperature"
- name: instanceId
  in: query
  description: Instance ID of the conditional event operation
  required: true
  schema:
    type: string
    format: uuid
    example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
responses:
  '200':
    description: OK
    headers:
    content:
      application/json:
        schema:
          $ref: './Extension-Async.yaml#/components/schemas/Ex\
tension-StatusResponse'
  '303':
    description: See Other
    headers:
      Location:
        schema:
          type: string
          example: /extensions/1d3b2c36-8a65-45a6-87c1-bcdbe0a\
32e30/events/conditional?eventName=https%3A%2F%2Fexample.com%2Fheart\
rate%23%2Fsdfobject%2Fthermostat%2FsdfEvent%2Ftemperature&instanceId\
=02ee282c-8915-4b2e-bbd2-88966773134a
    description: URL to get the conditional event response
    content:
      application/json:

```

```

      schema:
        $ref: './Extension-Async.yaml#/components/schemas/Extension-StatusResponse'
      examples:
        successExample:
          summary: Completed
          value:
            id: 02ee282c-8915-4b2e-bbd2-88966773134a
            status: COMPLETED

components:
  schemas:
# Extensions
    Extension-ConditionalEvent:
      allOf:
        - $ref: './Extension-Async.yaml#/components/schemas/Extension-Callback'
        - $ref: './NIPC.yaml#/components/schemas/Value'
        - type: object
          properties:
            timeout:
              description: |-
                Time in seconds to keep the event enabled.
                If the event condition is not met within this time,
                the event will be disabled and marked as failed.
              type: integer
              example: 5
<CODE ENDS>

```

D.6. NIPC API property extensions

```

<CODE BEGINS> file "Extension-Property.yaml"
===== NOTE: '\' line wrapping per RFC 8792 =====

# yaml-language-server: $schema=https://json-schema.org/draft/2020-12/schema
openapi: 3.0.3
info:
  title: Non IP Device Control (NIPC) API properties extension
  description: |-
    Non IP Device Control (NIPC) API properties extension
  termsOfService: http://swagger.io/terms/
  contact:
    email: bbrinckm@cisco.com
  license:
    name: TBD
    url: TBD
  version: 0.16.0

```

```

externalDocs:
  description: NIPC IETF draft
  url: https://datatracker.ietf.org/doc/draft-ietf-asdf-nipc/
servers:
  - url: "{gw_host}/nipc/draft-16"
    variables:
      gw_host:
        default: localhost
        description: Gateway Host
tags:
  - name: NIPC API extensions
    description: |-
      APIs that simplify application interaction by implementing
      one or more basic APIs into a single API call.

paths:
### Extensions
/extensions/{id}/transmit:
  post:
    tags:
      - NIPC API extensions
    summary: Transmit to a device
    description: |-
      Transmit a payload to a device. The transmission is performed
      on the AP where the device was last seen
    operationId: ActionTransmit
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    requestBody:
      content:
        application/json:
          schema:
            $ref: '#/components/schemas/Transmit'
          required: true
    responses:
      '200':
        description: Success
      default:
        description: Error response
        content:
          application/problem+json:

```

```

        schema:
          $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'

/extensions/{id}/properties/write:
  post:
    tags:
      - NIPC API extensions
    summary: Write a value to an property using protocol mapping
    description: |-
      Write a value to an unregistered property, embedding property
      protocol mapping in the API, this does not require
      property registration. You cannot write to a group id.
    operationId: ActionPropWrite
    parameters:
      - name: id
        in: path
        description: The ID of the device. Group ID is not allowed.
        required: true
        schema:
          type: string
          format: uuid
          example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
    requestBody:
      content:
        application/json:
          schema:
            allOf:
              - $ref: '../NIPC.yaml#/components/schemas/Value'
              - $ref: '../protocolmaps/ProtocolMap.yaml#/component\
s/schemas/ProtocolMap-Property'
            required: true
    responses:
      '204':
        description: Success, no content
      default:
        description: Error response
        content:
          application/problem+json:
            schema:
              $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'

/extensions/{id}/properties/read:
  post:
    tags:
      - NIPC API extensions
    summary: Read a value to an property using protocol mapping

```

```

description: |-
  Read a value from an unregistered property, embedding
  property protocol mapping in the API, this does not require
  property registration. You cannot read from a group id.
operationId: ActionPropRead
parameters:
  - name: id
    in: path
    description: The ID of the device. Group ID is not allowed.
    required: true
    schema:
      type: string
      format: uuid
      example: 1d3b2c36-8a65-45a6-87c1-bcdbe0a32e30
requestBody:
  content:
    application/json:
      schema:
        $ref: '../protocolmaps/ProtocolMap.yaml#/components/sc\
hemas/ProtocolMap-Property'
    required: true
  responses:
    '200':
      description: Success
      content:
        application/json:
          schema:
            allOf:
              - $ref: '../NIPC.yaml#/components/schemas/Value'
    default:
      description: Error response
      content:
        application/problem+json:
          schema:
            $ref: '../NIPC.yaml#/components/schemas/FailureRespo\
nse'

components:
  schemas:
    Transmit:
      allOf:
        - $ref: '../protocolinfo/ProtocolInfo.yaml#/components/schem\
as/ProtocolInfo-Broadcast'
      required:
        - cycle
      type: object
      properties:
        cycle:

```



```

    type: string
    example: single
    enum:
      - single
      - repeat
# transmit time in ms
transmitTime:
  type: integer
  example: 3000
# interval between transmits in ms
transmitInterval:
  type: integer
  example: 500
payload:
  type: string
  format: byte
  example: AgEaAgoMFv9MABAHch9BsDkgeA==
<CODE ENDS>

```

Appendix E. NIPC API CDDL Definition

The following is a combined reference of all NIPC API CDDL definitions used in this document.

```

<CODE BEGINS> file "combined.cddl"
===== NOTE: '\ ' line wrapping per RFC 8792 =====

; This file is auto-generated from individual NIPC API CDDL files

; =====
; From: cddl/api/action_response.cddl
; =====
ActionResponse = {
  status: ActionStatus
}

ActionStatus = (
  "IN_PROGRESS" /
  "COMPLETED"
)
; =====
; From: cddl/api/action.cddl
; =====
Action = {
  ? action: text ; NIPC action operation to execute
}

; =====

```

```
; From: cddl/api/data_app.cddl
; =====
DataApp = {
  events: [* EventRef],
  ( DataAppMqttClient //
    DataAppMqttBroker //
    DataAppWebhook //
    DataAppWebsocket )
}

EventRef = {
  event: text      ; SDF global name (absolute URI with fragment)
}

DataAppMqttClient = {
  mqttClient: bool
}

DataAppMqttBroker = {
  mqttBroker: {
    URI: text,
    username: text,
    password: text,
    ? brokerCACert: text,    ; PEM-encoded CA certificate
    ? customTopic: text     ; optional custom MQTT topic
  }
}

DataAppWebhook = {
  webhook: {
    URI: text,
    ? headers: { * text => text }, ; key/value headers
    ? serverCACert: text
  }
}

DataAppWebsocket = {
  websocket: {
    URI: text,
    ? headers: { * text => text }, ; key/value headers
    ? serverCACert: text
  }
}
; =====
; From: cddl/api/event_status_array.cddl
; =====
EventStatusResponseArray = [* EventStatusResponseArrayItem]
```

```
EventStatusResponseArrayItem = ( EventInstanceSuccess // FailureResp\
onse )

; Success item = { event, instanceId }
EventInstanceSuccess = {
    event: text,          ; SDF global name of the event (absolute URI w\
ith fragment)
    instanceId: text      ; UUID (as text)
}

; =====
; From: cddl/api/failure_response.cddl
; =====
FailureResponse = {
    ? type: FailureTypeURI,
    ? status: uint,
    ? title: text,
    ? detail: text
}

; Enumerated problem type URIs registered for NIPC
FailureTypeURI = (
    "https://www.iana.org/assignments/nipc-problem-types#invalid-id" /
    "https://www.iana.org/assignments/nipc-problem-types#invalid-sdf-u\
rl" /
    "https://www.iana.org/assignments/nipc-problem-types#extension-ope\
ration-not-executed" /
    "https://www.iana.org/assignments/nipc-problem-types#sdf-model-alr\
eady-registered" /
    "https://www.iana.org/assignments/nipc-problem-types#sdf-model-in-\
use" /
    "https://www.iana.org/assignments/nipc-problem-types#property-not-\
readable" /
    "https://www.iana.org/assignments/nipc-problem-types#property-read\
-failed" /
    "https://www.iana.org/assignments/nipc-problem-types#property-not-\
writable" /
    "https://www.iana.org/assignments/nipc-problem-types#property-writ\
e-failed" /
    "https://www.iana.org/assignments/nipc-problem-types#event-already\
-enabled" /
    "https://www.iana.org/assignments/nipc-problem-types#event-not-ena\
bled" /
    "https://www.iana.org/assignments/nipc-problem-types#event-not-reg\
istered" /
    "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-already-connected" /
    "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
```

```

le-no-connection" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-connection-timeout" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-bonding-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-connection-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-service-discovery-failed" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-b\
le-invalid-service-or-characteristic" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-z\
igbee-connection-timeout" /
  "https://www.iana.org/assignments/nipc-problem-types#protocolmap-z\
igbee-invalid-endpoint-or-cluster" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-bro\
adcast-invalid-data" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-fir\
mware-rollback" /
  "https://www.iana.org/assignments/nipc-problem-types#extension-fir\
mware-update-failed" /
  "about:blank"
)
; =====
; From: cddl/api/group_event_status_response_array.cddl
; =====
GroupEventStatusResponseArray = [* GroupEventStatusResponse]

GroupEventSuccessResponse = { event: text, deviceId: text }

; Each item is either an event+deviceId success or a FailureResponse
GroupEventStatusResponse = (GroupEventSuccessResponse // FailureResp\
onse)

; FailureResponse (Problem Details subset; align with your existing \
definition if present)
GroupFailureResponse = {
  FailureResponse,
  ? deviceId: text
}
; =====
; From: cddl/api/trigger_status_array.cddl
; =====
; Trigger status response array and item shape

TriggerStatusResponseArray = [* TriggerResponse]

TriggerResponse = {

```

```

    SdfReference,
    ? action: text,          ; NIPC action operation to execute
    instanceId: text        ; UUID (as text)
}

; =====
; From: cddl/api/property_value_array.cddl
; =====
PropertyValueArray = [* PropertyValue]

; Minimal PropertyValue shape (matches allOf of Property + Value)
PropertyValue = {
    property: text,          ; SDF global name of the property
    value: b64text          ; base64-encoded bytes (RFC 4648 Section 5)
}

; Helper type for base64-with-padding encoded text
b64text = text

; =====
; From: cddl/api/property_value_read_response_array.cddl
; =====
PropertyValueReadResponseArray = [* PropertyValueReadResponseArrayItem]

PropertyValueReadResponseArrayItem = ( PropertyValue // FailureResponse )

; =====
; From: cddl/api/property_value_response_array.cddl
; =====
PropertyValueResponseArray = [* PropertyValueResponseArrayItem]

PropertyValueResponseArrayItem = ( SuccessResponse // FailureResponse )

; Minimal success shape (may be extended)
SuccessResponse = {
    ? status: uint
}

; =====
; From: cddl/api/sdf_reference.cddl
; =====
SdfGlobalName = text      ; absolute URI with fragment referencing an \
sdfThing or sdfObject

SdfReference = {
    sdfName: SdfGlobalName

```

```
}

SdfReferenceArray = [* SdfReference]
; =====
; From: cddl/api/connection.cddl
; =====
ConnectionRequest = {
    ? retries: uint,
    ? retryMultipleAPs: bool,
    ? protocolInformation: ProtocolInformation
}

ConnectionResponse = {
    id: text,    ; UUID of the connection
    ? protocolInformation: ProtocolInformation
}

ProtocolInformation = {
    ? ble: BLEProtocolInfo,
    ? zigbee: ZigbeeProtocolInfo
}

; BLE Protocol Information
BLEProtocolInfo = {
    ? services: [* BLEService],
    ? cached: bool,           ; default: false
    ? cacheExpiryDuration: uint, ; in seconds, default: 3600
    ? autoUpdate: bool,       ; default: true
    ? bonding: BondingType
}

BLEService = {
    serviceID: text,    ; UUID format
    ? characteristics: [* BLECharacteristic]
}

BLECharacteristic = {
    characteristicID: text,    ; UUID format
    ? flags: [* BLEFlag],
    ? descriptors: [* BLEDescriptor]
}

BLEDescriptor = {
    descriptorID: text    ; UUID format
}

BLEFlag = (
    "read" /
```

```
    "write" /
    "notify"
)

BondingType = (
    "default" /
    "none" /
    "justworks" /
    "passkey" /
    "oob"
)

; Zigbee Protocol Information
ZigbeeProtocolInfo = {
    ? endpoints: [* ZigbeeEndpoint]
}

ZigbeeEndpoint = {
    endpointID: uint,
    ? clusters: [* ZigbeeCluster]
}

ZigbeeCluster = {
    clusterID: uint,
    ? properties: [* ZigbeeProperty]
}

ZigbeeProperty = {
    attributeID: uint,
    propertyType: uint,
}

; =====
; From: cddl/api/protocolinfo.cddl
; =====
; CDDL translation of NIPC ProtocolInfo schemas (version 0.10.0)
; Source: nipc-openapi/protocolinfo/ProtocolInfo.yaml (+ BLE/Zigbee \
variants)

; Top-level wrappers
protocol-info-service-map = {
    protocolInformation: ble-service-map / zigbee-service-map,
    ...
}

protocol-info-broadcast = {
    protocolInformation: ble-broadcast / zigbee-broadcast,
    ...
}
```

```
}

; BLE protocol information
ble-service-map = {
  ble?: {
    services?: [* ble-service],
    cached?: bool,
    cacheExpiry?: int,
    autoUpdate?: bool,
    bonding?: bonding,
    ...
  },
  ...
}

bonding = "default" / "none" / "justworks" / "passkey" / "oob"

ble-service = {
  serviceID: uuid,
  characteristics?: [* ble-characteristic],
  ...
}

ble-characteristic = {
  characteristicID?: uuid,
  flags?: [* ble-flag],
  descriptors?: [* ble-descriptor],
  ...
}

ble-flag = "read" / "write" / "notify"

ble-descriptor = {
  descriptorID?: uuid,
  ...
}

ble-broadcast = {
  ble: {
    connectable?: bool,
    ...
  },
  ...
}

; Zigbee protocol information
zigbee-service-map = {
  zigbee: {
```



```

    endpoints?: [* zigbee-endpoint],
    ...,
  },
  ...
}

zigbee-endpoint = {
  endpointID: int,
  clusters?: [* zigbee-cluster],
  ...
}

zigbee-cluster = {
  clusterID?: int,
  properties?: [* zigbee-property],
  ...
}

zigbee-property = {
  attributeID?: int,
  propertyType?: int,
  ...
}

zigbee-broadcast = {
  zigbee: {
    ...,
  },
  ...
}

; Basic types
uuid = tstr .regex " (?i) ^ [ 0 - 9 a - f ] { 8 } - [ 0 - 9 a - f ] { 4 } - [ 0 - 9 a - f ] { 4 } - [ 0 - 9 a - \
f ] { 4 } - [ 0 - 9 a - f ] { 12 } $"
<CODE ENDS>

```

Appendix F. Example SDF model with protocol mappings for BLE

```

<CODE BEGINS> file "thermometer.sdf.json"
{
  "namespace": {
    "thermometer": "https://example.com/thermometer"
  },
  "defaultNamespace": "thermometer",
  "sdfThing": {
    "thermometer": {
      "sdfObject": {
        "health_thermometer": {

```

```
"description": "Health Thermometer",
"sdfProperty": {
  "temperature_type": {
    "description": "Temperature Type",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "1809",
        "characteristicID": "2A1D"
      }
    }
  },
  "measurement_interval": {
    "description": "Measurement Interval",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "1809",
        "characteristicID": "2A21"
      }
    }
  }
},
"sdfEvent": {
  "temperature_measurement": {
    "description": "Temperature Measurement",
    "sdfOutputData": {
      "sdfProtocolMap": {
        "ble": {
          "type": "gatt",
          "serviceID": "1809",
          "characteristicID": "2A1C"
        }
      }
    }
  },
  "intermediate_temperature": {
    "description": "Intermediate Temperature",
    "sdfOutputData": {
      "sdfProtocolMap": {
        "ble": {
          "type": "gatt",
          "serviceID": "1809",
          "characteristicID": "2A1E"
        }
      }
    }
  }
}
```

```

    }
  }
}
},
"description": "Generic Access, Device Information",
"sdfProperty": {
  "device_name": {
    "description": "Device Name",
    "observable": false,
    "writable": true,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "1800",
        "characteristicID": "2A00"
      }
    }
  },
  "appearance": {
    "description": "Appearance",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "1800",
        "characteristicID": "2A01"
      }
    }
  },
  "manufacturer_name_string": {
    "description": "Manufacturer Name String",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "180A",
        "characteristicID": "2A29"
      }
    }
  },
  "model_number_string": {
    "description": "Model Number String",
    "observable": false,

```

```
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "180A",
        "characteristicID": "2A24"
      }
    }
  },
  "hardware_revision_string": {
    "description": "Hardware Revision String",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "180A",
        "characteristicID": "2A27"
      }
    }
  },
  "firmware_revision_string": {
    "description": "Firmware Revision String",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "180A",
        "characteristicID": "2A26"
      }
    }
  },
  "system_id": {
    "description": "System ID",
    "observable": false,
    "writable": false,
    "readable": true,
    "sdfProtocolMap": {
      "ble": {
        "serviceID": "180A",
        "characteristicID": "2A23"
      }
    }
  }
},
"sdfEvent": {
  "isPresent": {
```

```
    "description": "BLE advertisements",
    "sdfOutputData": {
      "sdfProtocolMap": {
        "ble": {
          "type": "advertisements"
        }
      }
    },
    "isConnected": {
      "description": "BLE connection events",
      "sdfOutputData": {
        "sdfProtocolMap": {
          "ble": {
            "type": "connection_events"
          }
        }
      }
    }
  }
}
<CODE ENDS>
```

Figure 36: Example SDF model with protocol mappings for BLE

Authors' Addresses

Bart Brinckman
Cisco Systems
Brussels
Belgium
Email: bbrinckm@cisco.com

Rohit Mohan
Cisco Systems
170 West Tasman Drive
San Jose, 95134
United States of America
Email: rohitmo@cisco.com

Braeden Sanford
Philips
Cambridge,
United States of America

Email: braeden.sanford@philips.com