

CCAMP Working Group
Internet-Draft
Intended status: Standards Track
Expires: 13 April 2026

D. Beller, Ed.
Nokia
E. Le Rouzic
Orange
S. Belotti
G. Galimberti
Nokia
I. Busi
Huawei Technologies
10 October 2025

A YANG Data Model for Optical Impairment-aware Topology
draft-ietf-ccamp-optical-impairment-topology-yang-20

Abstract

In order to provision an optical connection through optical networks, a combination of path continuity, resource availability, and impairment constraints must be met to determine viable and optimal paths through the network. The determination of appropriate paths is known as Impairment-Aware Routing and Wavelength Assignment (IA-RWA) for a Wavelength Switched Optical Network (WSON), while it is known as Impairment-Aware Routing and Spectrum Assignment (IA-RSA) for a Spectrum Switched Optical Network (SSON).

This document provides a YANG data model for the impairment-aware TE topology in optical networks.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 13 April 2026.

Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	3
1.1. Terminology	4
1.2. Tree Diagram	6
1.3. Prefixes in Data Node Names	6
1.4. Requirements Language	7
2. Scope of this document and Data Plane Reference	
Architecture	7
2.1. Scope of this document	7
2.2. Optical Transport Network Data Plane	7
2.3. OTS and OMS Media Channel Group	8
2.3.1. Optical Tributary Signal (OTSi)	10
2.3.2. Optical Tributary Signal Group (OTSiG)	11
2.3.3. Media Channel (MC)	12
2.3.4. Media Channel Group (MCG)	13
2.4. Optical Amplifiers	14
2.5. Dynamic Gain Equalizers	17
2.6. Transponders	17
2.6.1. Standard Modes	18
2.6.2. Organizational Modes	19
2.6.3. Explicit Modes	20
2.6.4. Transponder Capabilities and Current Configuration	21
2.7. 3R Regenerators	23
2.8. Wavelength Selective Switch (WSS)/Filter	26
2.9. Optical Fiber	26
2.10. WDM-Node Architectures	27
2.10.1. Integrated WDM-node Architecture with Local Optical Transponders	27
2.10.2. Integrated WDM with Integrated Optical Transponders and Single Channel Add/Drop Interfaces for Remote Optical Transponders	28
2.10.3. Disaggregated WDM-TE-node Subdivided into Degree, Add/Drop, and Optical Transponder Subsystems	29

2.10.4. Optical Impairments Imposed by WDM-TE-Nodes	31
2.11. Optical Protection Architectures	32
2.11.1. Individual OTSi Protection	32
2.11.2. OMS MCG protection	44
3. YANG Model (Tree Structure)	53
4. Optical Impairment Topology YANG Model	62
5. Security Considerations	99
6. IANA Considerations	100
7. Acknowledgments	101
8. References	101
8.1. Normative References	101
8.2. Informative References	102
Appendix A. JSON Code Examples for Optical Protection Uses	
Cases	105
Appendix B. Optical Transponders in a Remote Shelf (Remote	
OTs)	119
B.1. JSON Examples for Optical Transponders in a Remote Shelf	
(Remote OTs)	122
Contributors	149
Additional Authors	149
Authors' Addresses	150

1. Introduction

In order to provision an optical connection (an optical path) through a wavelength switched optical networks (WSONs) as defined in [RFC9094] or spectrum switched optical networks (SSONs), a combination of path continuity, resource availability, and impairment constraints must be met to determine viable and optimal paths through the network. The determination of appropriate paths is known as Impairment-Aware Routing and Wavelength Assignment (IA-RWA) [RFC6566] for WSON, while it is known as IA-Routing and Spectrum Assignment (IA-RSA) for SSON.

An introduction to optical impairments and their impact on optical signals (degradation) is provided in [RFC6566].

This document provides a YANG data model for the impairment-aware Traffic Engineering (TE) topology in WSONs and SSONs. The YANG model described in this document is a WSON/SSON technology-specific Yang model based on the information model developed in [RFC7446] and the two encoding documents [RFC7581] and [RFC7579] that developed protocol independent encodings based on [RFC7446].

The intent of this document is to provide a YANG data model, which can be utilized by a Multi-Domain Service Coordinator (MDSC) to collect WSON impairment data from the Provisioning Network Controllers (PNCs) to enable impairment-aware optical path

computation according to the ACTN Architecture [RFC8453]. The communication between controllers is done via a NETCONF [RFC8341] or a RESTCONF interface. [RFC8040].

It is worth noting that optical data plane interoperability is a complex topic especially in a multi-vendor environment and usually requires joint engineering, which is independent from control plane and management plane capabilities. The YANG data model defined in this document is providing sufficient information to enable optical impairment-aware path computation.

Optical data plane interoperability is outside the scope of this document.

This document augments the generic TE topology YANG model defined in [RFC8795] where possible.

The optical impairment-aware topology for a WSON/SSON network based on the YANG data model defined in this document is intended to be used for exposing the network topology including optical impairments. Therefore, the topology information that is typically provided by a PNC is assumed to be read-only data, i.e., not configurable (read-write). This may change when the same optical impairment-aware topology model is used for other use cases than exposing the network topology. E.g., for a path computation engine, where topological elements could be added in the context of a what-if scenario analysis. This is outside of the scope of this document.

This document defines one YANG module: ietf-optical-impairment-topology (Section 3) according to the new Network Management Datastore Architecture [RFC8342].

1.1. Terminology

Refer to [RFC6566], [RFC7698], and [G.807] for the key terms used in this document.

The following terms are defined in [RFC7950] and are not redefined here:

- * client
- * server
- * augment
- * data model

- * data node

The following terms are defined in [RFC6241] and are not redefined here:

- * configuration data

- * state data

The terminology for describing YANG data models is found in [RFC7950].

The term ROADM in this document refers to the term "multi-degree reconfigurable optical add/drop multiplexer (MD-ROADM)" as defined in [G.672]. It does not include local optical transponders, which can be co-located in the same physical device (managed entity).

The term WDM-node refers to a physical device, which is managed as a single network element.

The term WDM-TE-node refers to those parts of a WDM-node (physical device) that are modeled as a TE-node as defined in [RFC8795], which may include a ROADM and/or multiple local optical transponders (OTs). Hence, a WDM-TE-node may only contain OTs.

The term "WDM-TE-network" refers to a set of WDM-TE-nodes as defined above that are interconnected via TE-links carrying WDM signals. These TE-links may include optical amplifiers.

The term "add/drop TE-link" refers to a TE-link representing the media channel between a transceiver's media port of a remote optical transponder (OT) and an add/drop port of the ROADM in the adjacent WDM-node. The add/drop TE-link typically carries a single optical tributary signal (OTSi, i.e., a modulated optical carrier, see section Section 2.3.1).

The term "bundled add/drop TE-link" refers to the TE-link bundling concept as defined in [RFC8795]. Multiple component links, add/drop TE-links in this case, are bundled into a single bundled add/drop TE-Link.

In the context of this document, the term "layer 0" refers to the photonic layer or WDM layer network in the architecture of the optical transport network (OTN) as defined in ITU-T Recommendation G.709 [G.709], ITU-T Recommendation G.872 [G.872], and ITU-T Recommendation G.807 [G.807] as opposed to the electrical switching layers of the OTN, which are typically referred to as layer 1 (L1). The term "layer 0" may also be used for other transport network technologies (e.g. copper-based, radio-based, or free space optics-based, etc.), which are outside the scope of this document.

1.2. Tree Diagram

A simplified graphical representation of the data model is used in Section 2 of this document. The meaning of the symbols in these diagrams is defined in [RFC8340].

1.3. Prefixes in Data Node Names

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, as shown in Table 1.

Prefix	YANG module	Reference
oit	ietf-optical-impairment-topology	[RFCXXXX]
l0-types	ietf-layer0-types	[I-D.ietf-ccamp-rfc9093-bis]
nw	ietf-network	[RFC8345]
nt	ietf-network-topology	[RFC8345]
tet	ietf-te-topology	[RFC8795]

Table 1: Prefixes and corresponding YANG modules

[Note to RFC editor: Please replace XXXX with the number assigned to the RFC once this draft becomes an RFC.]

1.4. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

2. Scope of this document and Data Plane Reference Architecture

2.1. Scope of this document


The optical impairment-aware topology YANG model defined in this document is a network model as defined in [RFC8969] and is applicable to devices and network controllers. The topology model provides read-only network topology status information that is typically used for path computation during service provisioning when a new service is established on the network.

The DWDM interface YANG model defined in [I-D.ietf-ccamp-dwdm-if-param-yang] is a device model as defined in [RFC8969] (a DWDM interface management model to be precise) and is intended to be used for device configuration.

2.2. Optical Transport Network Data Plane

This section provides a description of the optical transport network reference architecture and its relevant components to support optical impairment-aware path computation.

Figure 1 shows the reference architecture.

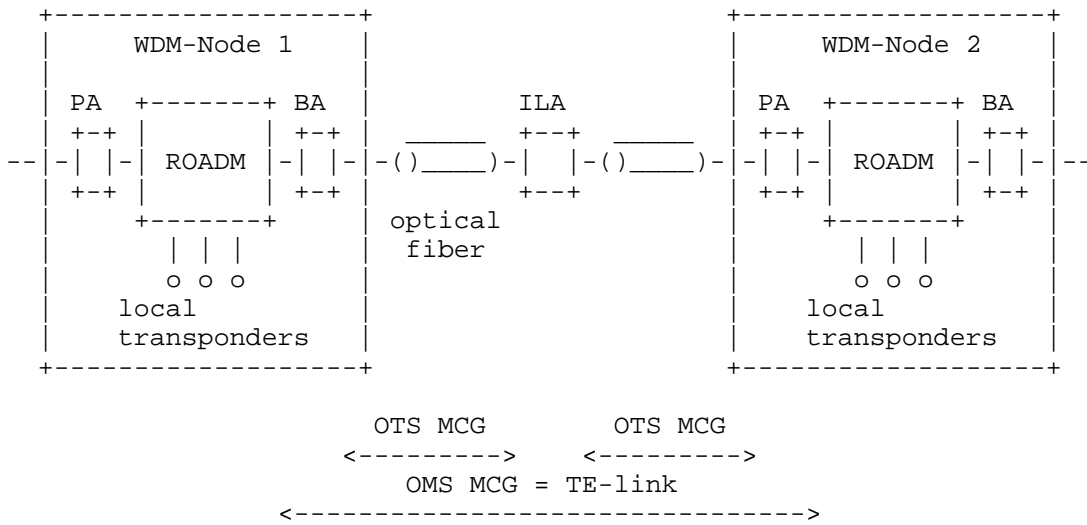

BA: Booster Amplifier (or egress amplifier)
 PA: Pre-Amplifier (or ingress amplifier)
 ILA: In-Line Amplifier
 OTS MCG: Optical Transmission Section MCG [G.807]
 OMS MCG: Optical Multiplex Section MCG [G.807]
 MCG: Media Channel Group [G.807]

Figure 1: Reference Architecture for Optical Transport Network

BA (WDM-node 1) is the egress Amplifier and PA (WDM-node 2) is the ingress amplifier for the OMS Media Channel Group (MCG) in the direction from left to right in Figure 1.

According to [G.807], clause 3.2.4, a Media Channel Group (MCG) represents "a unidirectional point-to-point management/control abstraction that represents a set of one or more media channels that are co-routed. A media channel group (MCG) is bounded by a pair of media ports."

2.3. OTS and OMS Media Channel Group

According to [G.807], an OTS Media Channel Group (MCG) represents a topological construct between two adjacent amplifiers, such as:

- (i) between a WDM-TE-node's BA and the adjacent ILA,
- (ii) between a pair of ILAs,
- (iii) between an ILA and the adjacent WDM-TE-node's PA.

[G.807] defines an OMS MCG as "The topological relationship between the media port on a filter or coupler where a set of media channels are aggregated and the media port on a filter or coupler where one or more media channel is added to or removed from that aggregate. All of the media channels that are represented by the OMS MCG must be carried over the same serial concatenation of OTS MCGs and amplifiers."

An OMS MCG originates at the ROADM in the source WDM-node and terminates at the ROADM in the destination WDM-node traversing the Booster Amplifier (BA) and the Pre-Amplifier (PA) in the WDM-nodes as well as the In-Line Amplifiers (ILAs) between the two WDM-nodes.

An OMS MCG can be decomposed into a sequence of OTS MCGs and amplifiers.

An OMS MCG traverses a sequence of optical elements between the ROADM function of two adjacent WDM-nodes as depicted in Figure 1 where the OMS MCG is terminated. These elements can be in transmit direction: a Booster Amplifier (BA), one or more fiber sections with in-line amplifiers (ILAs), and a Pre-Amplifier (PA). A concentrated loss element can be used to describe an insertion loss caused, for example, by a fiber connector along the sequence of optical elements.

In TE-topology terms, the OMS MCG is modeled as a WDM TE-link interconnecting two WDM-TE-nodes. A network controller can retrieve the optical impairment data for all the WDM TE-link elements defined in the layer-0 topology YANG model.

The optical impairments related to the link between remote optical transponders, located in a different WDM-TE-node (an IP router with integrated optical transponders for example), can also be modeled as a WDM TE-link using the same optical impairments as those defined for a WDM TE-link between WDM-TE-nodes (OMS MCG). In this scenario, the node containing the remote optical transponders can be considered as WDM-TE-node with termination capability only and no switching capabilities.

A WDM TE-link is terminated on both ends by a link termination point (LTP) as defined in [RFC8795]. Links between WDM nodes in optical transport networks are typically bidirectional. Generally, they have different impairments in the two directions and hence they MUST be modeled as a pair of two unidirectional TE-links following the [RFC8795] modeling approach. Unlike TE-links, which are unidirectional, the LTPs on either end of the TE-link pair forming the bidirectional link, are bidirectional as described in [I-D.ietf-teas-te-topo-and-tunnel-modeling] and the pair of unidirectional links are connected to the same bidirectional LTP on either end of the link pair.

2.3.1. Optical Tributary Signal (OTSi)

The OTSi is defined in ITU-T Recommendation G.959.1, section 3.2.4 [G.959.1] as "Optical signal that is placed within a network media channel for transport across the optical network. This may consist of a single modulated optical carrier or a group of modulated optical carriers or subcarriers." The YANG model defined in Section 4 assumes that a single OTSi consists of a single modulated optical carrier. This single modulated optical carrier conveys digital information. Characteristics of the OTSi signal are modulation scheme (e.g. QPSK, 8-QAM, 16-QAM, etc.), baud rate (measure of the symbol rate), pulse shaping (e.g. raised cosine - complying with the Nyquist inter symbol interference criterion), etc.

Path computation needs to know the existing OTSi signals for each OMS link in the topology to determine the optical impairment impact of the existing OTSi signals on the optical feasibility of a new OTSi signal and vice versa, i.e., the impact of the new OTSi on the existing OTSi signals. For determining the optical feasibility of the new OTSi, it is necessary to know the OTSi properties like carrier frequency, baud rate, and signal power for all existing OTSi signals on each OMS link.

Additionally, it is necessary for each WDM-TE-node in the network to know the OTSi signals that are added to or dropped from a WDM TE-link (OMS MCG) link as well as the optical power of these OTSi signals to check whether the WDM-TE-node's optical power constraints are met.

The optical impairment-aware topology YANG model in Section 3 defines the OTSi properties needed for optical impairment-aware path computation including the spectrum occupied by each OTSi signal. The model also defines a pointer (leafref) from the OTSi to the transceiver module terminating the OTSi signal.

The OTSi signals in the YANG model are described by augmenting the network and each OTSi signal is uniquely identified by its `otsi-carrier-id`, which is unique within the scope of the OTSiG (see Section 2.3.2 below) the OTSi belongs to.

2.3.2. Optical Tributary Signal Group (OTSiG)

The OTSiG is defined in ITU-T Recommendation G.807 [G.807] as a "set of optical tributary signals (OTSi) that supports a single digital client". Hence, the OTSiG is an electrical signal that is carried by one or more OTSi's. The relationship between the OTSiG and the the OTSi's is described in [G.807], section 10.2. The YANG model in Section 3 supports both cases: the single OTSi case where the OTSiG contains a single OTSi (see [G.807], Figure 10-2) and the multiple OTSi case where the OTSiG consists of more than one OTSi (see [G.807], Figure 10-3). From a layer 0 topology YANG model perspective, the OTSiG is a logical construct that associates the OTSi's, which belong to the same OTSiG. The typical application of an OTSiG consisting of more than one OTSi is inverse multiplexing. Constraints exist for the OTSi's belonging to the same OTSiG such as: (i) all OTSi's must be co-routed over the same optical fibers and nodes and (ii) the differential delay between the different OTSi's may not exceed a certain limit. Example: a 400Gbps client signal may be carried by 4 OTSi's where each OTSi carries 100Gbps of client traffic.

All OTSiGs are described in the YANG model by augmenting the network and each OTSiG is uniquely identified by its `otsi-group-id`, which is unique within the network. Each OTSiG also contains a list of the OTSi signals belonging to the OTSiG.

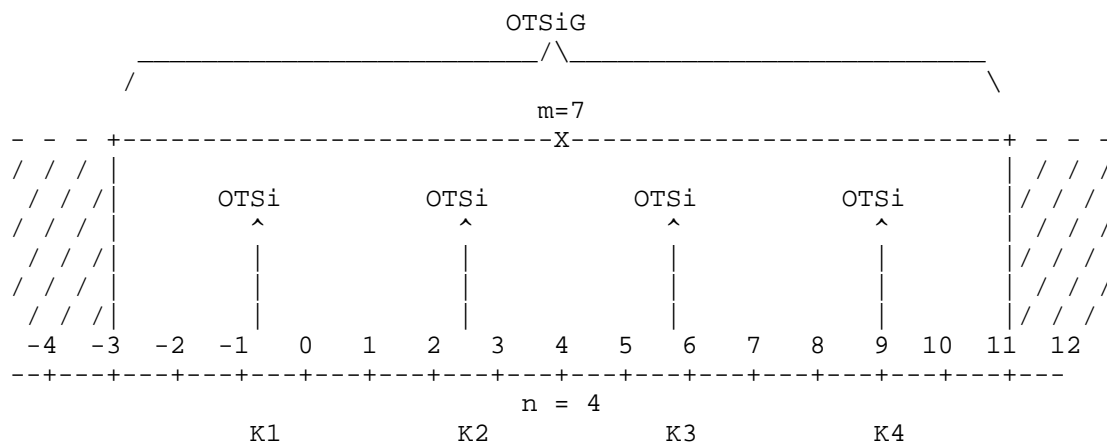


Figure 2: MC Example containing all 4 OTSi signals of an OTSiG

2.3.3. Media Channel (MC)

[G.807] defines a "media channel" as "A media association that represents both the topology (i.e., the path through the media) and the resource (i.e., frequency slot or effective frequency slot) that it occupies." In this document, the term "channel" is occasionally used to indicate the resource of an MC (i.e., frequency slot or effective frequency slot), without representing topology.

In this document, an end-to-end MC is defined as a type of MC, which is formed by the serial concatenation of all the MCs from source transceiver media ports to destination transceiver media ports. This end-to-end MC is defined across all the ROADM nodes along the end-to-end optical path with the same nominal central frequency n and frequency slot of width m , which represents the effective frequency slot of the end-to-end MC. An end-to-end MC can carry a single OTSi, or multiple OTSi signals belonging to the same OTSiG.

[G.807_Amd1] defines a "network media channel (NMC)" as "a type of media channel that is formed by the serial concatenation of all media channels between the media port of a modulator and the media port of a demodulator". The modulator and demodulator are integral functions of a transceiver and their media ports do not necessarily coincide with the media port of the transceiver, which is associated with the transceiver's physical optical port. Due to this difference, the end-to-end MC is used in this document based on the definition in the previous paragraph.

In section Section 2.11, the term "end-to-end MC path" is used to describe the topological aspect of the end-to-end MC, i.e., the path through the media (see: [G.807_Amd1], section 7.1.2). This is in line with the TE path defined in [RFC8795], section 3.9, where the TE path is defined as "an ordered list of TE links and/or TE nodes on the TE topology graph" interconnecting a pair of tunnel termination points (TTPs).

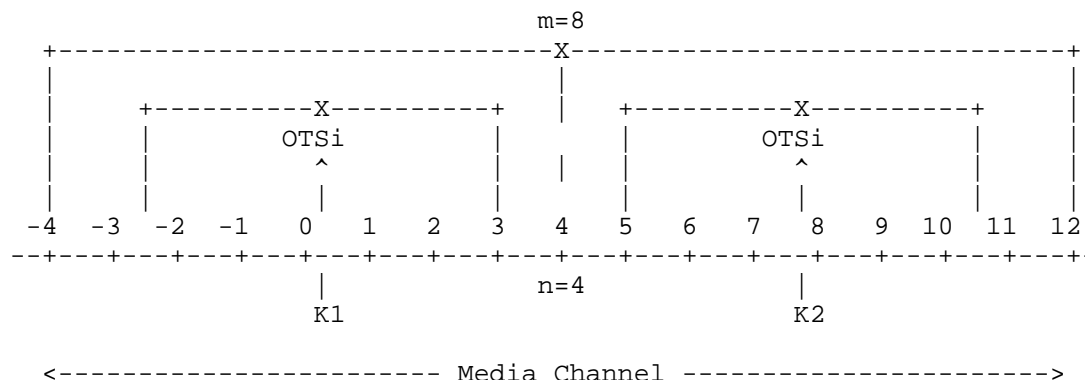


Figure 3: MC Example containing both OTSi signals of an OTSiG

The frequency slot of the MC is defined by the n value defining the central frequency of the MC and the m value that defines the width of the MC following the flexible grid definition in [G.694.1]. In this model, the effective frequency slot as defined in [G.807] is equal to the frequency slot of this MC. It is also assumed that ROADM devices can switch MCs. For various reasons (e.g. differential delay), it is preferred to use a single MC for all OTSi's of the same OTSiG. It may however not always be possible to find a single MC for carrying all OTSi's of an OTSiG due to spectrum occupation along the OTSiG path.

2.3.4. Media Channel Group (MCG)

ITU-T [G.807] defines the Media Channel Group MCG as "A unidirectional point to point management/control abstraction that represents a set of one or more media channels that are co-routed." The YANG model in Section 3 assumes that the MCG is a logical grouping of one or more MCs that are used to carry all OTSi's belonging to the same OTSiG.

The MCG can be considered as an association of MCs without defining a hierarchy where each MC is defined by its (n,m) value pair. An MCG consists of more than one MC when no single MC can be found from source to destination that is wide enough to accommodate all OTSi's (modulated carriers) that belong to the same OTSiG. In such a case the set of OTSi's belonging to a single OTSiG must be split across 2 or more MCs.

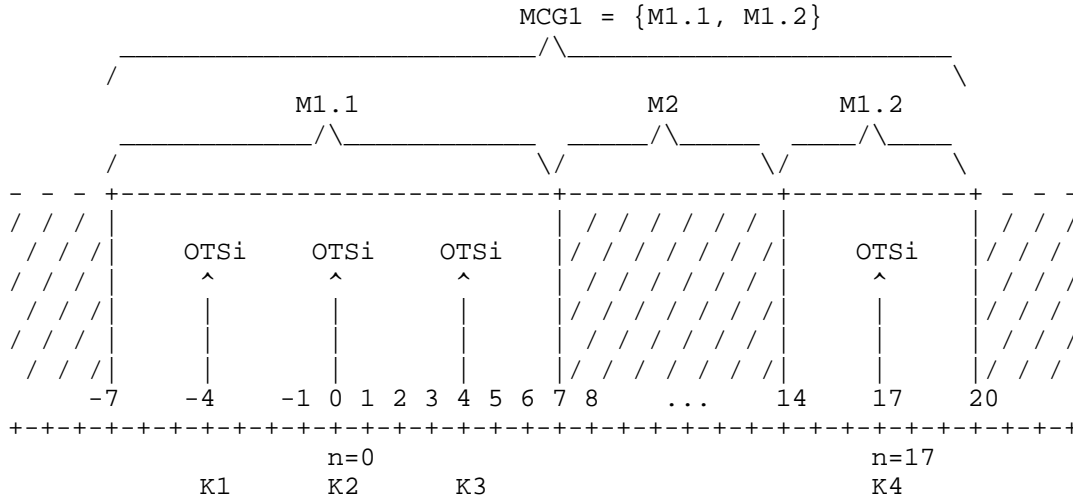


Figure 4: MCG Example with 2 MCs

The MCG is relevant for path computation because all end-to-end MCs belonging to the same MCG MUST be co-routed, i.e., MUST follow the same path. Additional constraints may exist (e.g. differential delay).

2.4. Optical Amplifiers

Optical amplifiers are used in WDM networks for amplifying the optical signal in the optical domain without any optical to electrical and electrical to optical conversion. Three major optical amplifier technologies are existing today:

- * Erbium Doped Fiber Amplifiers (EDFAs)
- * Raman Amplifiers
- * Semiconductor Optical Amplifiers (SOAs)

In today's WDM networks EDFAs and Raman amplifiers are widely used. Raman amplifiers have become attractive due to their large spectral gain bandwidth, which can be quite flat, with similar or even lower noise figures compared to EDFAs. On the other hand, Raman amplifiers consume more power and are usually more expensive than EDFAs.

Raman amplifiers are distributed amplifiers where an optical pump signal is injected typically in opposite direction to the optical signal that is amplified (backward pump, counter-propagating pump light). Injecting the optical pump signal in the same direction is also possible (forward pump, co-propagating pump light). For optical amplifiers, the YANG model defines Raman pump light attributes

describing the direction (raman-direction) with respect to the signal that is amplified and optical frequency and power for the pump light source(s) contained in the raman-pump list. These Raman amplifier-specific attributes are optional as they are only applicable to Raman amplifiers. For determining the optical amplifier type, i.e., to figure out whether an optical amplifier is a Raman amplifier, the type-variety attribute is used. Due to the distributed nature of the Raman amplifier it is difficult to clearly separate the amplifier from the fiber span into which the pump signal is injected. From a topology modeling perspective, the Raman amplifier is modeled as two OMS line elements:

1. a passive fiber element accounting for the fiber loss only and not the resulting loss including the Raman gain
2. an amplifier element providing all optical amplifier properties (gain, tilt, etc.). On the OMS-link, the amplifier element is placed where the pump is located and the geolocation information also indicates the location of the pump.

Amplifiers can be classified according to their location along the TE-link (OMS MCG). There are three basic amplifier types: In-Line Amplifiers (ILAs), Pre-Amplifiers and Booster Amplifiers. ILAs are separate physical devices while Pre-Amplifiers and Booster Amplifiers are integral elements of a WDM-node. From a data modeling perspective, node-internal details should not be modeled and should be abstracted as much as possible. For Pre-Amplifiers and Booster Amplifiers, however, a different approach has been taken, and they are modeled as TE-link elements as they have the same optical impairments as ILAs.

ILAs may have a variable optical attenuator on the ingress side (in-voa attribute) allowing to control the input power of the WDM signal (OMS MCG) entering the gain stage of the ILA. It may also have a variable optical attenuator on the egress side, which allows to control the optical power of the WDM output signal (OMS MCG) of the ILA. The actual-gain attribute reflects the gain of the ILA gain stage and does not include the attenuation of the in-voa and/or out-voa.

To support the modeling of multi-band (e.g., C + L band) and multi-stage (cascaded) amplifiers as depicted in Figure 5, the OMS element that describes an optical amplifier may contain an unordered list of amplifier-elements. The position of the element is based on the following attributes:

- * lower-frequency and upper-frequency describing the frequency band the set of amplifier-elements are operating in.

- * stage-order describing the sequential order of the cascaded amplifier-elements for the frequency band.

The detailed representation of the amplifier stages is not always mandatory. Abstraction is allowed as long as the optical impairments of the multi-stage amplifier are modeled properly. For example, the detailed representation of the cascaded elements is needed in case the amplifier supports both amplification of the signal as well as the DGE function described in Section 2.5.

Multi-band amplifiers like the dual-band amplifier depicted in Figure 5 have a band-separating filter at the input and a band-combining multiplexer combining all the bands at the output. This filter and multiplexer functions are not modeled explicitly and their optical impairments are subsumed in the optical impairments of the amplifier components.

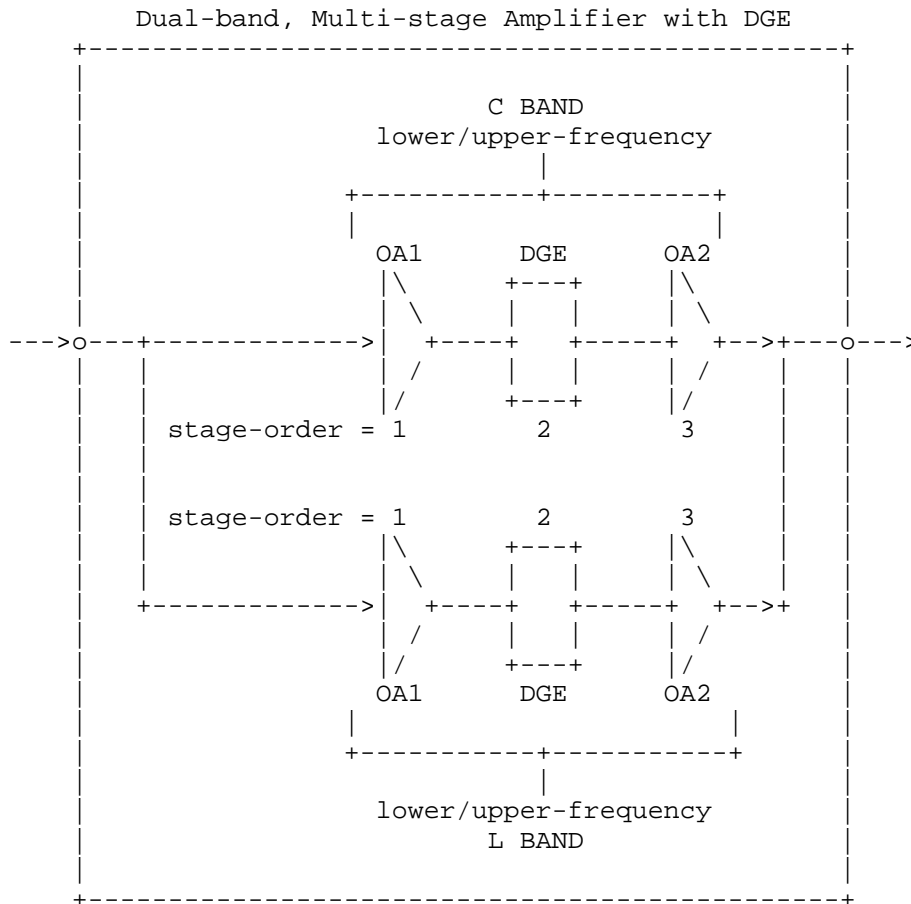


Figure 5: Example of a Dual-band, Multi-stage Amplifier with DGE Functionality

ILAs are placed at locations where the optical amplification of the WDM signal is required on the TE-link (OMS MCG) between two WDM-TE-nodes. Geolocation information is already defined for TE nodes in [RFC8795] and is also beneficial for ILAs. Therefore, the same geolocation container has been added to the amplifier element on an OMS link containing altitude, latitude, and longitude as optional attributes.

2.5. Dynamic Gain Equalizers

A Dynamic Gain Equalizer (DGE) is an optical equipment that is capable of adjusting the optical power on a per channel basis in order to compensate the channel power variation as a result of variable gain or loss the DWDM signals experienced while propagating through the network. The channel power can be configured explicitly or in the form of power-spectral-density.

2.6. Transponders

A transponder is an optical equipment that sends and receives the optical signal from a DWDM network. A transponder can have one or more transceiver modules. A transceiver represents a transmitter and its corresponding receiver (Tx/Rx pair) as defined in ITU-T Recommendation G.698.2 [G.698.2]. In addition to the transceiver, which is terminating an OTSi signal, a transponder typically provides additional layer 1 functionality like for example aggregation (multiplexing) of client layer signals, which is outside the scope of this document addressing layer 0 aspects of transponders.

The termination of an OTSi signal by a transceiver is modeled as a function of the tunnel termination point (TTP) as defined in [RFC8795]. Because optical transport services (TE tunnels) are typically bidirectional, a TTP is also modeled as a bidirectional entity like the LTP described in Section 2.3. Moreover, a TTP can terminate one or several OTSiG signals (tunnels) as described in [I-D.ietf-teas-te-topo-and-tunnel-modeling] and each OTSiG consists of one or multiple OTSi signals as described in Section 2.3.2. Therefore, a TTP can be associated with multiple transceivers.

A transponder is typically characterized by its data/symbol rate and the maximum distance the signal can travel. Other transponder properties are: carrier frequency for the optical channels, output power per channel, measured input power, modulation scheme, FEC, etc.

From a path computation perspective, the selection of the compatible configuration of the source and the destination transceivers is an important factor for optical signals to traverse through the DWDM network.

The YANG model defines three different approaches to describe the transceiver capabilities (called "modes") that are needed to determine optical signal compatibility:

- * Standard Modes
- * Organizational Modes
- * Explicit Modes

2.6.1. Standard Modes

A standard mode is related to an optical specification developed by an SDO organization. Currently, the "Standard Modes" can only be referred to ITU-T Recommendation G.698.2 [G.698.2] since ITU-T Recommendation G.698.2 is the only standard defining "Standard Modes" today. Nothing is precluding, however, to consider other specifications provided by any other SDO in the Standard Mode context as soon as such specifications will be available. An application code as defined in ITU-T G.698.2 [G.698.2] represents a standard ITU-T G.698.2 optical interface specification towards the realization of transversely compatible DWDM systems. Two transceivers supporting the same application code and a line system matching the constraints, defined in ITU-T G.698.2, for that application code will interoperate. As the characteristics are encoded in the application code, the YANG model in this document only defines a string, which represents that application code.

For the standard modes, some additional attributes are defined. The most important one is the line-coding-bitrate attribute, which was added because [G.698.2] lists 100gpbs application codes supporting two data formats, an OTU4 related data format and a Flex-O related data format. The supported data formats for an application code can be described by listing the supported data formats via the line-coding-bitrate attribute as transceiver capability.

Moreover, the transceiver properties like optical carrier frequency range, optical carrier tunability, and transmitter/receiver optical power ranges can be described as optional attributes in case they differ from the specification for the standard mode, i.e., as defined in [G.698.2]. A transceiver may support extended optical frequency ranges or optical power ranges or a finer optical carrier tunability. These capabilities can be described explicitly if needed.

2.6.2. Organizational Modes

Organizations like operator groups, industry fora, or equipment vendors can define their own optical interface specifications and make use of transceiver capabilities going beyond existing standards.

An organizational mode is identified by the organization-identifier attribute defining the scope and an operational-mode that is meaningful within the scope of the organization. Hence, the two attributes MUST always be considered together. It is the responsibility of the organization to assign operational modes and to ensure that operational modes are unique and unambiguous within the scope of the organization.

Two transceivers can be interconnected, if they have at least one (organization-identifier, operational-mode) pair in common and if the supported carrier frequency and power attributes have a matching range. This is a necessary condition for path computation in the context of organizational modes.

An operational mode is a transceiver preset (a configuration with well-defined parameter values) subsuming several transceiver properties defined by the optical interface specification - these properties are not provided for an operational mode and are therefore not defined in the YANG model. Examples of these properties are:

- * FEC type
- * Modulation scheme
- * Encoding (mapping of bit patterns (code words) to symbols in the constellation diagram)
- * Baud rate (symbol rate)
- * Carrier bandwidth (typically measured in GHz)

The major reason for these transceiver presets is the fact that the attribute values typically cannot be configured independently and are therefore advertised as supported operational mode capabilities. It is the responsibility of the organization to assign operational modes and to ensure that operational modes are unique and not ambiguous within the scope of the organization.

In addition to the transceiver properties subsumed by the operational mode, optical power and carrier frequency related properties are modeled separately, i.e., outside of the operational mode. This modeling approach allows transponders using different transceiver

variants (e.g. optical modules) with slightly different power and/or frequency range properties to interoperate without defining separate operational modes. Different optical modules (pluggables) from different suppliers typically have slightly different input and output power ranges or may have slightly different carrier frequency tuning ranges.

The received channel power and the received total power are two parameters that can be measured by the receiver and can be provided by the transceiver in order to allow a controller to determine the expected performance of the end-to-end service taking into account the optical impairments along the path.

An organization MAY define the operational modes to include the optical power and carrier frequency related properties following the application code approach as defined in ITU-T Recommendation G.698.2 [G.698.2]. In such a case, the explicit optical power and carrier frequency related optional attributes should be omitted in order to avoid redundant information in the description of the transceiver capabilities. If these attributes are provided in addition to the operational modes including these attribute values implicitly, the parameter values provided explicitly replace the implicit values and take precedence. This should, however, only be done in exceptional cases and should be avoided whenever possible. In case an implicitly given range is extended utilizing the explicit optional attributes, a path computation policy rule may be applied to select a value preferably from the range defined implicitly and to only select a value from the extended range if no path can be found for values in the implicitly defined range. Path computation policy is outside the scope of this topology YANG model.

In summary, the optical power and carrier frequency related attributes shall either be described implicitly by the operational mode following the definition provided by that organization or shall be described explicitly when the optical power and carrier frequency related properties are not included in the operational mode definition.

2.6.3. Explicit Modes

The explicit mode allows to encode, explicitly, any subset of parameters e.g., FEC type, Modulation type, etc, to enable a controller entity to check for interoperability by means outside of this document. It shall be noted that using the explicit encoding does not guarantee interoperability between two transceivers even in case of identical parameter definitions. The explicit mode shall therefore be used with care, but it could be useful when no common Application Codes or Organizational Modes exist or the constraints of

common Application Codes or Organizational Modes cannot be met by the line system.

2.6.4. Transponder Capabilities and Current Configuration

The YANG model described in Section 3 defines the optical transceiver properties. They are divided between:

- a. Optical transceiver capabilities, describing how it can be configured
- b. Current transceiver setting, indicating how it is currently configured

The transceiver capabilities are described by the set of modes the transceiver is supporting. Each mode must follow only one of the three mode options defined in Section 2.6.1, Section 2.6.2, and Section 2.6.3 (choice in the YANG model). The YANG model allows to describe the transceiver capabilities by mixing different modes. A transceiver may support some ITU-T application codes and in addition some organizational or explicit modes.

A transceiver mode description comprises the following properties:

- * Supported transmitter tuning range with min/max nominal carrier frequency [f_tx_min, f_tx_max]
- * Supported transceiver tunability describing the transmitter's frequency fine tuning granularity (the minimum distance between two adjacent carrier frequencies in GHz)
- * Supported transmitter power range [p_tx-min, p_tx_max]
- * Supported receiver channel power range [p_rx-min, p_rx_max]
- * Supported maximum total power, rx power for all channels fed into the receiver

These optical transceiver properties are explicitly defined in the model for explicit and organizational modes, while they are implicitly defined for the application codes (see ITU-T G698.2 [G.698.2]).

The set of optical impairment limits, e.g., min optical signal to noise ratio (OSNR), max polarization mode dispersion (PMD), max chromatic dispersion (CD), max polarization dependent loss (PDL), quality factor (Q-factor) limit, are explicitly defined for the explicit modes while they are defined implicitly for the application codes and organizational modes.

The model provides information about the maximum accumulated impairments supported by the transceiver modes (i.e., max-chromatic-dispersion, max-polarization-dependent-loss, max-polarization-mode-dispersion, max-diff-group-delay). For CD, PMD and PDL impairments, the model also supports the option to provide more detailed OSNR penalties as a function of the accumulated impairments (i.e., cd-penalty, pmd-penalty and pdl-penalty). In this case the attributes providing the maximum accumulated impairments MAY be omitted and the maximum accumulated impairment MUST be listed in the penalty list. In case both are present, there MUST NOT be any value in the penalty list above the maximum accumulated impairment.

It is possible that the set of parameter values defined for an explicit mode may also be represented in form of an organizational mode or one or more application codes. The "compatible-modes" container may provide two different lists with pointers to application codes and organizational modes, respectively.

The current transponder configuration describes the properties of the OTSi transmitted or received by the transceiver attached to a specific transponder port.

Each OTSi has the following three pointer attributes modeled as leafrefs:

- * Pointer to the transponder instance containing the transceiver terminating the OTSi
- * Pointer to the transceiver instance terminating the OTSi
- * Pointer to the currently configured transceiver mode

Additionally, the OTSi is described by the following frequency and optical power related attributes:

- * current carrier-frequency
- * currently transmitted channel power
- * currently received channel power

- * currently received total power

2.7. 3R Regenerators

Optical transponders are usually used to terminate a layer 0 tunnel (layer 0 service) in the WDM layer. If, however, no optical path can be found from the source transponder to the destination transponder that is optically feasible due to the optical impairments, one or more 3R regenerators are needed for regenerating the optical signal in intermediate nodes. The term "3R" regenerator means: reamplification, reshaping, retiming. As described in [G.807], Appendix IV, a 3R regenerator terminates the OTSi and generates a new OTSi. Depending on the 3R regenerator capabilities, it can provide functions such as carrier frequency translation (carrier-frequency), changes in the modulation scheme (modulation-type) and FEC (FEC-type) while passing through the digital signal except the FEC (the FEC is processed and errors are corrected).

The 3R regeneration compound function is illustrated in section 10.1 of [G.798.1], and sections 10.3 and 10.4 provide examples of a ROADM architecture and a photonic cross-connect architecture including 3R regenerators. Based on the functionality provided, 3R regenerators are considered as topological layer 0 entities because they are needed for layer 0 path computation in case the optical impairments make it impossible to find an optically feasible end-to-end path from the source transponder to the destination transponder without 3R regeneration. When an end-to-end path includes one or more 3R regenerators, the corresponding layer 0 tunnel is subdivided into 2 or more segments between the source transponder and the destination transponder terminating the layer 0 tunnel.

3R regenerators are usually realized by a pair of optical transponders, which are described in Section 2.6. If a pair of optical transponders is used to perform a 3R regenerator function, two different configurations are possible involving the pair of optical transceivers of the two optical transponders:

- * The two transponders can be operated in a back-to-back configuration where the transceiver of each optical transponder receives and transmits the optical signal from/to the same segment of the end-to-end tunnel. This means that each transceiver is operated in a bi-directional mode.


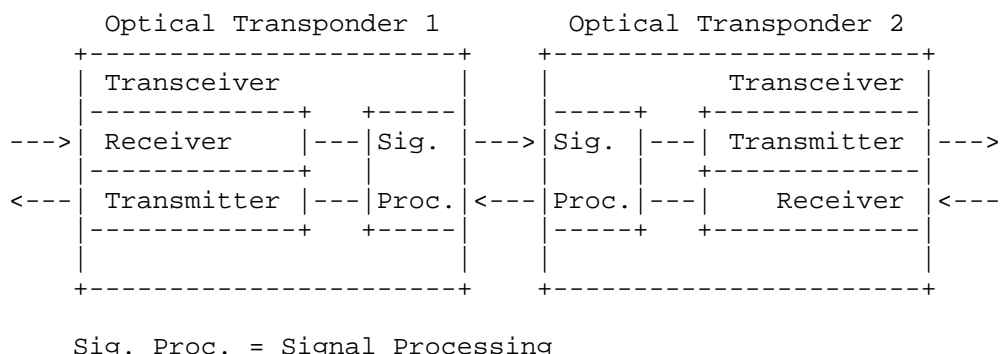


Figure 6: Back-to-back 3R Regenerator Example

- * The two transponders can be operated in a configuration where each transponder performs the 3R regeneration function in one direction, one in forward direction (from source to destination) and the other in the reverse direction. In this configuration, the transceiver of each optical transponder receives the signal from one segment and transmits the regenerated optical signal into the adjacent segment. This configuration is also called cross-regeneration and each transceiver is operated in an uni-directional mode.

Implementations MAY support the change of the carrier frequency where the receiver may operate at a different optical frequency as the transmitter. The transceiver mode is a property of the transceiver and is applied to the transmitter and the receiver. Therefore, the transceiver mode is the same for the two segments on the two sides of the 3R regenerator realized by two transceivers operated in the uni-directional mode.

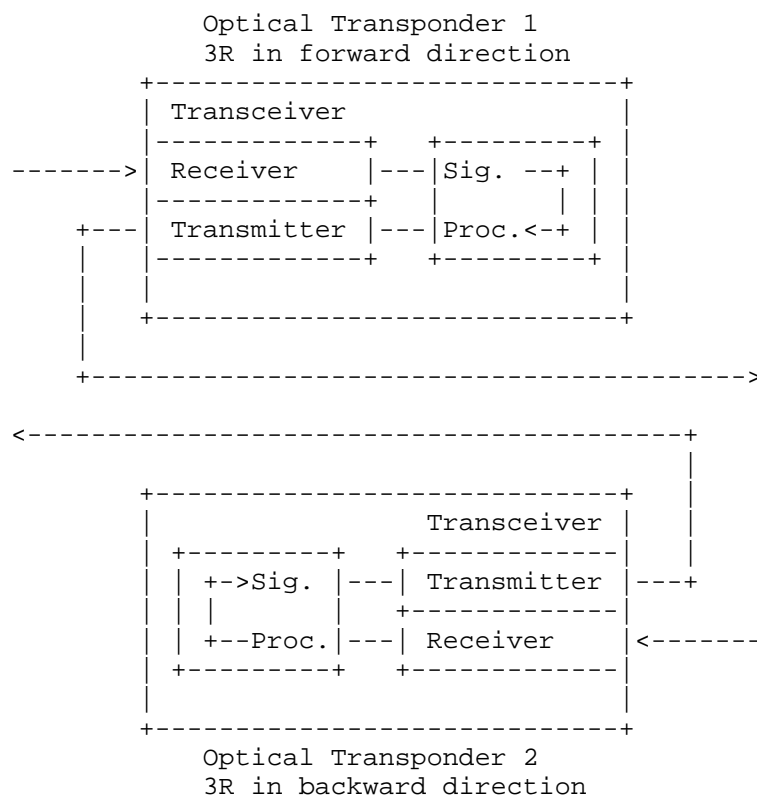

Sig. Proc. = Signal Processing

Figure 7: Cross-3R Regenerator Example

Since 3R regenerators are composed of an optical transponder pair, the capability whether an optical transponder can be used as a 3R regenerator is added to the transponder capabilities. Hence, no additional entity is required for describing 3R regenerators in the TE-topology YANG model. The optical transponder capabilities regarding the 3R regenerator function are described by the following two YANG model attributes:

- * supported-termination-type
- * supported-3r-mode

The supported-termination-type attribute describes whether the optical transponder can be used as tunnel terminating transponder only, as 3R regenerator only, or whether it can support both functions. The supported-3r-mode attribute describes the configuration of the transponder pair forming the 3R regenerator.

2.8. Wavelength Selective Switch (WSS)/Filter

A WSS separates the incoming light from an input port spectrally as well as spatially, then selects the wavelength that is of interest by deflecting it from the original optical path, and finally couples it to an outgoing optical fiber port. The WSS/Filter is internal to a ROADM device. This document does not model the internals of a ROADM's WSS.

2.9. Optical Fiber

There are various optical fiber types defined by ITU-T. For optical feasibility calculation, several fiber-level parameters need to be taken into account, such as, fiber-type, length, loss coefficient, PMD, connectors (in/out).

The loss of a fiber span can be described in two ways:

- i. As calculated loss using the provided loss coefficient (loss-coef) and length of the fiber.
- ii. As measured loss provided by the total-loss attribute.

The total-loss SHOULD be provided when it can be measured with a power measurement facility at the output of the upstream node (input of the fiber span) and a power measurement facility at the input of the downstream node (output of the fiber span). This measured loss typically differs from the calculated loss because it includes all loss contributions including possible accumulated loss due to imperfect fiber splices and connector losses. It can also change over time due to changing fiber conditions, e.g., in case of a fiber cut. In case the total-loss cannot be measured (no power measurement facilities in place), the total-loss defined as optional leaf in the YANG model SHALL be omitted.

N.B.: In case of Raman amplifiers, the Raman gain SHALL NOT be included in the measured loss to properly reflect only the loss of the fiber span in the total-loss attribute.

ITU-T G.652 defines Standard Singlemode Fiber; G.654 Cutoff Shifted Fiber; G.655 Non-Zero Dispersion Shifted Fiber; G.656 Non-Zero Dispersion for Wideband Optical Transport; G.657 Bend-Insensitive Fiber. There may be other fiber-types that need to be considered.

2.10. WDM-Node Architectures

The WDM-node architectures in today's dense wavelength division multiplexing (DWDM) networks can be categorized as follows:

- * Integrated WDM-node architecture with local optical transponders
- * Integrated WDM-node architecture with local optical transponders and single channel add/drop ports for remote optical transponders
- * Disaggregated WDM-node architecture where the WDM-TE-node is composed of degree, add/drop, and optical transponder subsystems handled as separate WDM-nodes

The TE topology YANG model augmentations for DWDM networks including optical impairments defined in Section 4 intend to cover all the 3 categories of WDM-node architectures listed above. In the case of a disaggregated WDM-node architecture, it is assumed that the optical domain controller already performs some form of abstraction and presents the WDM-TE-node representing the disaggregated WDM-nodes in the same way as an integrated WDM-TE-node with local optical transponders if the optical transponder subsystems and the add/drop subsystems are co-located (short fiber links are not imposing any significant optical impairments).

The different WDM-node architectures are briefly described and illustrated in the following subsections.

2.10.1. Integrated WDM-node Architecture with Local Optical Transponders

Figure 1 and Figure 8 below show the typical architecture of an integrated WDM-node, which contains the optical transponders as an integral part of the WDM-node. Such an integrated WDM-node provides DWDM interfaces as external interfaces for interconnecting the device with its neighboring WDM-node (see OMS MCG in Figure 1). The number of these interfaces denote also the degree of the WDM-node. A degree 3 WDM-node for example has 3 DWDM links that interconnect the WDM-node with 3 neighboring WDM-nodes. Additionally, the WDM-node provides client interfaces for interconnecting the WDM-node with client devices such as IP routers or Ethernet switches. These client interfaces are the client interfaces of the integrated optical transponders.

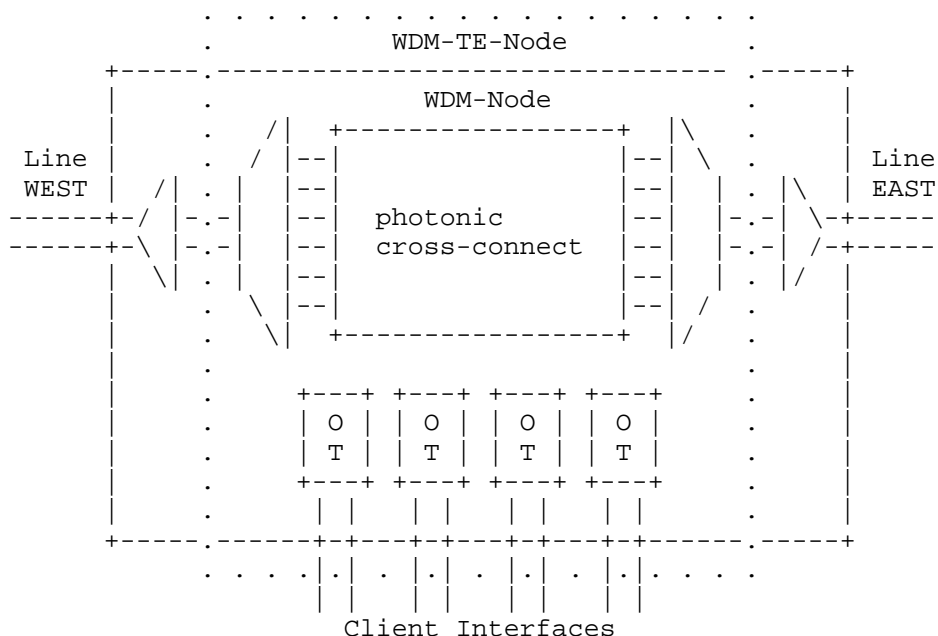


Figure 8: Integrated WDM-node Architecture with Local Transponders

2.10.2. Integrated WDM-node with Integrated Optical Transponders and Single Channel Add/Drop Interfaces for Remote Optical Transponders

Figure 9 below shows the extreme case where all optical transponders are not integral parts of the WDM-node but are separate devices that are connected to the add/drop ports of the WDM-node. If the optical transponders and the WDM-node are co-located and if short single channel fiber links are used to interconnect the optical transponders with an add/drop port of the WDM-node, the optical domain controller MAY present these optical transponders in the same way as local optical transponders. If, however, the optical impairments of the single channel fiber link between the optical transponder and the add/drop port of the WDM-node cannot be neglected, it is necessary to represent the fiber link with its optical impairments in the topology model. This also implies that the optical transponders belong to a separate TE-node.

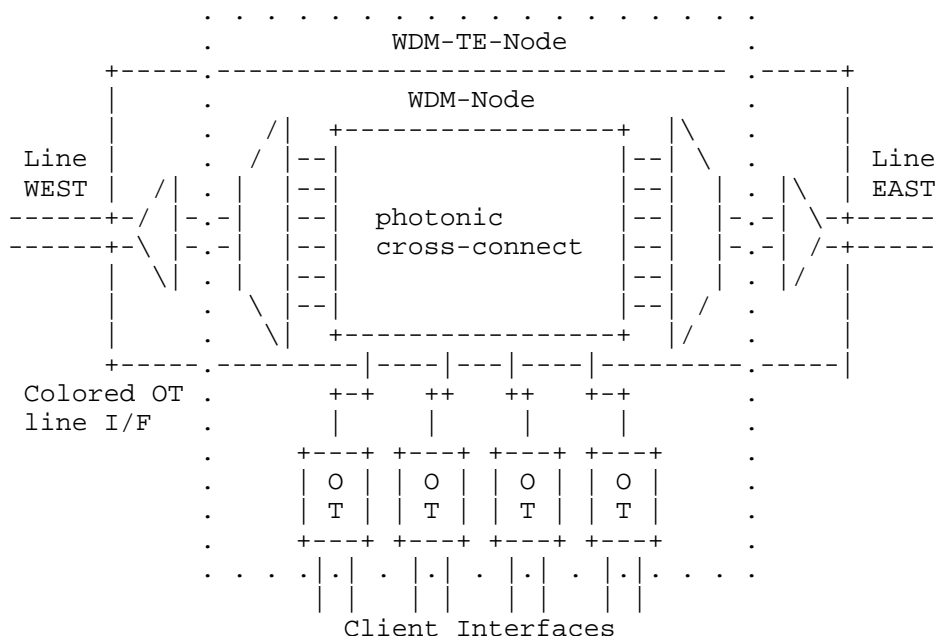


Figure 9: Integrated WDM-node Architecture with Remote Transponders

2.10.3. Disaggregated WDM-TE-node Subdivided into Degree, Add/Drop, and Optical Transponder Subsystems

Some DWDM network operators are demanding WDM subsystems from their vendors. An example is the OpenROADM project [OpenROADM] where multiple operators and vendors are developing related YANG models. The subsystems of a disaggregated WDM-TE-node are:

- * Single degree subsystems
- * Add/drop subsystems
- * Optical transponder subsystems

These subsystems are separate network elements and each network element provides a separate management and control interface. The subsystems are typically interconnected using short fiber patch cables and form together a disaggregated WDM-TE-node. This disaggregated WDM-TE-node architecture is depicted in Figure 10 below.

view.

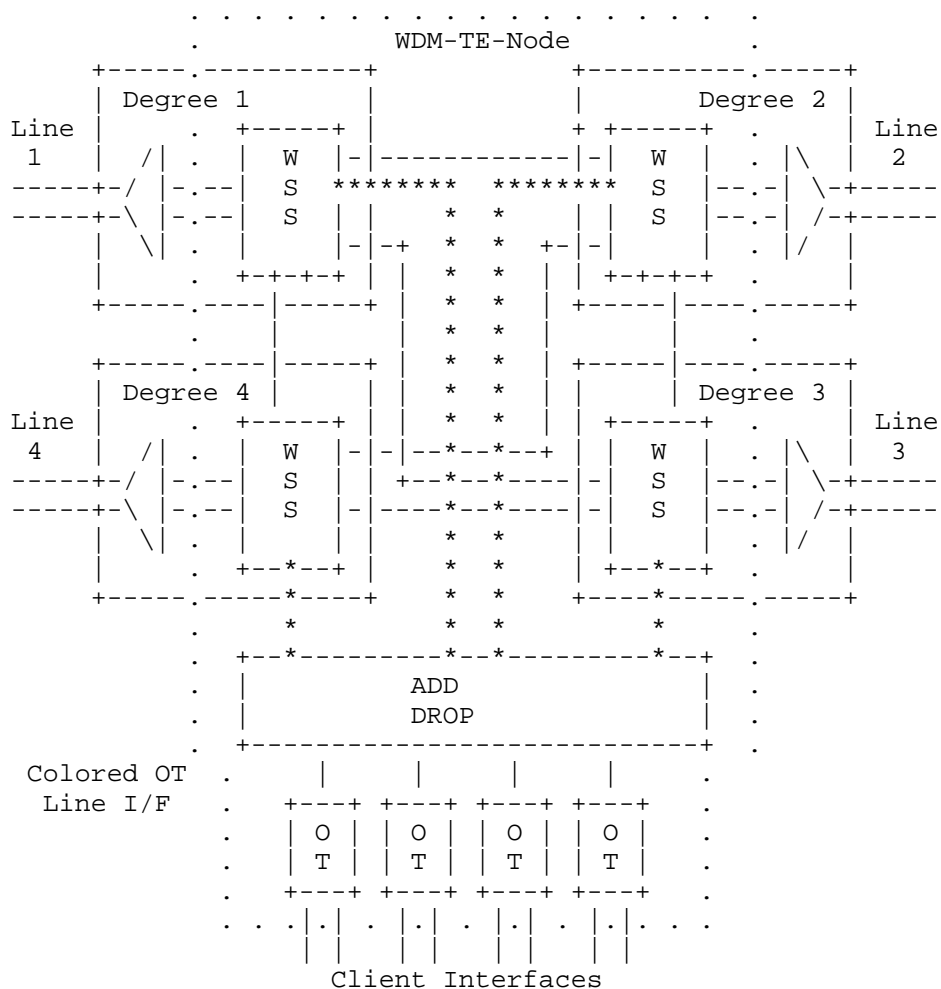


Figure 10: Disaggregated WDM-TE-node Architecture with Remote Transponders

2.10.4. Optical Impairments Imposed by WDM-TE-Nodes

When an optical OTSi signal traverses a ROADM node, optical impairments are imposed on the signal by various passive or active optical components inside the ROADM node. Examples of optical impairments are:

- * Chromatic dispersion (CD)
- * Polarization mode dispersion (PMD)
- * Polarization dependent loss (PDL)
- * Optical amplifier noise due to amplified spontaneous emission (ASE)
- * In-band cross-talk
- * Filtering effects (out of scope of this document)

A ROADM node contains a wavelength selective photonic switching function (WSS) that can switch media channels (MCs) described in Section 2.3.4. These MCs can be established between two line ports of the ROADM or between a line port and an Add/Drop port of the ROADM. The Add/Drop ports of a ROADM are those ports to which optical transponders are connected. Typically, add/drop ports are used for a single optical channel signal (single OTSi), but principally this could also be a group of OTSi signals (OTSiG). The optical impairments associated with these MCs are different and the paths of the MCs inside the ROADM node can be categorized as follows:

- * Express path: MC path between two line ports of the ROADM (unidirectional)
- * Add Path: MC path from an Add port to a line port of the ROADM
- * Drop path: MC path from a line port to a Drop port of the ROADM

Due to the symmetrical architecture of the ROADM node, the optical impairments associated with the express path are typically the same between any two line ports of the ROADM whereas the optical impairments for the add and drop paths are different and therefore MUST be modeled separately.

The optical impairments associated with each of the three types of ROADM-node-internal paths listed above are modeled as optical impairment parameter sets. These parameter sets are modeled as an augmentation of the te-node-attributes defined in [RFC8795]. The te-

node-attributes are augmented with a list of roadm-path-impairments for the three ROADM path types distinguished by the impairment-type. Each roadm-path-impairments list entry contains the set of optical impairment parameters for one of the three path types indicated by the impairment-type. For the optical feasibility calculation based on the optical impairments, it is necessary to know whether the optical power of the OTSi stays within a certain power window. This is reflected by some optical power related parameters such as loss parameters or power parameters (see also [G.680]), which are included in the optical impairment parameter sets (see tree view in Section 3).

[RFC8795] defines a connectivity matrix and a local link connectivity list for the TE node. The connectivity matrix describes the connectivity for the express paths between the different lines of the ROADM and the local link connectivity list describes the connectivity for the Add and Drop paths of the ROADM. These matrices are augmented with a new roadm-path-impairment matrix element, an add-path-impairment, and drop-path-impairment matrix element, respectively, which are defined as a pointer to the corresponding entry in the roadm-path-impairments list (leaf-ref).

2.11. Optical Protection Architectures

The YANG model defined in this document supports the following optical protection architectures:

- * Individual OTSi protection
- * OMS MCG protection = TE-link protection between adjacent WDM-TE-nodes

2.11.1. Individual OTSi Protection

Individual OTSi protection is a protection architecture where an individual OTSi signal is protected as described in Appendix III of ITU-T Recommendation G.873.1 [G.873.1]. This protection architecture requires dedicated photonic protection functions in the optical domain that are typically provided by dedicated protection hardware. These photonic protection functions are a photonic splitter function splitting the OTSi signal in transmit direction and a photonic selector function selecting the OTSi signal in receive direction from one of the two protection legs between the two protection functions terminating the individual OTSi protection. This individual OTSi protection scheme can be considered as a photonic 1+1 protection scheme (1+1 sub-network connection protection (SNCP) in ITU-T terminology).

To achieve short protection switching times, it is necessary that the OTSi signals of the two legs are identical in terms of wavelength, modulation format, FEC, etc., which means no receiver configuration changes when a protection switch at the selector occurs selecting the other leg. This is important when 3R regenerators are needed between the two end-points terminating the protected segment, which typically is end-to-end.

In case of individual OTSi protection without 3R regenerators, two end-to-end MC paths are associated with the OTSi signal. In the YANG model, this is modeled as leaf list of the otsi providing the e2e-mc-path-id for the two end-to-end MC paths associated with the individually 1+1 protected OTSi. This scenario is depicted in Figure 11 (forward direction) and Figure 12 (reverse direction) below.

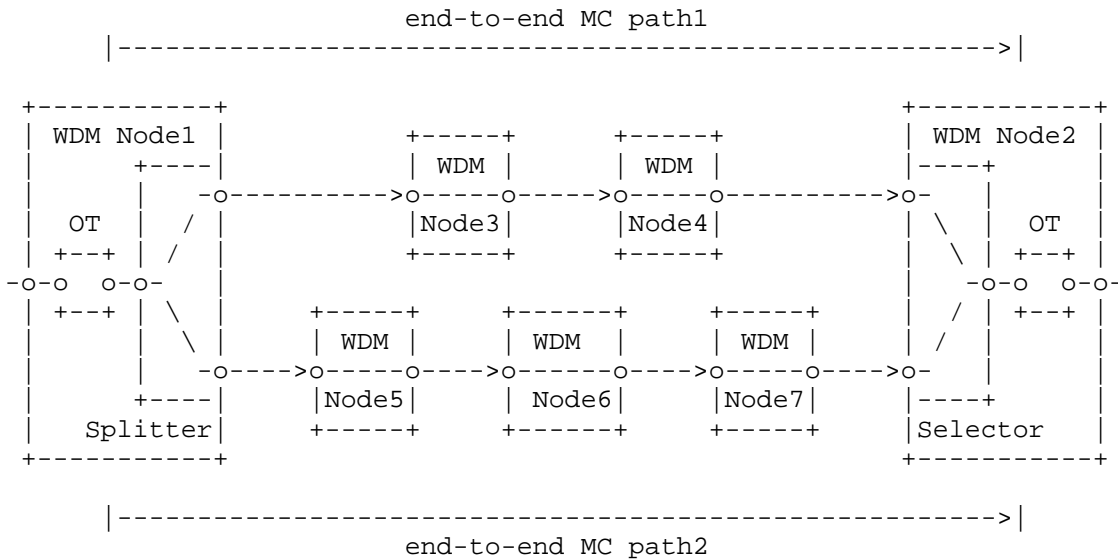


Figure 11: Individual OTSi Protection without 3R regenerators
(forward direction)

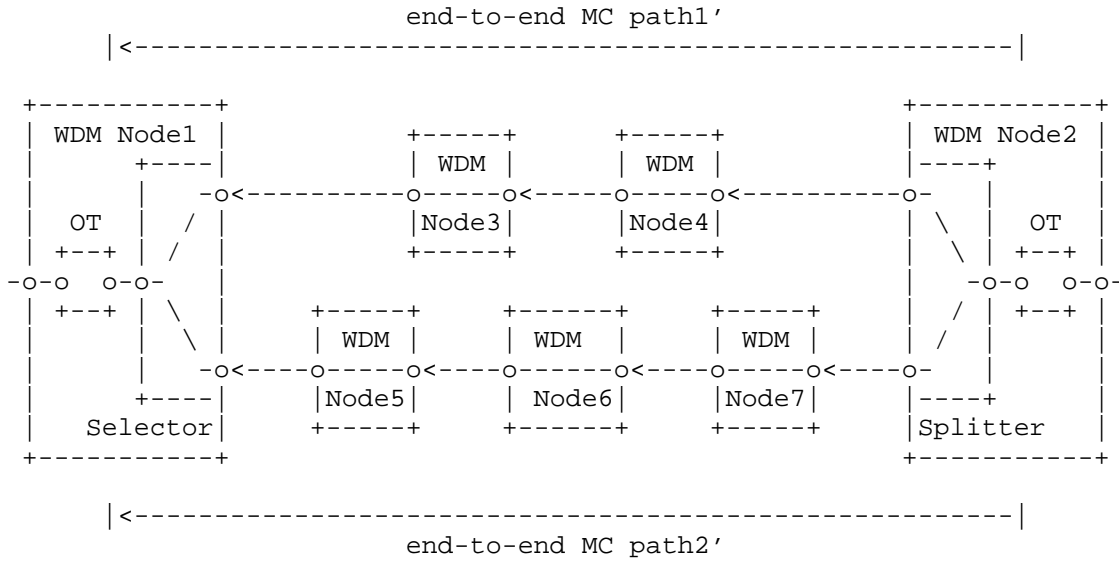


Figure 12: Individual OTSi Protection without 3R regenerators
(reverse direction)

For each OMS MCG (TE-link) along the two end-to-end MC paths in forward direction (end-to-end MC path1 and end-to-end MC path2) as well as the two end-to-end MC paths in reverse direction (end-to-end MC path1' and end-to-end MC path2'), the e2e-mc-path-id is provided for the individually protected OTSi signal. Based on this information, it is possible to construct the end-to-end MC paths between the optical transponders terminating the individually 1+1 protected OTSi.

In the scenario depicted in Figure 11 and Figure 12, the e2e-mc-path-id of end-to-end MC path1 and end-to-end MC path1' is provided for the TE-links between WDM Node1 and WDM Node3, WDM Node3 and WDM Node4 as well as WDM Node4 and WDM Node2 while the e2e-mc-path-id of end-to-end MC path2 and end-to-end MC path2' is provided for the TE-links between WDM Node1 and WDM Node5, WDM Node5 and WDM Node6, WDM Node6 and WDM Node7 as well as WDM Node7 and WDM Node2.

If a 3R regenerator is crossed on one of the two legs or even on both legs, the end-to-end MCs are terminated on both sides of the 3R regenerator. The configured-termination-type attribute set to "3r-regeneration" SHALL be used to indicate that the transceivers are forming a 3R regenerator instead of terminating the layer 0 tunnel (layer 0 service). At WDM-nodes containing a 3R regenerator, the end-to-end MCs are stitched together forming the end-to-end path for

the layer 0 tunnel (layer 0 service). This is reflected in the leaf list of the OTSi, which now lists all e2e-mc-path-ids of the end-to-end MC paths on the two legs of the individually 1+1 protected OTSi signal.

In the scenario depicted in Figure 13 and Figure 14 below where a 3R regenerator is crossed in WDM Node6 on the lower leg, the e2e-mc-path-id leaf list has 3 entries (assumption: the same e2e-mc-path-id can be used for the path in forward and reverse direction):

1. The e2e-mc-path-id identifying end-to-end MC path1 from WDM Node1 via WDM Node3 and WDM Node4 to WDM Node2 as well as end-to-end MC path1' in reverse direction (upper leg)
2. The e2e-mc-path-id identifying end-to-end MC path2 from WDM Node1 via WDM Node5 to WDM Node6 containing the 3R regenerator as well as end-to-end MC path2' in reverse direction (left hand segment of the lower leg)
3. The e2e-mc-path-id identifying end-to-end MC path3 from WDM Node6 containing the 3R regenerator via WDM Node7 to WDM Node2 as well as end-to-end MC path3' in reverse direction (right hand segment of the lower leg)

Based on this modeling approach it is possible to identify the end-to-end MCs stitched together at 3R regenerators on each of the two legs of the individually protected 1+1 OTSi signal. Like for the case without 3R regenerators is also possible to associate two end-to-end paths in forward and reverse direction for the two legs between the optical transponders terminating the individually 1+1 protected OTSi in WDM Node1 and WDM Node2, respectively:

1. end-to-end MC path1 and end-to-end MC path1' (upper leg)
2. end-to-end MC path2 and end-to-end MC path2' stitched together with end-to-end MC path3 and end-to-end MC path3' (lower leg)

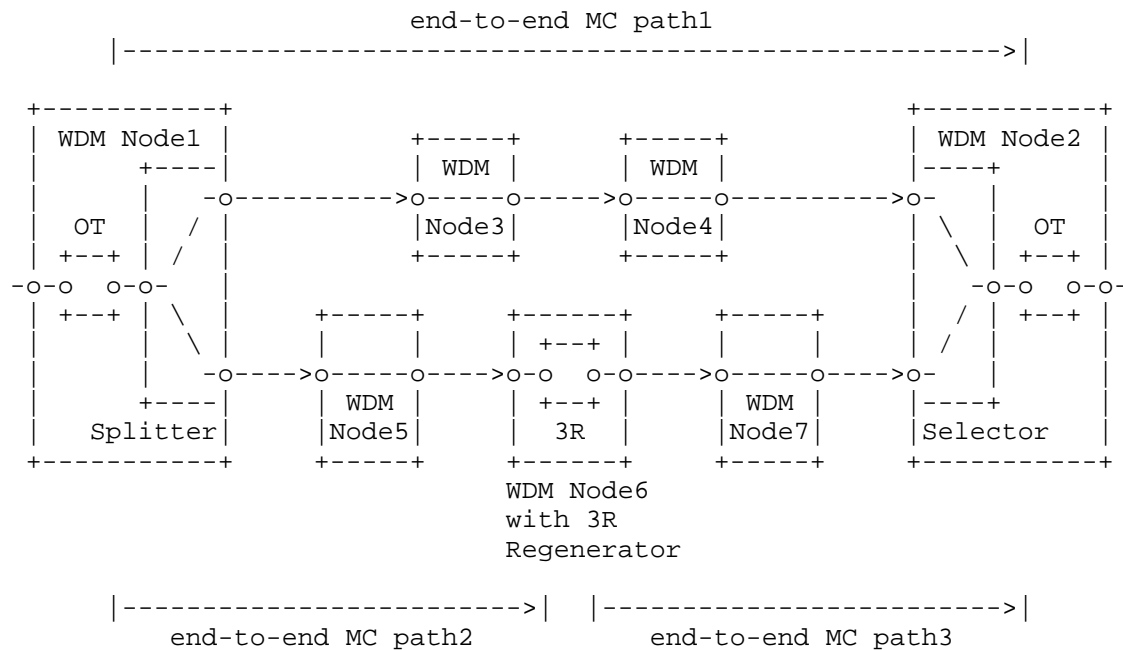


Figure 13: Individual OTSi Protection with a 3R regenerator
(forward direction)

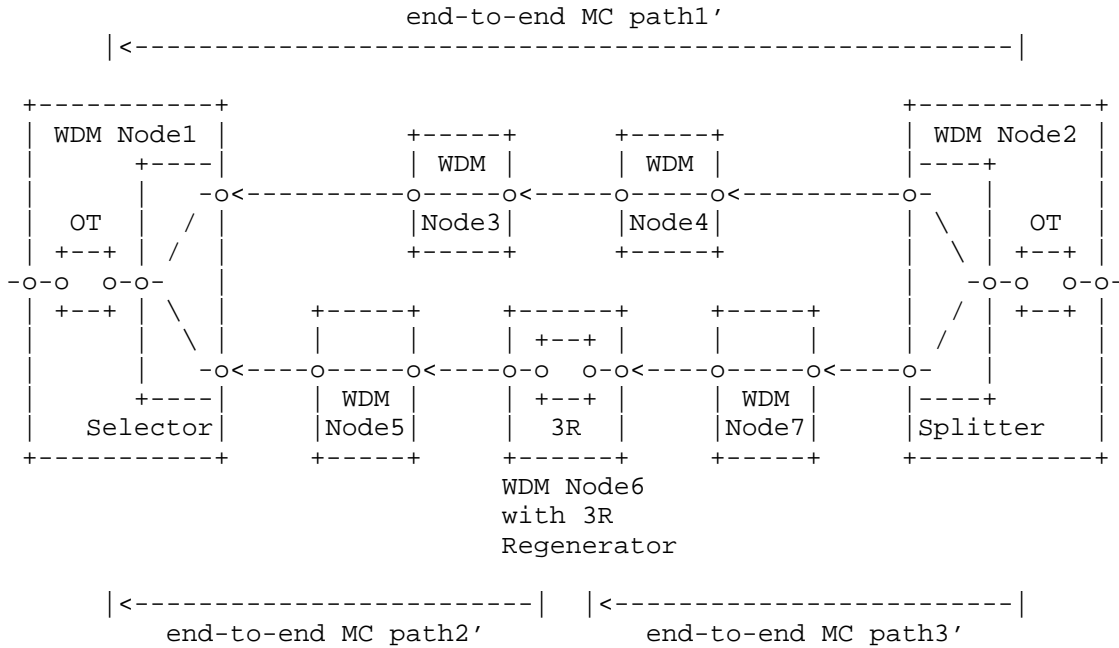


Figure 14: Individual OTSi Protection with a 3R regenerator
(reverse direction)

Individual OTSi protection use cases:

- (i) OT and OTSi protection function are an integral part of the WDM-TE-node
- (ii) OT and OTSi protection/ROADM functions are in two adjacent WDM-TE-nodes (remote OT)
- (iii) OT and OTSi protection function are both in the adjacent WDM-TE-node (protected remote OT)

The different use cases are described in following sub-sections and examples are provided how these uses cases can be modeled properly using the optical impairment-aware TE-topology YANG data model.

2.11.1.1. OT and OTSi protection function are an integral part of the WDM-TE-node

This use case is based on the architecture illustrated in Figure 8 and the following entities are all integral parts of the WDM-TE-node:

- * Local optical transponder
- * Splitter/selector protection function
- * ROADM function

Figure 15 illustrates such a WDM-TE-node configuration in transmit/forward direction where the protection function is an optical splitter and Figure 16 illustrates the same WDM-TE-node configuration in receive/reverse direction where the protection function is an optical selector selecting one of the two incoming OTSi signals and switching to the other incoming OTSi signal when the optical power of the selected OTSi signal drops below a pre-defined threshold.

The TE-topology YANG model has been augmented to describe this protection architecture. The already existing optional protection-type leaf of the TTP associated with the optical transceiver is used to indicate whether the TTP is protected, i.e., whether it is connected to a protection function or whether it is unprotected, i.e., whether it is directly connected to an add-drop port of the ROADM function in the WDM-TE-node.

For unprotected TTPs associated with an optical transceiver, the local-link-connectivity list (LLCL) describes the potential connectivity between the TTP and the LTPs of the WDM-TE-node that are the local end-points of the TE-links (OMS MCGs) interconnecting the WDM-TE-node with its neighbors, also often called degrees of the WDM-TE-node as opposed to its add-drop ports.

For protected TTPs, the local-link-connectivity list has been augmented such that the potential connectivity can now be described between the TTP and multiple LTPs including the related optical impairments. Without this new capability, it was only possible to describe the potential connectivity between a TTP and a single LTP (unprotected case). If the optical impairments are the same for all local-link-connectivity list entries for a particular TTP, which is usually the case, the optical impairments should be omitted for the additional LTPs leading to a more compact topology description. If the optical impairments are different, however, they can be described for each additional LTP entry separately.

A local-link-connectivity list example for a protected TTP in JSON format is provided in Appendix A.

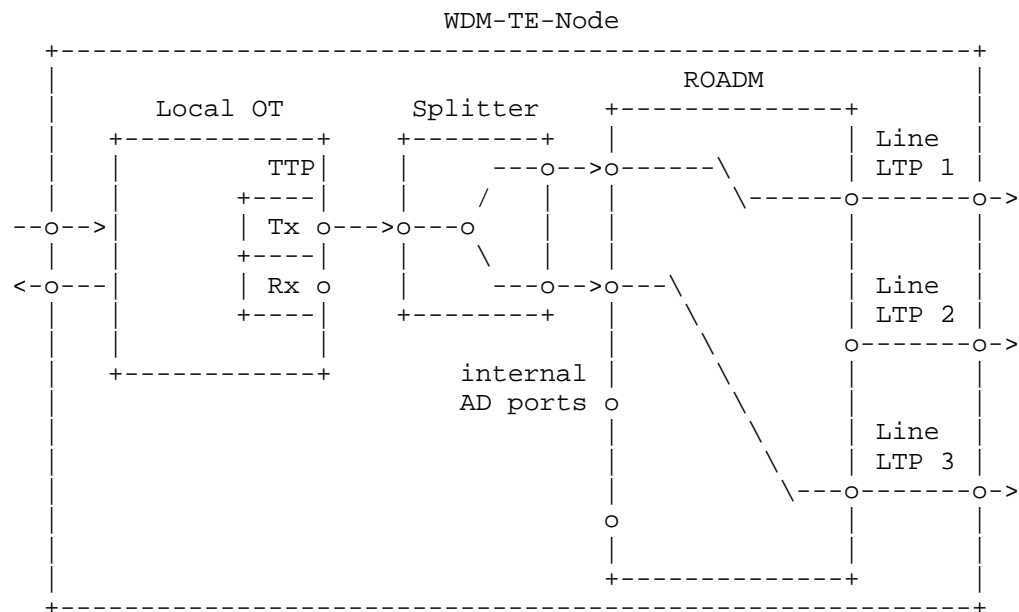


Figure 15: OT and OTSi protection function are an integral part of the WDM-TE- node (transmit direction)

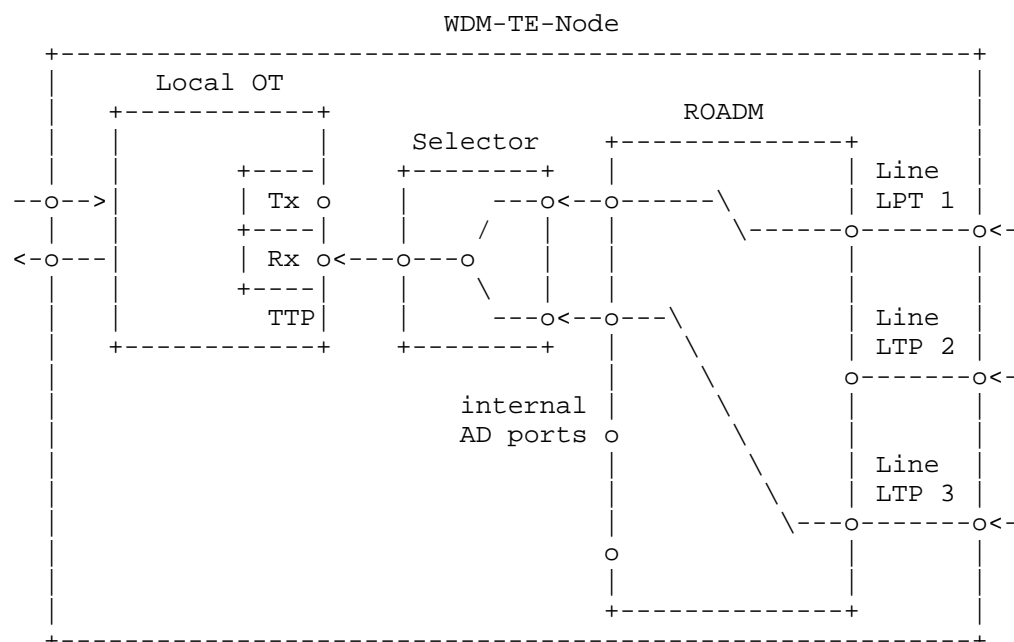


Figure 16: OT and OTSi protection function are an integral part of the WDM-TE- node (receive direction)

2.11.1.2. OT and OTSi protection/ROADM functions are in two adjacent WDM-TE-node (remote OT)

This use case is based on the architecture illustrated in Figure 9 where the optical transponder is not part of the WDM-TE-node containing the ROADM function (WDM-TE-Node-2) but is part of a separate WDM-TE-node (WDM-TE-Node-1) containing one or more optical transponders (remote OTs). WDM-TE-Node-2 contains:

- * Splitter/selector protection function
- * ROADM function

Figure 17 illustrates such a network configuration in transmit/forward direction showing the two WDM-TE-nodes where the protection function is the optical splitter in WDM-TE-Node-2 and Figure 18 illustrates the same network configuration in receive/reverse direction where the protection function is the optical selector in WDM-TE-Node-2 selecting one of the two incoming OTSi signals and switching to the other incoming OTSi signal when the optical power of the selected OTSi signal drops below a pre-defined threshold.

In the network configuration shown in Figure 17 and Figure 18, respectively, the two WDM-TE-nodes are interconnected via a TE-link carrying a single OTSi signal. This TE-link interconnects the remote OT with an add-drop port of WDM-TE-Node-2 and in the following the qualifier "add-drop" is used to refer to that LTP as opposed to the line LTPs representing degrees of WDM-TE-Node-2. Like for the protected TTP in Section 2.11.1.1, the optional protection-type leaf is used to indicate whether the add-drop LTP is connected to a protection function and then to two line LTPs via the ROADM function inside WDM-TE-Node-2 or whether it is connected to a single line LTP via the ROADM function inside WDM-TE-Node-2 (unprotected add-drop LTP). While the protection-type attribute was already defined for the TTP, the YANG model has been augmented to also support this optional attribute for the LTP.

For protected LTPs, the connectivity-matrix has been augmented such that the potential connectivity can now be described between an add-drop LTP and multiple line LTPs including the related optical impairments. Without this new capability, it was only possible to describe the potential connectivity between an add-drop LTP and a single line LTP (unprotected case). If the optical impairments are the same from the protected ad-drop LTP to all line LTPs, which is usually the case, the optical impairments should be omitted for the additional LTPs leading to a more compact connectivity matrix description. If the optical impairments are different, however, they can be described for each additional LTP separately.

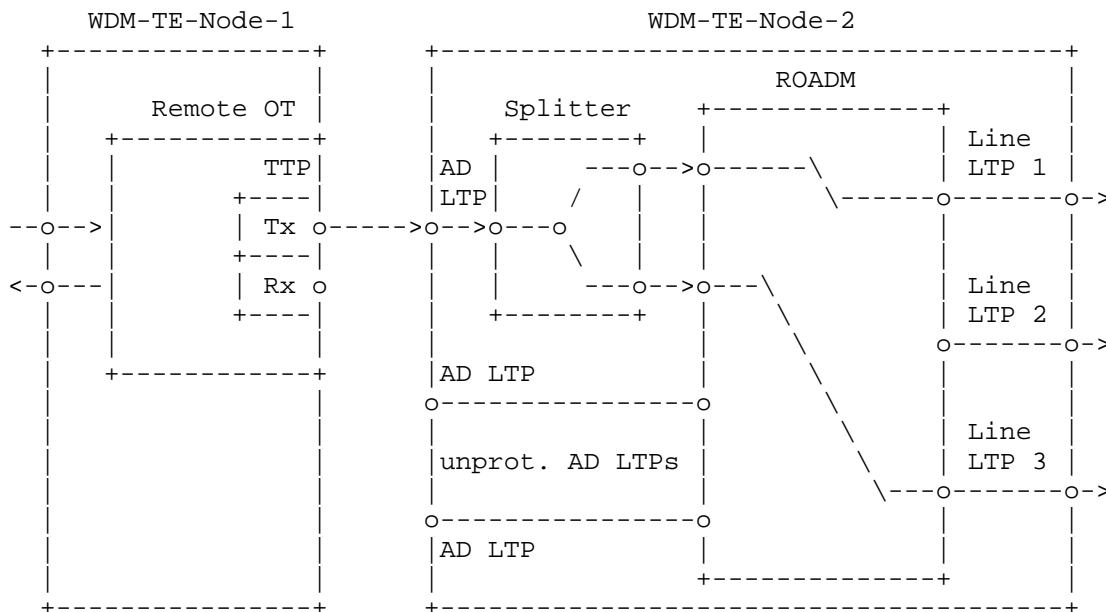


Figure 17: OT and OTSi protection/ROADM functions are in two adjacent WDM-TE- node (remote OT, transmit direction)

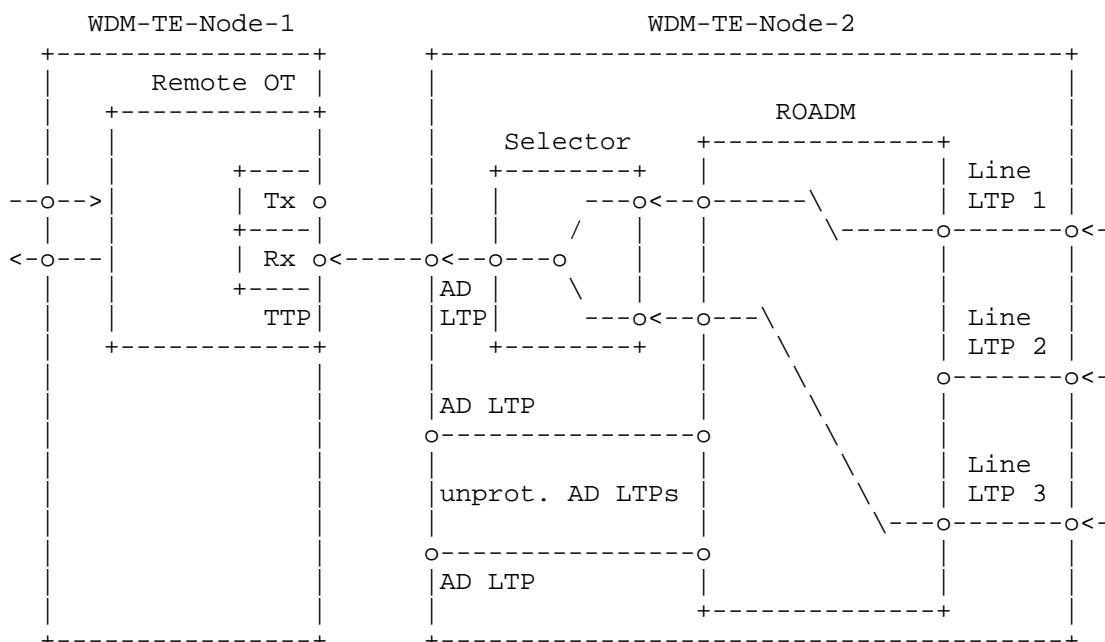


Figure 18: OT and OTSi protection/ROADM functions are in two adjacent WDM-TE- node (remote OT, receive direction)

2.11.1.3. OT and protection function are both in an adjacent WDM-TE- node (protected remote OT)

The use case illustrated in Figure 19 is similar to the use case in Section 2.11.1.1. The difference compared to use case (i) is that WDM-TE-Node-1 does not contain the ROADM function but contains:

- * Optical transponder function including the transceiver
- * Splitter/selector protection function

WDM-TE-Node-1 can be a data center device or a router device that is supporting 1+1 OTSi protection for its OTs while WDM-TE-Node-2 is a WDM-TE-node providing add-drop ports for remote OTs as depicted in Figure 9. WDM-TE-Node-1 and WDM-TE-Node-2 are interconnected via two separate TE-links, each carrying a single OTSi signal. The protection configuration for the protected TTP in WDM-TE-Node-1 can be described in the same way as for use case (i) using the local-link-connectivity list.

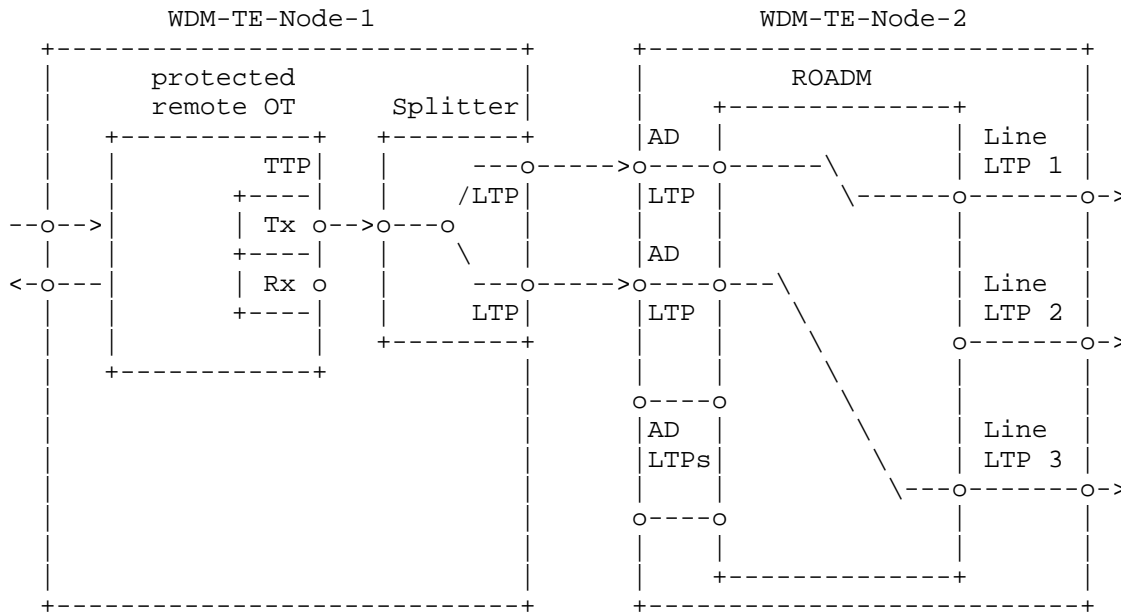


Figure 19: OT and OTSI protection function are both in an adjacent WDM-TE-node (protected remote OT, transmit direction)

2.11.2. OMS MCG protection

OMS MCG protection is a 1+1 protection architecture where a TE-link representing an OMS MCG between two adjacent WDM-TE-nodes is 1+1 protected. This media layer protection type is also described in Appendix III of [G.873.1_Amd1]. Figure 20 illustrates this 1+1 OMS MCG protection type and shows a 1+1 protected TE-link together with an unprotected TE-link between the same two adjacent WDM-TE-Nodes. The protected TE-link in Figure 20 is composed of an underlying primary and secondary TE-link. This modeling approach is described below.

1+1 OMS MCG protection is a local protection scheme, which can be modeled based on TE-link properties already defined in [RFC8795]. The 1+1 protected TE-link is associated with the two underlying TE-links representing the physical links, which are forming the 1+1 protection group together with the splitter and selector functions in the adjacent WDM-TE-Nodes as depicted in Figure 20. This modeling approach is described in more detail in Section 2.11.2.1.

Alternatively, it is possible to model the 1+1 OMS MCG protection as single protected TE-link abstracting the two underlying physical links as well as the splitter and selector functions in the two adjacent WDM-TE-Nodes. This modeling approach is described in more detail in Section 2.11.2.2.

For both modeling approaches, the splitter and selector functions are not represented as separate entities in the model. Their optical impairments can be included in the optical impairments of the ROADM paths in the two adjacent WDM-TE-Nodes (connectivity matrix and LLCL, respectively) or in the optical impairments of the 1+1 protected TE-link abstracting the two underlying physical OMS links.

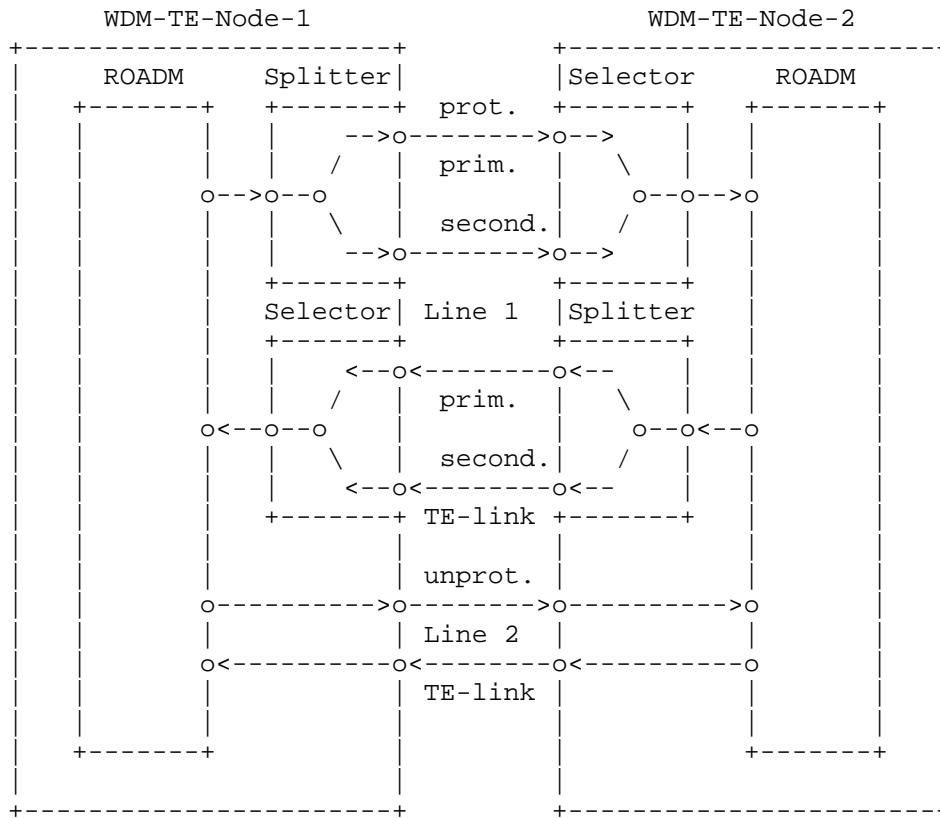


Figure 20: Two WDM-TE-Nodes with a protected and an unprotected OMS MCG (TE-link)

2.11.2.1. OMS MCG Protection Modeled as Protected TE-link with underlying TE-links

This modeling approach models the 1+1 protected TE-link as an additional TE-link entity on top of the primary and secondary TE-link between the two adjacent WDM-TE-Nodes terminating the 1+1 OMS MCG protection group formed by these two TE-links and the splitter and selector functions in the two nodes. This 1+1 protected TE-link is associated with underlying primary and secondary TE-links forming the 1+1 protection group. The following "te-link-attributes" already defined in [RFC8795] and [I-D.ietf-teas-rfc8776-update] can be used for modeling the 1+1 protected TE-link ("te-link-attributes" augmentation copied from [RFC8795]):

```
augment /nw:networks/nw:network/nt:link:
  +--rw te!
    +--rw te-link-attributes
      | .....
      | +--rw underlay {te-topology-hierarchy}?
      | | +--rw enabled?                               boolean
      | | +--rw primary-path
      | | | +--rw network-ref?   leafref
      | | | .....
      | | +--rw backup-path* [index]
      | | | +--rw index           uint32
      | | | +--rw network-ref?   leafref
      | | | .....
      | | .....
      | +--rw link-protection-type?   identityref
      | .....
      | .....
```

These attributes are used as follows:

- * "underlay": the presence of this container indicates that an underlying protection scheme exists
- * "enabled": (boolean) is set to 'true'
- * "primary-path": is referencing the primary OMS MCG (TE-link)
- * "backup-path": is referencing the secondary OMS MCG (TE-link)
- * "link-protection-type" (identityref) set to 'link-protection-1-plus-1' as defined in [I-D.ietf-teas-rfc8776-update]

The optical impairments for the underlying primary and secondary TE-link can be described as for unprotected TE-links. It MAY also be possible to only describe the optical impairments for the 1+1 protected TE-link. In this case the optical impairments of the worse of the two underlying TE-links shall be used. This should be sufficient as input for path computation (worst case optical feasibility consideration).

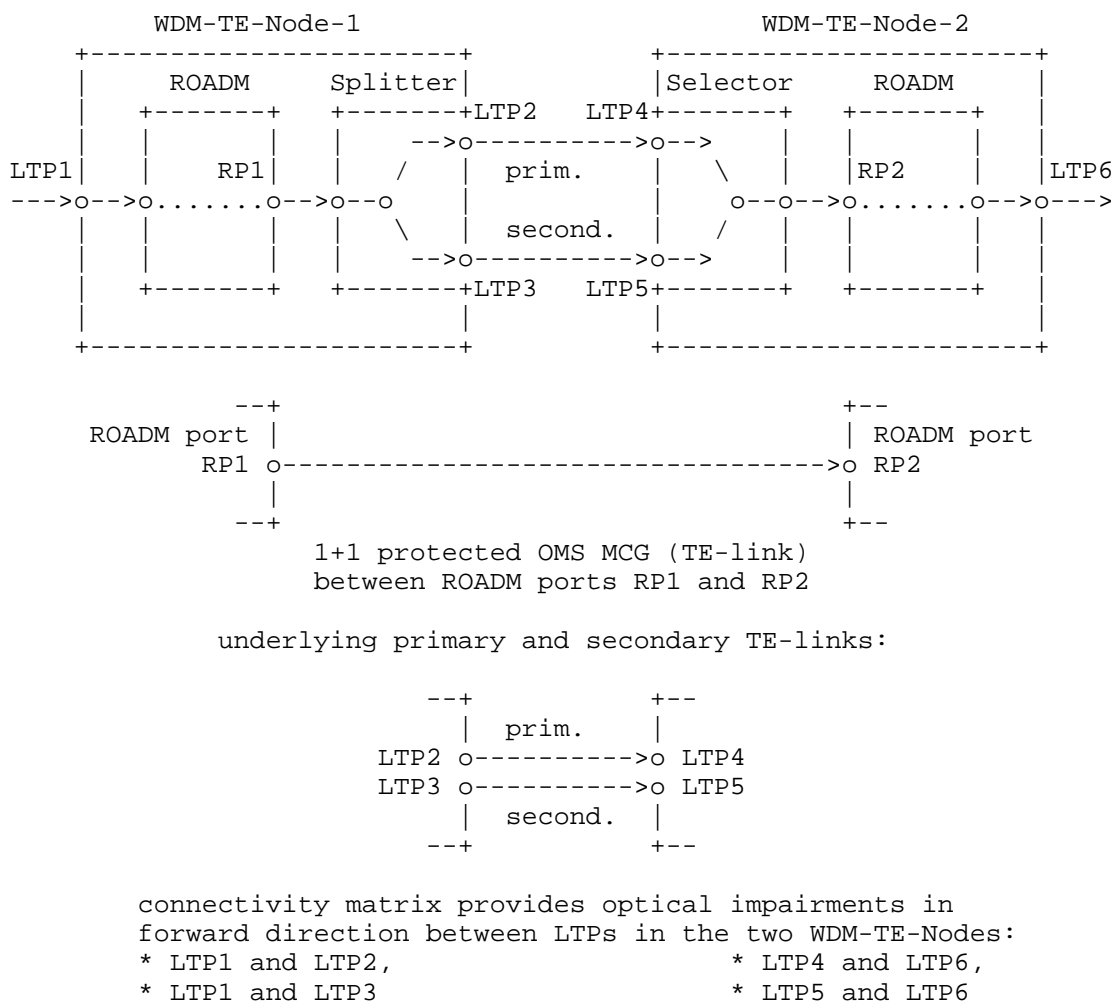


Figure 21: Modeling view of 1+1 protected TE-link with underlying primary and secondary TE-link (forward direction)

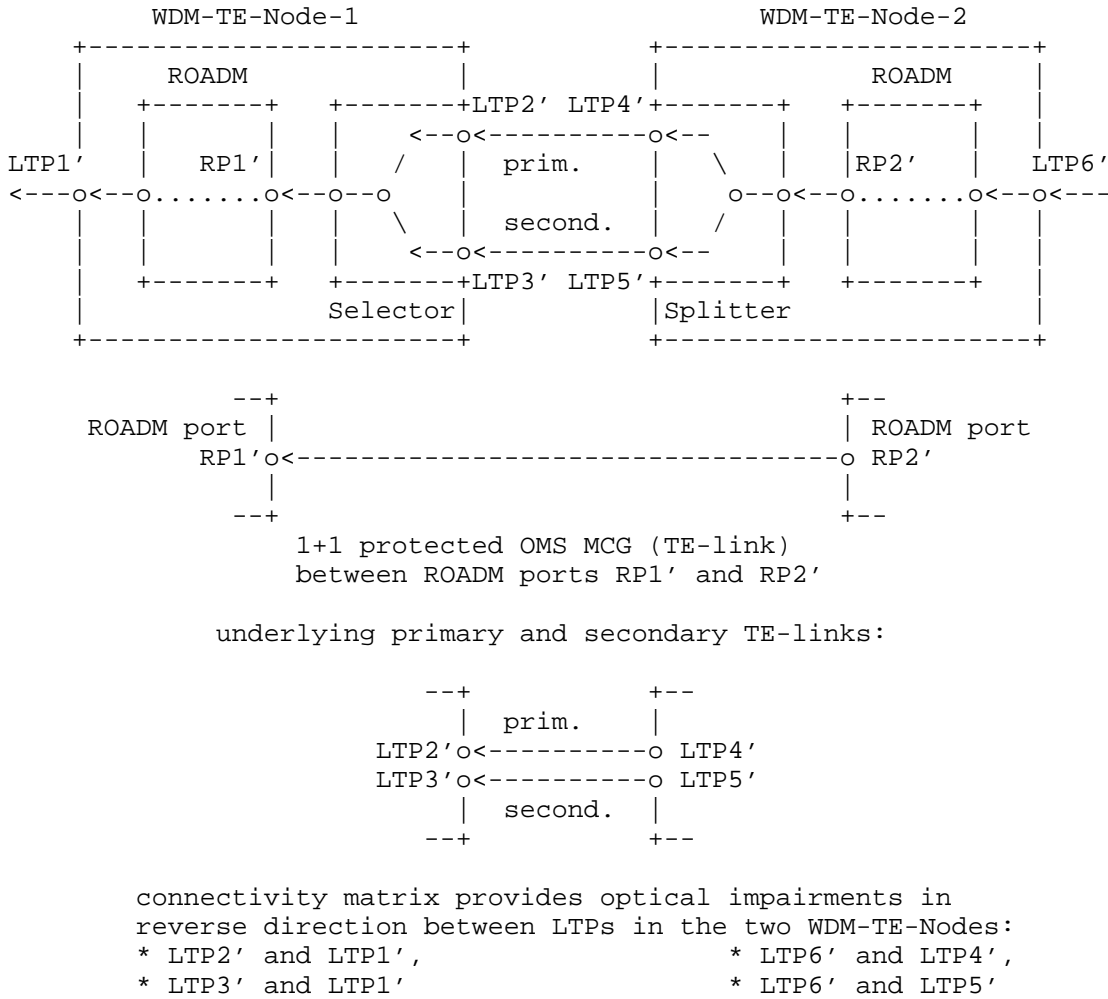


Figure 22: Modeling view of 1+1 protected TE-link with underlying primary and secondary TE-link (reverse direction)

Figure 21 and Figure 22 illustrate this modeling approach including the LTPs in WDM-TE-Node-1 and WDM-TE-Node-2, respectively. In addition to the physical view, the following TE-links are shown in the two directions:

- * The 1+1 protected TE-link
- * The underlying primary TE-link
- * The underlying secondary TE-link

The optical impairments of the splitter (outgoing direction) and the selector (incoming direction) are included in the optical impairments described by the connectivity matrix and the local link connectivity list for the TE node. For the example shown in Figure 21 in forward direction, the connectivity matrix describes the optical impairments between LPT1 and LTP2 as well as LTP1 and LTP3 for WDM-TE-Node-1. Likewise, the connectivity matrix describes the optical impairments between LPT4 and LTP6 as well as LTP5 and LTP6 in WDM-TE-Node-2. The same applies to the corresponding LTPs in reverse direction.

2.11.2.2. OMS MCG Protection Modeled as Single Protected TE-link

This modeling approach abstracts the two physical OMS links carrying the same OMS MCG together with the splitter and selector functions in the two WDM-TE-Nodes forming the OMS protection group into a single TE-link. When this modeling approach is used the "te-link-attributes" already defined in [RFC8795] and [I-D.ietf-teas-rfc8776-update] are used as follows:

```
augment /nw:networks/nw:network/nt:link:
  +--rw te!
    +--rw te-link-attributes
      | .....
      | +--rw link-protection-type?          identityref
      | .....
      |
```

- * "underlay": this container MUST NOT be present
- * "link-protection-type" (identityref) set to 'link-protection-1-plus-1' as defined in [I-D.ietf-teas-rfc8776-update]

The optical impairments exposed for this 1+1 protected TE-link are typically based on the optical impairments of the worse of the two underlying physical OMS links including the optical impairments imposed by the splitter (outgoing direction) and selector (incoming direction).

Figure 23 and Figure 24 illustrate this modeling approach where the splitter/selector in the adjacent WDM-TE-Nodes, WDM-TE-Node-1 and WDM-TE-Node-2, as well as the two physical OMS MCG links are abstracted into a single 1+1 protected TE-link. This is illustrated by the dotted line surrounding these four physical entities in Figure 23 and Figure 24, respectively. Based on this modeling approach, the ROADM port connected to the splitter/selector function is modeled as LTP for the 1+1 protected TE-link (LTP2 in WDM-TE-Node-1 and LTP3 in WDM-TE-Node-2). In this example, the connectivity matrix describes the optical impairments between LPT1 and LTP2 in WDM-TE-Node-1. Likewise, the connectivity matrix describes the optical impairments between LPT3 and LTP4 in WDM-TE-Node-2.

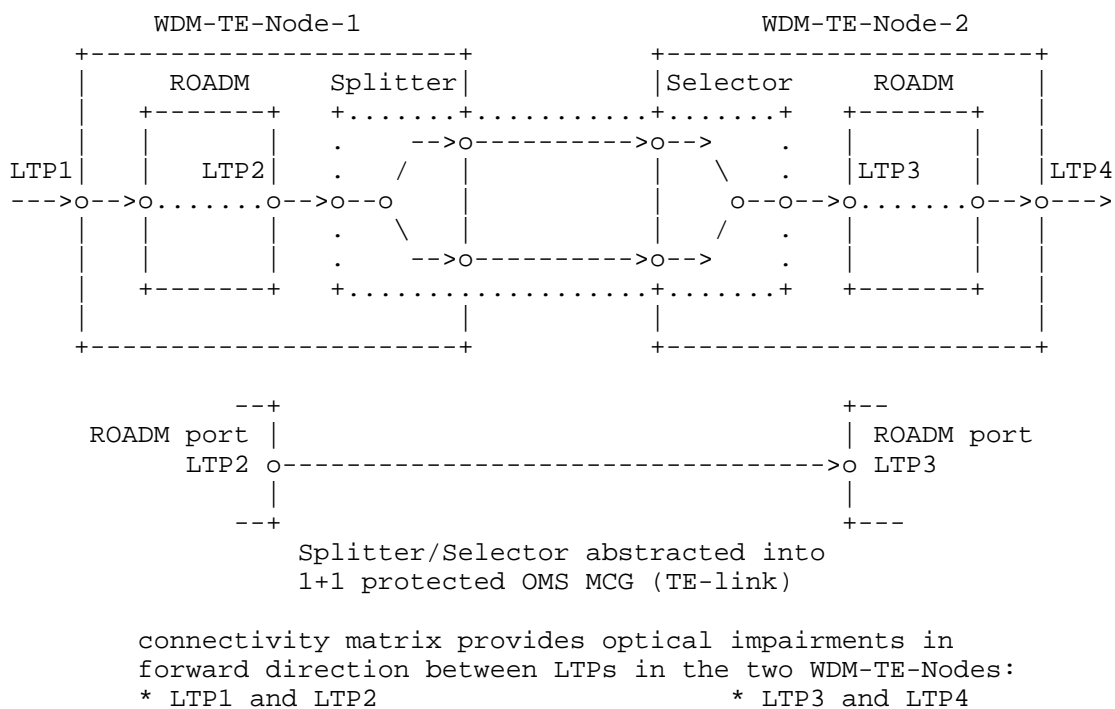


Figure 23: Modeling view of abstracted 1+1 protected TE-link (forward direction) - ROADM ports modeled as LTPs


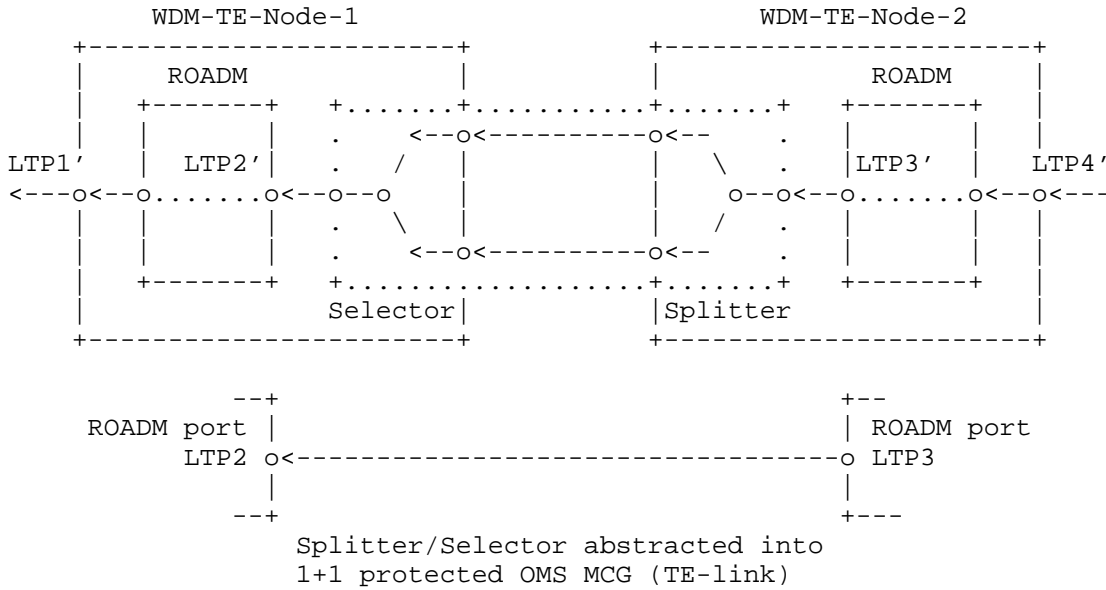


Figure 24: Modeling view of abstracted 1+1 protected TE-link
(reverse direction) - ROADM ports modeled as LTPs

Alternatively, the optical impairments imposed by the splitter and selector in each of the two adjacent WDM-TE-Nodes can also be included in the optical impairments described by the connectivity matrix of the two nodes instead of taking them into account as optical impairments of the 1+1 protected TE-link. This is illustrated in Figure 25 in forward direction and Figure 26 in reverse direction below. In this case, the two physical ports on both ends of the 1+1 protected TE-link are abstracted into a single LTP, LTP2 and LTP3, in forward direction and LTP3' and LTP2' in reverse direction.

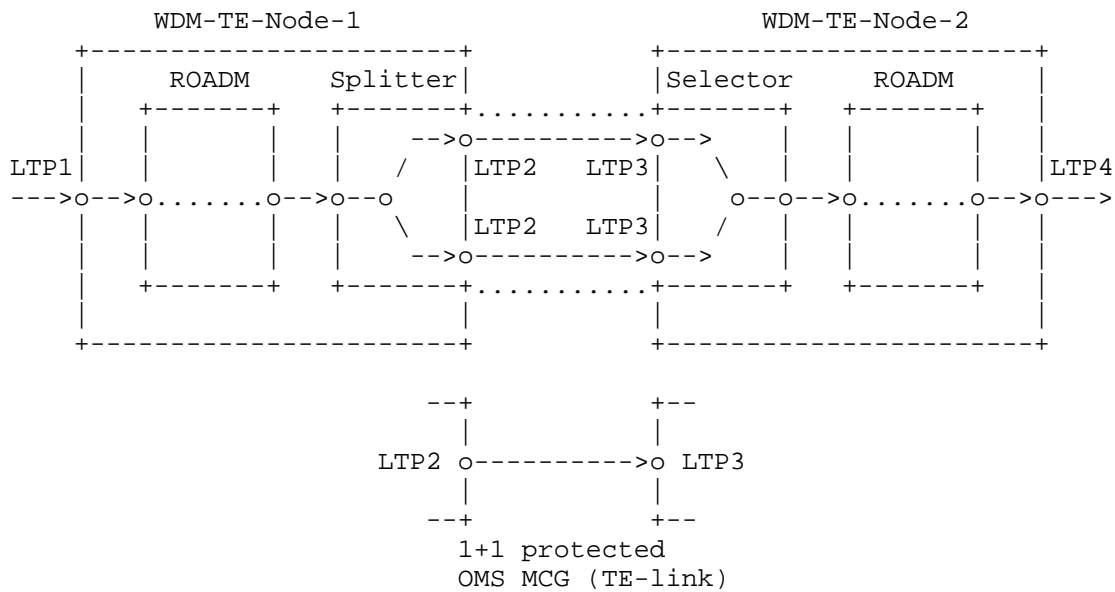

connectivity matrix provides optical impairments in forward direction between LTPs in the two WDM-TE-Nodes:

* LTP1 and LTP2

* LTP3 and LTP4

Figure 25: Modeling view of abstracted 1+1 protected TE-link (forward direction) - physical ports abstracted into single LTP on both link ends




Figure 26: Modeling view of abstracted 1+1 protected TE-link (reverse direction) - physical ports abstracted into single LTP on both link ends

3. YANG Model (Tree Structure)

```

module: ietf-optical-impairment-topology

augment /nw:networks/nw:network/nw:network-types/tet:te-topology:
  +--rw optical-impairment-topology!
augment /nw:networks/nw:network:
  +--ro otsis!
  |   +--ro otsi-group* [otsi-group-id]
  |   |   +--ro otsi-group-id      string
  |   |   +--ro otsi* [carrier-id]
  |   |   |   +--ro carrier-id      uint16
  |   |   |   +--ro carrier-frequency? union
  |   |   |   +--ro e2e-mc-path-id* uint16
  +--ro templates
  |   +--ro roadm-path-impairments-sets
  |   |   +--ro roadm-path-impairments-set*
  |   |   |   [roadm-path-impairments-set-id]

```

```

+--ro roadm-path-impairments-set-id    string
+--ro description?                     string
+--ro (impairment-type)?
  +--:(roadm-express-path)
    +--ro roadm-express-path* [frequency-range-id]
      +--ro frequency-range-id          uint16
      +--ro frequency-range
        | +--ro lower-frequency          frequency-thz
        | +--ro upper-frequency          frequency-thz
      +--ro roadm-pmd?                   union
      +--ro roadm-cd?
        | 10-types:decimal-5-or-unknown
      +--ro roadm-pdl?
        | 10-types:power-loss-or-unknown
      +--ro roadm-inband-crosstalk?
        | 10-types:decimal-2-or-unknown
      +--ro roadm-maxloss?
        | 10-types:power-loss-or-unknown
  +--:(roadm-add-path)
    +--ro roadm-add-path* [frequency-range-id]
      +--ro frequency-range-id          uint16
      +--ro frequency-range
        | +--ro lower-frequency          frequency-thz
        | +--ro upper-frequency          frequency-thz
      +--ro roadm-pmd?                   union
      +--ro roadm-cd?
        | 10-types:decimal-5-or-unknown
      +--ro roadm-pdl?
        | 10-types:power-loss-or-unknown
      +--ro roadm-inband-crosstalk?
        | 10-types:decimal-2-or-unknown
      +--ro roadm-maxloss?
        | 10-types:power-loss-or-unknown
      +--ro roadm-pmax?
        | 10-types:power-dbm-or-unknown
      +--ro roadm-osnr?
        | 10-types:snr-or-unknown
      +--ro roadm-noise-figure?
        | 10-types:decimal-5-or-unknown
  +--:(roadm-drop-path)
    +--ro roadm-drop-path* [frequency-range-id]
      +--ro frequency-range-id          uint16
      +--ro frequency-range
        | +--ro lower-frequency          frequency-thz
        | +--ro upper-frequency          frequency-thz
      +--ro roadm-pmd?                   union
      +--ro roadm-cd?
        | 10-types:decimal-5-or-unknown

```

```

|         +--ro roadm-pdl?
|         |         10-types:power-loss-or-unknown
+--ro roadm-inband-crosstalk?
|         10-types:decimal-2-or-unknown
+--ro roadm-maxloss?
|         10-types:power-loss-or-unknown
+--ro roadm-minloss?
|         10-types:power-loss-or-unknown
+--ro roadm-typloss?
|         10-types:power-loss-or-unknown
+--ro roadm-pmin?
|         10-types:power-dbm-or-unknown
+--ro roadm-pmax?
|         10-types:power-dbm-or-unknown
+--ro roadm-ptyp?
|         10-types:power-dbm-or-unknown
+--ro roadm-osnr?
|         10-types:snr-or-unknown
+--ro roadm-noise-figure?
|         10-types:decimal-5-or-unknown
+--ro explicit-transceiver-modes
  +--ro explicit-transceiver-mode*
    [explicit-transceiver-mode-id]
    +--ro explicit-transceiver-mode-id      string
    +--ro line-coding-bitrate?              identityref
    +--ro bitrate?                          uint16
    +--ro max-diff-group-delay?              decimal-2
    +--ro max-chromatic-dispersion?          decimal-2
    +--ro cd-penalty* [cd-value]
    |   +--ro cd-value          decimal-2
    |   +--ro penalty-value     union
    +--ro max-polarization-mode-dispersion? decimal-2
    +--ro pmd-penalty* [pmd-value]
    |   +--ro pmd-value          decimal-2
    |   +--ro penalty-value     union
    +--ro max-polarization-dependent-loss
    |   power-loss-or-unknown
    +--ro pdl-penalty* [pdl-value]
    |   +--ro pdl-value          power-loss
    |   +--ro penalty-value     union
    +--ro available-modulation-type?         identityref
    +--ro min-OSNR?                          snr
    +--ro rx-ref-channel-power?              power-dbm
    +--ro rx-channel-power-penalty* [rx-channel-power-value]
    |   +--ro rx-channel-power-value power-dbm
    |   +--ro penalty-value         union
    +--ro min-Q-factor?                      decimal-2
    +--ro available-baud-rate?               decimal64

```

```

        +--ro roll-off?                               decimal64
        +--ro min-carrier-spacing?                     frequency-ghz
        +--ro available-fec-type?                      identityref
        +--ro fec-code-rate?                           decimal64
        +--ro fec-threshold?                           decimal64
        +--ro in-band-osnr?                             snr
        +--ro out-of-band-osnr?                         snr
        +--ro tx-polarization-power-difference?        power-ratio
        +--ro polarization-skew?                       decimal-2
augment /nw:networks/nw:network/nw:node:
  +--ro transponders!
    +--ro transponder* [transponder-id]
      +--ro transponder-id                             uint32
      +--ro termination-type-capabilities?             enumeration
      +--ro supported-3r-mode?                         enumeration
      +--ro transceiver* [transceiver-id]
        +--ro transceiver-id                           uint32
        +--ro supported-modes!
          +--ro supported-mode* [mode-id]
            +--ro mode-id                               string
            +--ro (mode)
              +--:(g.698.2)
                +--ro g.698.2
                  +--ro standard-mode
                    | standard-mode
                  +--ro line-coding-bitrate*
                    | identityref
                  +--ro transceiver-tuning-range
                    | +--ro min-central-frequency?
                    | | frequency-thz
                    | +--ro max-central-frequency?
                    | | frequency-thz
                    | +--ro transceiver-tunability-granular\
                    | frequency-ghz
                    +--ro tx-channel-power-min?
                    | power-dbm
                    +--ro tx-channel-power-max?
                    | power-dbm
                    +--ro rx-channel-power-min?
                    | power-dbm
                    +--ro rx-channel-power-max?
                    | power-dbm
                    +--ro rx-total-power-max?
                    | power-dbm
                  +--:(organizational-mode)
                    +--ro organizational-mode
                    +--ro operational-mode

```


			<pre> operational-mode +--ro organization-identifier organization-identifier +--ro line-coding-bitrate* identityref +--ro transceiver-tuning-range +--ro min-central-frequency? frequency-thz +--ro max-central-frequency? frequency-thz +--ro transceiver-tunability-granular\ </pre>
ity?			<pre> frequency-ghz +--ro tx-channel-power-min? power-dbm +--ro tx-channel-power-max? power-dbm +--ro rx-channel-power-min? power-dbm +--ro rx-channel-power-max? power-dbm +--ro rx-total-power-max? power-dbm +--:(explicit-mode) +--ro explicit-mode +--ro transceiver-tuning-range +--ro min-central-frequency? frequency-thz +--ro max-central-frequency? frequency-thz +--ro transceiver-tunability-granular\ </pre>
ity?			<pre> frequency-ghz +--ro tx-channel-power-min? power-dbm +--ro tx-channel-power-max? power-dbm +--ro rx-channel-power-min? power-dbm +--ro rx-channel-power-max? power-dbm +--ro rx-total-power-max? power-dbm +--ro compatible-modes +--ro supported-application-code* leafref +--ro supported-organizational-mode* leafref </pre>

```

|         |         +--ro explicit-transceiver-mode-ref?
|         |         leafref
|         +--ro configured-mode?          union
|         +--ro line-coding-bitrate?      identityref
|         +--ro tx-channel-power?
|         |         power-dbm-or-unknown
|         +--ro rx-channel-power?
|         |         power-dbm-or-unknown
|         +--ro rx-total-power?
|         |         power-dbm-or-unknown
|         +--ro outgoing-otsi
|         |         +--ro otsi-group-ref?  leafref
|         |         +--ro otsi-ref?       leafref
|         +--ro incoming-otsi
|         |         +--ro otsi-group-ref?  leafref
|         |         +--ro otsi-ref?       leafref
|         +--ro configured-termination-type?  enumeration
+--ro regen-groups!
  +--ro regen-group* [group-id]
    +--ro group-id      uint32
    +--ro regen-metric? uint32
    +--ro transponder-ref*
      -> ../../../../transponders/transponder/transponder-id
augment /nw:networks/nw:network/nt:link/tet:te
  /tet:te-link-attributes:
+--ro oms-attributes
  +--ro generalized-snr?      10-types:snr
  +--ro equalization-mode?    identityref
  +--ro power-param
  |   +--ro nominal-carrier-power?
  |   |   10-types:power-dbm-or-unknown
  |   +--ro nominal-psd?      10-types:psd-or-unknown
+--ro media-channel-groups!
  +--ro media-channel-group* [otsi-group-ref]
  |   +--ro otsi-group-ref  leafref
  |   +--ro media-channel* [media-channel-id]
  |   |   +--ro media-channel-id  int16
  |   |   +--ro flexi-n?          flexi-n
  |   |   +--ro flexi-m?          flexi-m
  |   |   +--ro otsi-ref* [carrier-ref]
  |   |   |   +--ro carrier-ref  leafref
  |   |   |   +--ro e2e-mc-path-ref*  leafref
  |   |   +--ro delta-power?
  |   |   |   10-types:power-ratio-or-unknown
+--ro oms-elements!
  +--ro oms-element* [elt-index]
  |   +--ro elt-index      uint16
  |   +--ro oms-element-uid?  union

```

```

+--ro reverse-element-ref
|   +--ro link-ref?
|   |   -> ../../../../../../../nt:link/link-id
|   +--ro oms-element-ref*   leafref
+--ro (element)
+--:(amplifier)
|   +--ro geolocation
|   |   +--ro altitude?       int64
|   |   +--ro latitude?      geographic-coordinate-degree
|   |   +--ro longitude?     geographic-coordinate-degree
|   +--ro amplifier
|   |   +--ro type-variety    string
|   |   +--ro operational
|   |   |   +--ro amplifier-element*
|   |   |   |   [frequency-range-id stage-order]
|   |   |   |   +--ro frequency-range-id
|   |   |   |   |   uint16
|   |   |   |   +--ro frequency-range
|   |   |   |   |   +--ro lower-frequency    frequency-thz
|   |   |   |   |   +--ro upper-frequency    frequency-thz
|   |   |   |   +--ro stage-order
|   |   |   |   |   uint8
|   |   |   |   +--ro name?
|   |   |   |   |   string
|   |   |   |   +--ro type-variety?
|   |   |   |   |   string
|   |   |   |   +--ro power-param
|   |   |   |   |   +--ro (power-param)
|   |   |   |   |   |   +--:(channel-power)
|   |   |   |   |   |   |   +--ro nominal-carrier-power
|   |   |   |   |   |   |   |   10-types:power-dbm-or-u\
|   |   |   |   |   |   |   |
|   |   |   |   |   |   |   +--:(power-spectral-density)
|   |   |   |   |   |   |   |   +--ro nominal-psd
|   |   |   |   |   |   |   |   |   10-types:psd-or-unknown
|   |   |   |   +--ro pdl?
|   |   |   |   |   10-types:power-loss-or-unknown
|   |   +--ro (amplifier-element-type)
|   |   |   +--:(optical-amplifier)
|   |   |   |   +--ro optical-amplifier
|   |   |   |   |   +--ro actual-gain
|   |   |   |   |   |   10-types:power-gain-or-\
|   |   |   |   |
|   |   |   |   +--ro in-voa?
|   |   |   |   |   10-types:power-loss-or-\
|   |   |   |   |
|   |   |   |   +--ro out-voa?
|   |   |   |   |   10-types:power-loss-or-\

```

nknown

unknown

unknown

```

unknown
|
|      +---ro tilt-target
|      |      10-types:decimal-2-or-u\
nknown
|
|      +---ro total-output-power
|      |      10-types:power-dbm-or-u\
nknown
|
|      +---ro raman-direction?
|      |      enumeration
|      +---ro raman-pump* [pump-id]
|      |      +---ro pump-id      uint16
|      |      +---ro frequency?
|      |      |      10-types:frequency-t\
hz
|
|      +---ro power?
|      |      10-types:decimal-2-o\
r-unknown
|
|      +---:(dynamic-gain-equalizer)
|      |      +---ro dynamic-gain-equalizer!
|      |      |      +---ro media-channel* [flexi-n]
|      |      |      |      +---ro flexi-n      flexi-n
|      |      |      |      +---ro flexi-m      flexi-m
|      |      |      +---ro delta-power?
|      |      |      |      10-types:power-ratio\
-or-unknown
|      +---:(fiber)
|      |      +---ro fiber
|      |      |      +---ro type-variety      string
|      |      |      +---ro length
|      |      |      |      10-types:decimal-2-or-unknown
|      |      |      +---ro loss-coef
|      |      |      |      10-types:decimal-2-or-unknown
|      |      |      +---ro total-loss?
|      |      |      |      10-types:power-loss-or-unknown
|      |      |      +---ro pmd?
|      |      |      |      10-types:decimal-2-or-unknown
|      |      |      +---ro conn-in?
|      |      |      |      10-types:power-loss-or-unknown
|      |      |      +---ro conn-out?
|      |      |      |      10-types:power-loss-or-unknown
|      |      +---:(concentrated-loss)
|      |      |      +---ro concentrated-loss
|      |      |      +---ro loss      10-types:power-loss-or-unknown
augment /nw:networks/nw:network/nw:node/tet:te
|      /tet:tunnel-termination-point:
|      +---ro ttp-transceiver* [transponder-ref transceiver-ref]
|      |      +---ro transponder-ref
|      |      |      -> ../../../../transponders/transponder/transponder-id

```

```

    +--ro transceiver-ref      leafref
augment /nw:networks/nw:network/nw:node/nt:termination-point:
  +--ro protection-type?      identityref
augment /nw:networks/nw:network/nw:node/nt:termination-point
  /tet:te:
    +--ro inter-layer-sequence-number?  uint32
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices:
    +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:information-source-entry/tet:connectivity-matrices
  /tet:connectivity-matrix:
    +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices:
    +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix:
    +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:from:
    +--ro additional-ltp* [ltp-ref]
      +--ro ltp-ref
      |   -> ../../../../../../nt:termination-point/tp-id
      +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:te-node-attributes/tet:connectivity-matrices
  /tet:connectivity-matrix/tet:to:
    +--ro additional-ltp* [ltp-ref]
      +--ro ltp-ref
      |   -> ../../../../../../nt:termination-point/tp-id
      +--ro roadm-path-impairments-set?    leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities:
    +--ro add-path-impairments-set?      leafref
    +--ro drop-path-impairments-set?     leafref
augment /nw:networks/nw:network/nw:node/tet:te
  /tet:tunnel-termination-point
  /tet:local-link-connectivities
  /tet:local-link-connectivity:
    +--ro add-path-impairments-set?      leafref
    +--ro drop-path-impairments-set?     leafref
    +--ro llc-transceiver* [ttp-transponder-ref ttp-transceiver-ref]
      | +--ro ttp-transponder-ref
      | |   -> ../../../../../../ttp-transceiver/transponder-ref

```

```

|   +--ro ttp-transceiver-ref
|   |   -> ../../../../ttp-transceiver/transceiver-ref
|   +--ro is-allowed?          boolean
|   +--ro add-path-impairments-set?  leafref
|   +--ro drop-path-impairments-set?  leafref
+--ro additional-ltp* [ltp-ref]
  +--ro ltp-ref
  |   -> ../../../../nt:termination-point/tp-id
  +--ro add-path-impairments-set?  leafref
  +--ro drop-path-impairments-set?  leafref

```

4. Optical Impairment Topology YANG Model

```

<CODE BEGINS> file "ietf-optical-impairment-topology.yang"
module iETF-optical-impairment-topology {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-optical-impairment-topology";
  prefix oit;

  import iETF-network {
    prefix nw;
    reference
      "RFC 8345: A YANG Data Model for Network Topologies";
  }
  import iETF-network-topology {
    prefix nt;
    reference
      "RFC 8345: A YANG Data Model for Network Topologies";
  }
  import iETF-te-topology {
    prefix tet;
    reference
      "RFC 8795: YANG Data Model for Traffic Engineering (TE)
      Topologies";
  }
  import iETF-te-types {
    prefix te-types;
    reference
      "RFC YYYY: Updated Common YANG Data Types for Traffic
      Engineering";
  }

  /* Note: The RFC Editor will replace YYYY with the number assigned
     to the RFC once draft-ietf-teas-rfc8776-update becomes an RFC.*/

  import iETF-layer0-types {
    prefix l0-types;
  }

```

```
reference
  "RFC ZZZZ: A YANG Data Model for Layer 0 Types";
}

/* Note: The RFC Editor will replace ZZZZ with the number assigned
   to the RFC once draft-ietf-ccamp-rfc9093-bis becomes an RFC.*/

organization
  "IETF CCAMP Working Group";
contact
  "WG Web: <https://datatracker.ietf.org/wg/ccamp/>
   WG List: <mailto:ccamp@ietf.org>

   Editor:   Young Lee <younglee.tx@gmail.com>
   Editor:   Haomian Zheng <zhenghaomian@huawei.com>
   Editor:   Nicola Sambo <nicosambo@gmail.com>
   Editor:   Victor Lopez <victor.lopez@nokia.com>
   Editor:   Gabriele Galimberti <gabriele.galimberti@nokia.com>
   Editor:   Giovanni Martinelli <giomarti@cisco.com>
   Editor:   Jean-Luc Auge <jeanluc.auge@orange.com>
   Editor:   Le Rouzic Esther <esther.lerouzic@orange.com>
   Editor:   Julien Meuric <julien.meuric@orange.com>
   Editor:   Italo Busi <Italo.Busi@huawei.com>
   Editor:   Dieter Beller <dieter.beller@nokia.com>
   Editor:   Sergio Belotti <Sergio.belotti@nokia.com>
   Editor:   Griseri Enrico <enrico.griseri@nokia.com>
   Editor:   Gert Grammel <ggrammel@juniper.net>";
description
  "This module contains a collection of YANG definitions for
   impairment-aware optical networks.

   Copyright (c) 2025 IETF Trust and the persons identified as
   authors of the code. All rights reserved.

   Redistribution and use in source and binary forms, with or
   without modification, is permitted pursuant to, and subject
   to the license terms contained in, the Revised BSD
   License set forth in Section 4.c of the IETF Trust's Legal
   Provisions Relating to IETF Documents
   (https://trustee.ietf.org/license-info).

   This version of this YANG module is part of RFC XXXX; see
   the RFC itself for full legal notices.

   The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL
   NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'NOT RECOMMENDED',
   'MAY', and 'OPTIONAL' in this document are to be interpreted as
   described in BCP 14 (RFC 2119) (RFC 8174) when, and only when,
```

```
    they appear in all capitals, as shown here.";

// RFC Ed.: replace XXXX with actual RFC number and remove
// this note
// replace the revision date with the module publication date
// the format is (year-month-day)

revision 2025-10-10 {
    description
        "Initial version.";
    reference
        "RFC XXXX: A Yang Data Model for Impairment-aware
        Optical Networks";
}

/*
 * Identities
 */

identity otsi-protection {
    base te-types:lsp-protection-type;
    description
        "Individual OTSi(G) protection LSP protection type.";
    reference
        "ITU-T G.873.1 v5.2 (02/2022): Optical transport network:
        Linear protection";
}

/*
 * Groupings
 */

grouping amplifier-params {
    description
        "Describes parameters for an amplifier";
    container amplifier {
        description
            "Amplifier type, operational parameters are described.";
        leaf type-variety {
            type string;
            mandatory true;
            description
                "String identifier of amplifier type referencing
                a specification in a separate equipment catalog";
        }
        container operational {
            description
                "Amplifier operational parameters";
        }
    }
}
```



```
list amplifier-element {
  key "frequency-range-id stage-order";
  description
    "The list of parallel amplifier elements within an
    amplifier used to amplify different frequency ranges.

    Two elements in the list MUST NOT have the same range
    or overlapping ranges.";
  uses l0-types:frequency-range-with-identifier;
  leaf stage-order {
    type uint8;
    description
      "It allows defining for each spectrum bandwidth the
      cascade order of each amplifier-element.";
  }
  leaf name {
    type string;
    description
      "The name of the amplifier element as specified in
      the vendor's specification associated with the
      type-variety.";
  }
  leaf type-variety {
    type string;
    description
      "String identifier of amplifier element type
      referencing a specification in a separate equipment
      catalog.

      This attributes applies only when the type-variety of
      the amplifier is not sufficient to describe the
      amplifier element type.";
  }
  container power-param {
    description
      "The optical power after the out-voa of each amplifier
      element.";
    choice power-param {
      mandatory true;
      description
        "Select the mode: channel power or power spectral
        density (PSD).";
      case channel-power {
        leaf nominal-carrier-power {
          type l0-types:power-dbm-or-unknown;
          mandatory true;
          description
            "Reference channel power.";
        }
      }
    }
  }
}
```

```
    }  
  }  
  case power-spectral-density {  
    leaf nominal-psd {  
      type l0-types:psd-or-unknown;  
      mandatory true;  
      description  
        "Reference power spectral density (PSD).";  
    }  
  }  
}  
} // container power-param  
leaf pdl {  
  type l0-types:power-loss-or-unknown;  
  description  
    "Polarization Dependent Loss (PDL)";  
}  
choice amplifier-element-type {  
  mandatory true;  
  description  
    "Identifies whether the amplifier element is an  
    Optical Amplifier (OA) or a Dynamic Gain Equalizer  
    (DGE).";  
  container optical-amplifier {  
    description  
      "The attributes applicable only to amplifier  
      elements";  
    leaf actual-gain {  
      type l0-types:power-gain-or-unknown;  
      mandatory true;  
      description  
        "The value of the gain provided by the  
        amplification stage of the optical amplifier.";  
    }  
    leaf in-voa {  
      type l0-types:power-loss-or-unknown;  
      description  
        "Loss introduced by the Variable Optical Attenuator  
        (VOA) at the input of the amplification stage of  
        the amplifier, if present";  
    }  
    leaf out-voa {  
      type l0-types:power-loss-or-unknown;  
      description  
        "Loss introduced by the Variable Optical Attenuator  
        (VOA) at the output of the amplification stage of  
        the amplifier, if present.";  
    }  
  }  
}
```

```
leaf tilt-target {
  type 10-types:decimal-2-or-unknown;
  units "dB";
  mandatory true;
  description
    "The tilt target defined between lower and upper
    frequency of the amplifier frequency range.";
}
leaf total-output-power {
  type 10-types:power-dbm-or-unknown;
  mandatory true;
  description
    "It represent total output power measured in the
    range specified by the frequency-range.

    Optical power is especially needed to
    re-compute/check consistency of span
    (fiber + concentrated loss) loss value, with
    respect to loss/gain information on elements.";
}
leaf raman-direction {
  type enumeration {
    enum co-propagating {
      description
        "Co-propagating indicates that optical pump
        light is injected in the same direction to the
        optical signal that is amplified
        (forward pump).";
    }
    enum counter-propagating {
      description
        "Counter-propagating indicates that optical
        pump light is injected in opposite direction
        to the optical signal that is amplified
        (backward pump).";
    }
  }
  description
    "The direction of injection of the raman pump.";
}
list raman-pump {
  key "pump-id";
  description
    "The list of pumps for the Raman amplifier.";
  leaf pump-id {
    type uint16;
    description
      "The identifier of a pump within an amplifier
```

```

        element.";
    }
    leaf frequency {
        type l0-types:frequency-thz;
        description
            "The raman pump central frequency.";
    }
    leaf power {
        type l0-types:decimal-2-or-unknown;
        units "Watts";
        description
            "The total pump power considering a depolarized
            pump at the raman pump central frequency.";
    }
}
} // container optical-amplifier
container dynamic-gain-equalizer {
    presence
        "When present it indicates that the amplifier element
        is a Dynamic Gain Equalizer (DGE)";
    description
        "The attributes applicable only to DEG amplifier
        elements.";
    list media-channel {
        key "flexi-n";
        description
            "List of media channels represented as (n,m)";
        uses l0-types:flexi-grid-frequency-slot {
            refine "flexi-m" {
                mandatory true;
            }
        }
        leaf delta-power {
            type l0-types:power-ratio-or-unknown;
            description
                "Deviation from the reference carrier power
                defined for the OMS.";
        }
    } // media channels list
} // container dynamic-gain-equalizer
} // choice amplifier-element-type
} // list amplifier-element
} // container operational
} // container amplifier
} // grouping amplifier-params

grouping fiber-params {
    description

```

```
"String identifier of fiber type referencing a
specification in a separate equipment catalog";
container fiber {
  description
    "Fiber characteristics";
  leaf type-variety {
    type string;
    mandatory true;
    description
      "Fiber type";
  }
  leaf length {
    type l0-types:decimal-2-or-unknown;
    units "km";
    mandatory true;
    description
      "Length of fiber";
  }
  leaf loss-coef {
    type l0-types:decimal-2-or-unknown;
    units "dB/km";
    mandatory true;
    description
      "Loss coefficient of the fiber";
  }
  leaf total-loss {
    type l0-types:power-loss-or-unknown;
    description
      "The measured total loss of the fiber, which includes
      all possible losses: fiber loss and conn-in and conn-out
      losses.

      This attribute is not present when the total loss cannot
      be measured.";
  }
  leaf pmd {
    type l0-types:decimal-2-or-unknown;
    units "ps";
    description
      "PMD of the fiber";
  }
  leaf conn-in {
    type l0-types:power-loss-or-unknown;
    description
      "connector-in";
  }
  leaf conn-out {
    type l0-types:power-loss-or-unknown;
```

```
        description
            "connector-out";
    }
}
}

grouping roadm-common-path {
    description
        "The optical impairments of a ROADM which are common to all
        its paths (express path, add path or drop path).";
    leaf roadm-pmd {
        type union {
            type decimal64 {
                fraction-digits 8;
                range "0..max";
            }
            type l0-types:unknown-value;
        }
        units "ps";
        description
            "Polarization Mode Dispersion (PMD).";
    }
    leaf roadm-cd {
        type l0-types:decimal-5-or-unknown;
        units "ps/nm";
        description
            "Chromatic Dispersion (CD)";
    }
    leaf roadm-pdl {
        type l0-types:power-loss-or-unknown;
        description
            "Polarization Dependent Loss (PDL)";
    }
    leaf roadm-inband-crosstalk {
        type l0-types:decimal-2-or-unknown;
        units "dB";
        description
            "In-band crosstalk, or coherent crosstalk, can occur in
            components that can have multiple same wavelength inputs
            with the inputs either routed to different output ports,
            or all but one blocked";
    }
    leaf roadm-maxloss {
        type l0-types:power-loss-or-unknown;
        description
            "This is the maximum expected path loss from the
            ROADM ingress to the ROADM egress
            assuming no additional path loss is added";
    }
}
```

```
    }
  } // grouping roadm-common-path

  grouping roadm-express-path {
    description
      "The optical impairments of a ROADM express path.";
    uses roadm-common-path;
  } // grouping roadm-express-path

  grouping roadm-add-path {
    description
      "The optical impairments of a ROADM add path.";
    uses roadm-common-path {
      refine "roadm-inband-crosstalk" {
        description
          "In-band crosstalk, or coherent crosstalk,
           can occur in components that can have multiple same
           wavelength inputs, with the inputs either
           routed to different output ports,
           or all but one blocked.

           In the case of add path it is the total
           of the add block + egress WSS crosstalk contributions.";
      }
      refine "roadm-maxloss" {
        description
          "This is the maximum expected add path loss from
           the add/drop port input to the ROADM egress,
           assuming no additional add path loss is added.

           This is used to establish the minimum required
           transponder output power required
           to hit the ROADM egress target power
           levels and preventing
           to hit the WSS attenuation limits.

           If the add path contains an internal amplifier
           this loss value MUST be based
           on worst case expected amplifier gain due to
           ripple or gain uncertainty";
      }
    }
  }
  leaf roadm-pmax {
    type l0-types:power-dbm-or-unknown;
    description
      "This is the maximum (per carrier) power level
       permitted at the add block input ports,
       that can be handled by the ROADM node.
```

```

    This can reflect either add amplifier power
    constraints or WSS adjustment limits.
    Higher power transponders would need to have
    their launch power reduced
    to this value or lower";
}
leaf roadm-osnr {
    type l0-types:snr-or-unknown;
    description
        "Optical Signal-to-Noise Ratio (OSNR).

        If the add path contains the ability to adjust the
        carrier power levels into an add path amplifier
        (if present) to a target value,
        this reflects the OSNR contribution of the
        add amplifier assuming this target value is obtained.

        The worst case OSNR based on the input power and
        NF calculation method, and this value, MUST be used
        (if both are defined).";
}
leaf roadm-noise-figure {
    type l0-types:decimal-5-or-unknown;
    units "dB";
    description
        "Noise Figure. If the add path contains an amplifier,
        this is the noise figure of that amplifier inferred
        to the add port.
        This permits add path OSNR calculation based
        on the input power levels to the add block
        without knowing the ROADM path losses to
        the add amplifier.";
}
} // grouping roadm-add-path

grouping roadm-drop-path {
    description
        "The optical impairments of a ROADM drop path";
    uses roadm-common-path {
        refine "roadm-inband-crosstalk" {
            description
                "In-band crosstalk, or coherent crosstalk, can occur in
                components that can have multiple same wavelength
                inputs, with the inputs either routed to different
                output ports, or all but one blocked.

                In the case of drop path it is the total
                of the ingress
```



```
        to drop e.g. WSS and drop block crosstalk
        contributions.";
    }
    refine "roadm-maxloss" {
        description
            "The net loss from the ROADM input,to the output
            of the drop block.
            If this ROADM ingress-to-drop path includes an amplifier,
            the amplifier gain reduces the net loss.
            This is before any additional drop path attenuation
            that may be required
            due to drop amplifier power constraints.
            The max value correspond to worst case expected loss,
            including amplifier gain ripple or uncertainty.
            It is the maximum output power of the drop
            amplifier.";
    }
}
leaf roadm-minloss {
    type l0-types:power-loss-or-unknown;
    description
        "The net loss from the ROADM input, to the
        output of the drop block.
        If this ROADM ingress-to-drop path includes
        an amplifier,the amplifier gain reduces the net loss.
        This is before any additional drop path attenuation
        that may be required due to drop amplifier power
        constraints.
        The min value correspond to best case expected loss,
        including amplifier gain ripple or uncertainty.";
}
leaf roadm-typloss {
    type l0-types:power-loss-or-unknown;
    description
        "The net loss from the ROADM input,
        to the output of the drop block.
        If this ROADM ingress-to-drop path
        includes an amplifier,
        the amplifier gain reduces the net loss.
        This is before any additional drop path
        attenuation
        that may be required due to drop amplifier
        power constraints.
        The typ value correspond to typical case
        expected loss.";
}
leaf roadm-pmin {
    type l0-types:power-dbm-or-unknown;
```

```
description
  "If the drop path has additional loss that is added, for
  example, to hit target power levels into a drop path
  amplifier, or simply, to reduce the power of a strong
  carrier (due to ripple, for example), then the use of the
  ROADM input power levels and the above drop losses is
  not appropriate.

  This parameter corresponds to the minimum value of the Drop
  Channel output power range, as defined in table 8-6 of
  ITU-T G.680.";
reference
  "ITU-T G.680 v1.0 (07/2007): Physical transfer functions of
  optical network elements, table 8-6";
}
leaf roadm-pmax {
  type l0-types:power-dbm-or-unknown;
  description
    "If the drop path has additional loss that is added, for
    example, to hit target power levels into a drop path
    amplifier, or simply ,to reduce the power of a strong
    carrier (due to ripple, for example), then the use of the
    ROADM input power levels and the above drop losses is
    not appropriate.

    This parameter corresponds to the maximum value of the Drop
    Channel output power range, as defined in table 8-6 of
    ITU-T G.680.";
  reference
    "ITU-T G.680 v1.0 (07/2007): Physical transfer functions of
    optical network elements, table 8-6";
}
leaf roadm-ptyp {
  type l0-types:power-dbm-or-unknown;
  description
    "If the drop path has additional loss that is added,
    for example, to hit target power levels into a
    drop path amplifier, or simply, to reduce the
    power of a strong carrier (due to ripple, for example),
    then the use of the ROADM input power levels and
    the above drop losses is not appropriate.
    This parameter corresponds to the typical case
    per carrier power levels expected
    at the output of the drop block.";
}
leaf roadm-osnr {
  type l0-types:snr-or-unknown;
  description
```

```
"Optical Signal-to-Noise Ratio (OSNR).

Expected OSNR contribution of the drop path
amplifier(if present)
for the case of additional drop path loss
(before this amplifier)
in order to hit a target power level (per carrier).

If both, the OSNR based on the ROADM
input power level
(Pcarrier =
Pref+10Log(carrier-baudrate/ref-baud) + delta-power)
and the input inferred NF(NF.drop),
and this OSNR value, are defined,
the minimum value between these two MUST be used";
}
leaf roadm-noise-figure {
  type l0-types:decimal-5-or-unknown;
  units "dB";
  description
    "Drop path Noise Figure.
    If the drop path contains an amplifier,
    this is the noise figure
    of that amplifier, inferred to the
    ROADM ingress port.
    This permits to determine
    amplifier OSNR contribution
    without having to specify the
    ROADM node's losses to that amplifier.
    This applies for the case of no
    additional drop path loss,
    before the amplifier, in order to reduce the power
    of the carriers to a target value";
}
} // grouping roadm-drop-path

grouping concentrated-loss-params {
  description
    "Concentrated loss";
  container concentrated-loss {
    description
      "Concentrated loss";
    leaf loss {
      type l0-types:power-loss-or-unknown;
      mandatory true;
      description
        "Loss introduced by the concentrated loss element.";
    }
  }
}
```

```
    }
  }

  grouping oms-general-optical-params {
    description
      "OMS link optical parameters";
    leaf generalized-snr {
      type l0-types:snr;
      description
        "Generalized SNR";
    }
    leaf equalization-mode {
      type identityref {
        base l0-types:type-power-mode;
      }
      description
        "The equalization mode.

        When not present it indicates that the information about
        the equalization mode is not reported.

        Reporting this value is needed to support optical
        impairments applications.";
    }
    container power-param {
      description
        "Optical channel power or power spectral density (PSD)
        after the ROADM.";
      leaf nominal-carrier-power {
        when "derived-from-or-self ../../equalization-mode, "
          + "'l0-types:carrier-power'";
        type l0-types:power-dbm-or-unknown;
        description
          "Reference channel power.";
      }
      leaf nominal-psd {
        when "derived-from-or-self ../../equalization-mode, "
          + "'l0-types:power-spectral-density'";
        type l0-types:psd-or-unknown;
        description
          "Reference power spectral density (PSD).";
      }
    } // container power-param
  } // grouping oms-general-optical-params

  grouping otsi-group {
    description
      "OTSIG definition , representing client
```

```
    digital information stream supported by one or more OTSi";
list otsi {
  key "carrier-id";
  description
    "list of OTSi contained in one OTSiG.
    The list could also be of only one element";
  leaf carrier-id {
    type uint16;
    description
      "OTSi carrier-id";
  }
  leaf carrier-frequency {
    type union {
      type 10-types:frequency-thz;
      type 10-types:unknown-value;
    }
    description
      "OTSi carrier frequency, equivalent to the
      actual configured transmitter frequency.";
  }
  leaf-list e2e-mc-path-id {
    type uint16;
    description
      "The list of the possible end-to-end Media Channel
      (e2e-MC) paths associated with the OTSi which have
      different optical impairments.

      This list is meaningful in case the OTSi can be associated
      with multiple end-to-end Media Channel (e2e-MC) paths
      (e.g., when OPS protection is configured).

      The list can be empty when the OTSi has only one
      e2e-MC path.";
  }
} // OTSi list
} // OTSiG grouping

grouping media-channel-groups {
  description
    "media channel groups.

    This grouping is not intended to be reused outside of this
    module.";
  container media-channel-groups {
    presence
      "When present, it indicates that the list media channel
      groups is reported.";
    description
```

```
"The top level container for the list of media channel
groups.";
list media-channel-group {
  key "otsi-group-ref";
  description
    "The list of media channel groups";
  leaf otsi-group-ref {
    type leafref {
      path "../../../../../otsis/"
        + "otsi-group/otsi-group-id";
    }
    description
      "Reference to the OTSiG to which the OTSis carried by
      this media channel group belong to.";
  }
  list media-channel {
    key "media-channel-id";
    unique "flexi-n";
    description
      "list of media channels represented as (n,m)";
    leaf media-channel-id {
      type int16;
      description
        "The identifier of media channel within media channel
        group.

        It may be equal to the flexi-n attribute, when the
        flexi-n attribute is present.";
    }
  }
  uses l0-types:flexi-grid-frequency-slot;
  list otsi-ref {
    key "carrier-ref";
    description
      "The list of references to the OTSis and their
      end-to-end Media Channel (e2e-MC) paths within the
      OTSiG carried by this media channel.";
    leaf carrier-ref {
      type leafref {
        path "../../../../../otsis/"
          + "otsi-group[otsi-group-id=current()]"
          + "../../otsi-group-ref]/"
          + "otsi/carrier-id";
      }
      description
        "Reference to the OTSi within the OTSiG carried
        by this media channel.";
    }
  }
  leaf-list e2e-mc-path-ref {
```

```

    type leafref {
      path "../../../../../otsis/"
        + "otsi-group[otsi-group-id=current()]"
        + "../../otsi-group-ref]/"
        + "otsi[carrier-id=current()]"
        + "../../carrier-ref]/e2e-mc-path-id";
    }
    description
      "References to the end-to-end Media Channel (e2e-MC)
       paths of this OTSi which are routed through this
       media channel.";
  }
}
leaf delta-power {
  type l0-types:power-ratio-or-unknown;
  description
    " Deviation from the reference carrier power defined
     for the OMS.";
}
} // media channels list
} // media-channel-groups list
} // media media-channel-groups grouping

grouping oms-element {
  description
    "OMS description";
  container oms-elements {
    presence
      "When present, it indicates that the list of OMS elements
       is reported.";
    description
      "The top level container for the list of OMS elements.";
    list oms-element {
      key "elt-index";
      description
        "The building blocks (e.g., fibers, amplifiers,
         concentrated loss) that compose the WDM TE-link between
         its link termination points.";
      leaf elt-index {
        type uint16;
        description
          "An index allowing to sort the elements in their physical
           order along the link without constraining their position
           in the list.";
      }
      leaf oms-element-uid {
        type union {

```

```

        type string;
        type l0-types:unknown-value;
    }
    description
        "Unique id of the element.";
}
container reverse-element-ref {
    description
        "It contains references to the elements which are
        associated with this element in the reverse
        direction.";
    leaf link-ref {
        type leafref {
            path "../..//../..//../..//../..//nt:link/nt:link-id";
        }
        description
            "The reference to the OMS link which the OMS elements
            belongs to.";
    }
    leaf-list oms-element-ref {
        type leafref {
            path "../..//../..//../..//../..//nt:link[nt:link-id="
                + "current()/../link-ref]/tet:te/"
                + "tet:te-link-attributes/oms-attributes/"
                + "oms-elements/oms-element/elt-index";
        }
        description
            "The references to the OMS elements.";
    }
}
choice element {
    mandatory true;
    description
        "OMS element type";
    case amplifier {
        uses tet:geolocation-container;
        uses amplifier-params;
    }
    case fiber {
        uses fiber-params;
    }
    case concentrated-loss {
        uses concentrated-loss-params;
    }
}
}
}
}

```



```
grouping otsi-ref {
  description
    "References to an OTSi.

    This grouping is intended to be reused within the
    transceiver's list only.";
  leaf otsi-group-ref {
    type leafref {
      path "../.../.../.../otsis/otsi-group/"
        + "otsi-group-id";
    }
    description
      "The OTSi generated by the transceiver's transmitter.";
  }
  leaf otsi-ref {
    type leafref {
      path "../.../.../.../.../otsis/otsi-group"
        + "[otsi-group-id=current()/../otsi-group-ref]/otsi/"
        + "carrier-id";
    }
    description
      "The OTSi generated by the transceiver's transmitter.";
  }
}

/*
 * Data nodes
 */

augment "/nw:networks/nw:network/nw:network-types"
  + "/tet:te-topology" {
  description
    "optical-impairment topology augmented";
  container optical-impairment-topology {
    presence
      "Indicates an impairment-aware topology of optical networks";
    description
      "Container to identify impairment-aware topology type";
    reference
      "RFC8345: A YANG Data Model for Network Topologies.";
  }
}

augment "/nw:networks/nw:network" {
  when './nw:network-types/tet:te-topology'
    + '/oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
```

```
        topology.";
    }
    description
        "Network augmentation for optical impairments data.";
    container otsis {
        presence "When present, it indicates that OTSi information is
            reported.";
        config false;
        description
            "The information about the OTSis configured on the WDM-TE
            link.";
        list otsi-group {
            key "otsi-group-id";
            description
                "the list of possible OTSiG representing client digital
                stream";
            leaf otsi-group-id {
                type string;
                description
                    "A network-wide unique identifier of otsi-group element.
                    It could be structured e.g., as an URI or as an UUID.";
            }
            uses otsi-group;
        } // list of OTSiG
    }
    container templates {
        config false;
        description
            "Templates for set of parameters which can be common to
            multiple elements.";
        container roadm-path-impairments-sets {
            description
                "The top level container for the list of the set of
                optical impairments related to ROADM paths.";
            list roadm-path-impairments-set {
                key "roadm-path-impairments-set-id";
                description
                    "The list of the set of optical impairments related to a
                    ROADM path.";
                leaf roadm-path-impairments-set-id {
                    type string;
                    description
                        "The identifier of the set of optical impairments
                        related to a ROADM path.";
                }
                leaf description {
                    type string;
                    description

```

```
        "The textual description of the the set of optical
          impairments related to a ROADM path.";
    }
    choice impairment-type {
      description
        "Type path impairment";
      case roadm-express-path {
        list roadm-express-path {
          key "frequency-range-id";
          description
            "The list of optical impairments on a ROADM express
              path for different frequency ranges.

              Two elements in the list MUST NOT have the same
              range or overlapping ranges.";
          uses l0-types:frequency-range-with-identifier;
          uses roadm-express-path;
        }
      }
      case roadm-add-path {
        list roadm-add-path {
          key "frequency-range-id";
          description
            "The list of optical impairments on a ROADM add
              path for different frequency ranges.

              Two elements in the list MUST NOT have the same
              range or overlapping ranges.";
          uses l0-types:frequency-range-with-identifier;
          uses roadm-add-path;
        }
      }
      case roadm-drop-path {
        list roadm-drop-path {
          key "frequency-range-id";
          description
            "The list of optical impairments on a ROADM add
              path for different frequency ranges.

              Two elements in the list MUST NOT have the same
              range or overlapping ranges.";
          uses l0-types:frequency-range-with-identifier;
          uses roadm-drop-path;
        }
      }
    }
  } // list roadm-path-impairments-set
} // container roadm-path-impairments-sets
```

```
    container explicit-transceiver-modes {
      description
        "The top level container for the list of the
        transceivers' explicit modes.";
      list explicit-transceiver-mode {
        key "explicit-transceiver-mode-id";
        description
          "The list of the transceivers' explicit modes.";
        leaf explicit-transceiver-mode-id {
          type string;
          description
            "The identifier of the transceivers' explicit mode.";
        }
        uses l0-types:explicit-mode;
      } // list explicit-transceiver-mode
    } // container explicit-transceiver-modes
  } // container templates
} // augment network

augment "/nw:networks/nw:network/nw:node" {
  when '../nw:network-types/tet:te-topology'
    + '/oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment.";
  }
  description
    "Node augmentation for optical impairments data.";
  container transponders {
    presence
      "If present, it indicates that the list of transponders is
      reported.";
    config false;
    description
      "The top level container for the list of transponders.";
    list transponder {
      key "transponder-id";
      description
        "The list of transponders.";
      leaf transponder-id {
        type uint32;
        description
          "transponder identifier";
      }
      leaf termination-type-capabilities {
        type enumeration {
          enum tunnel-only {
            description
              "The transponder can only be used in an Optical
```

```
        Tunnel termination configuration.";
    }
    enum 3r-only {
        description
            "The transponder can only be used in a 3R
            configuration.";
    }
    enum 3r-or-tunnel {
        description
            "The transponder can be configure to be used either
            in an Optical Tunnel termination configuration or in
            a 3R configuration.";
    }
}
description
    "Describes whether the transponder can be used in an
    Optical Tunnel termination configuration or in a 3R
    configuration (or both).";
}
leaf supported-3r-mode {
    when '(!../termination-type-capabilities = "3r-only") '
        + 'or (!../termination-type-capabilities = '
        + '"3r-or-tunnel")' {
        description
            "Applies only when the transponder supports 3R
            configuration.";
    }
    type enumeration {
        enum unidir {
            description
                "Unidirectional 3R configuration.";
        }
        enum bidir {
            description
                "Bidirectional 3R configuration.";
        }
    }
}
description
    "Describes the supported 3R configuration type.";
}
list transceiver {
    key "transceiver-id";
    min-elements 1;
    description
        "List of transceiver related to a transponder";
    leaf transceiver-id {
        type uint32;
        description
```

```

    "Transceiver identifier";
}
uses l0-types:transceiver-capabilities {
    augment "supported-modes/supported-mode/mode/"
        + "explicit-mode/explicit-mode" {
        description
            "Augment the explicit-mode container with the
             proper leafref.";
        leaf explicit-transceiver-mode-ref {
            type leafref {
                path "../.../.../.../.../.../.../.../oit:templates"
                    + "/oit:explicit-transceiver-modes"
                    + "/oit:explicit-transceiver-mode"
                    + "/oit:explicit-transceiver-mode-id";
            }
            description
                "The reference to the explicit transceiver
                 mode template.";
        }
    }
}
leaf configured-mode {
    type union {
        type l0-types:unknown-value;
        type leafref {
            path "../supported-modes/supported-mode/mode-id";
        }
    }
    description
        "Reference to the configured mode for transceiver
         compatibility approach.

         The 'unknown' value is used to report that no mode has
         been configured and there is no default mode.

         When not present, the configured-mode is not reported
         by the server.";
}
uses l0-types:common-transceiver-param;
container outgoing-otsi {
    when '../.../.../.../.../otsis' {
        description
            "It applies only when the OTSi information is
             reported.";
    }
    description
        "The OTSi generated by the transceiver's transmitter.";
    uses otsi-ref;

```

```
    }
    container incoming-otsi {
      when '../.../.../.../otsis' {
        description
          "It applies only when the OTSi information is
            reported.";
      }
      description
        "The OTSi received by the transceiver's received.";
      uses otsi-ref;
    }
    leaf configured-termination-type {
      type enumeration {
        enum unused-transceiver {
          description
            "The transcevier is not used.";
        }
        enum tunnel-termination {
          description
            "The transceiver is currently used in an Optical
              Tunnel termination configuration.";
        }
        enum 3r-regeneration {
          description
            "The transceiver is currently used in a 3R
              configuration.";
        }
      }
      description
        "Describes whether the current configuration of the
          transceiver is used in an Optical Tunnel termination
          configuration or in a 3R configuration.

          If empty, it means that the information about the
          configured-termination-type is not reported.";
    }
  } // end of list of transceiver
} // end list of transponder
}
container regen-groups {
  presence "When present, it indicates that the list of 3R groups
    is reported.";
  config false;
  description
    "The top level container for the list of 3R groups.";
  list regen-group {
    key "group-id";
    description
```

```
"The list of 3R groups.

Any 3R group represent a group of transponder in which an
a an electrical connectivity is either in place or could
be dynamically provided, to associated transponders used
for 3R regeneration.";
leaf group-id {
  type uint32;
  description
    "Group identifier used an index to access elements in the
    list of 3R groups.";
}
leaf regen-metric {
  type uint32;
  description
    "The cost permits choice among different group of
    transponders during path computation";
}
leaf-list transponder-ref {
  type leafref {
    path "../../../../../transponders/transponder/transponder-id";
  }
  description
    "The list of transponder belonging to this 3R group.";
}
} // end 3R-group
}

augment "/nw:networks/nw:network/nt:link/tet:te"
+ "/tet:te-link-attributes" {
  when '../../../../../nw:network-types/tet:te-topology/'
+ 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology.";
  }
  description
    "Optical Link augmentation for impairment data.";
  container oms-attributes {
    config false;
    description
      "OMS attributes";
    uses oms-general-optical-params;
    uses media-channel-groups;
    uses oms-element;
  }
}
```



```
augment "/nw:networks/nw:network/nw:node/tet:te"
  + "/tet:tunnel-termination-point" {
  when '../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology.";
  }
  description
    "Tunnel termination point augmentation for impairment data.";
  list ttp-transceiver {
    when '../.../transponders' {
      description
        "It applies only when the list of transponders is
        reported.";
    }
    key "transponder-ref transceiver-ref";
    config false;
    min-elements 1;
    description
      "The list of the transceivers used by the TTP.";
    leaf transponder-ref {
      type leafref {
        path "../.../.../transponders/transponder/transponder-id";
      }
      description
        "The reference to the transponder hosting the transceiver
        of the TTP.";
    }
    leaf transceiver-ref {
      type leafref {
        path "../.../.../.../transponders/transponder"
          + "[transponder-id=current()/../transponder-ref]/"
          + "transceiver/transceiver-id";
      }
      description
        "The reference to the transceiver of the TTP.";
    }
  } // list of transceivers
} // end of augment

augment "/nw:networks/nw:network/nw:node/nt:termination-point" {
  when '../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology";
  }
}
```

```
description
  "Augment LTP";
leaf protection-type {
  type identityref {
    base te-types:lsp-protection-type;
  }
  config false;
  description
    "The protection type that this LTP is capable of.

    When not present it indicates that the information about
    the protection type is not reported.";
}
}

augment "/nw:networks/nw:network/nw:node/nt:termination-point"
+ "/tet:te" {
  when '../..../nw:network-types/tet:te-topology/'
  + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology";
  }
  description
    "Augment TE attributes of an LTP";
leaf inter-layer-sequence-number {
  type uint32;
  config false;
  description
    "The inter-layer-sequence-number (ILSN) is used to report
    additional connectivity constraints between a client layer
    Link Termination Point (LTP), such as a muxponder port, and
    the server layer Tunnel Termination Point (TTP).

    A client service cannot be setup between two client layer
    LTPs which report different values of the ILSN.

    This attribute is not reported when there are no additional
    connectivity constraints.

    Therefore, a client service can be setup when at least one
    of the two client layer LTPs does not report any ILSN or
    both client layer LTPs report the same ILSN value and the
    corresponding server layer TTPs have at least one common
    server-layer switching capability and at least one common
    client-layer switching capability.";
}
}
```

```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices" {
  when '../.../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology ";
  }
  description
    "Augment default TE node connectivity matrix information
    source.";
  leaf roadm-path-impairments-set {
    type leafref {
      path "../.../.../.../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    config false;
    description
      "Pointer to the list set of ROADM optical impairments";
  }
} // augmentation connectivity-matrices information-source

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:information-source-entry/tet:connectivity-matrices/"
  + "tet:connectivity-matrix" {
  when '../.../.../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology ";
  }
  description
    "Augment TE node connectivity matrix entry information
    source.";
  leaf roadm-path-impairments-set {
    type leafref {
      path "../.../.../.../.../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    config false;
    description
      "Pointer to the list set of ROADM optical impairments";
  }
} // augmentation connectivity-matrix information-source
```

```
augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices" {
  when '../.../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for Optical Impairment
      topology ";
  }
  description
    "Augment default TE node connectivity matrix.";
  leaf roadm-path-impairments-set {
    type leafref {
      path "../.../.../.../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    config false;
    description
      "Pointer to the list set of ROADM optical
      impairments";
  }
} // augmentation connectivity-matrices

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/"
  + "tet:connectivity-matrices/tet:connectivity-matrix" {
  when '../.../.../.../nw:network-types/tet:te-topology/'
    + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for
      Optical Impairment topology ";
  }
  description
    "Augment TE node connectivity matrix entry.";
  leaf roadm-path-impairments-set {
    type leafref {
      path "../.../.../.../.../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    config false;
    description
      "Pointer to the list set of ROADM optical
      impairments";
  }
} // augmentation connectivity-matrix
```

```

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/tet:from" {
when '../.../.../.../.../nw:network-types/tet:te-topology/'
  + 'oit:optical-impairment-topology' {
  description
    "This augment is only valid for
    Optical Impairment topology ";
}
description
  "Augment the attributes for the 'from' LTP for the TE node
  connectivity matrix entry.";
list additional-ltp {
  when "derived-from-or-self(.../.../.../.../.../"
    + "nt:termination-point"
    + "[nt:tp-id=current()/.../.../tet:to/tet:tp-ref]/"
    + "oit:protection-type,"
    + "'oit:otsi-protection')" {
    description
      "This list applies only when the 'to' LTP for this
      connectivity matrix entry supports individual OTSi(G)
      protection.";
  }
  key "ltp-ref";
  config false;
  description
    "The restricted list of the potential secondary LTPs that
    can be selected when the 'from' LTP of this connectivity
    matrix entry is selected as a working LTP.

    If this list is empty, all the other LTPs that can reach
    the 'to' LTP of this connectivity matrix entry can be
    selected as secondary LTPs.";
  leaf ltp-ref {
    type leafref {
      path ".../.../.../.../.../nt:termination-point/nt:tp-id";
    }
    description
      "The reference to the potential secondary LTP that can be
      selected when the 'from' LTP of this connectivity matrix
      entry is selected as a working LTP";
  }
  leaf roadm-path-impairments-set {
    type leafref {
      path ".../.../.../.../.../.../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
  }
}

```

```

    }
    description
      "Pointer to ROADM optical impairments of the ROADM path
      between this secondary 'from' LTP and the 'to' LTP of
      this connectivity matrix entry.";
  }
}
} // augmentation connectivity-matrix from

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:te-node-attributes/tet:connectivity-matrices/"
  + "tet:connectivity-matrix/tet:to" {
  when '../.../nw:network-types/tet:te-topology/'
  + 'oit:optical-impairment-topology' {
    description
      "This augment is only valid for
      Optical Impairment topology ";
  }
  description
    "Augment the attributes for the 'to' LTP for the TE node
    connectivity matrix entry.";
  list additional-ltp {
    when "derived-from-or-self(../.../nt:termination-point"
      + "[nt:tp-id=current()/../tet:from/tet:tp-ref]/"
      + "oit:protection-type,"
      + "'oit:otsi-protection')" {
      description
        "This list applies only when the 'from' LTP for this
        connectivity matrix entry supports individual OTSi(G)
        protection.";
    }
    key "ltp-ref";
    config false;
    description
      "The restricted list of the potential secondary LTPs that
      can be selected when the 'to' LTP of this connectivity
      matrix entry is selected as a working LTP.

      If this list is empty, all the other LTPs that can be
      reached from the 'from' LTP of this connectivity matrix
      entry can be selected as secondary LTPs.";
    leaf ltp-ref {
      type leafref {
        path "../.../nt:termination-point/nt:tp-id";
      }
      description
        "The reference to the potential secondary LTP that can be

```

```

        selected when the 'to' LTP of this connectivity matrix
        entry is selected as a working LTP";
    }
    leaf roadm-path-impairments-set {
        type leafref {
            path "../../../../../oit:templates"
                + "/oit:roadm-path-impairments-sets"
                + "/oit:roadm-path-impairments-set"
                + "/oit:roadm-path-impairments-set-id";
        }
        description
            "Pointer to ROADM optical impairments of the ROADM path
            between the 'from' LTP of this connectivity matrix entry
            and this secondary LTP.";
    }
}
} // augmentation connectivity-matrix to

augment "/nw:networks/nw:network/nw:node/tet:te/"
    + "tet:tunnel-termination-point/"
    + "tet:local-link-connectivities" {
    when '../../../../../nw:network-types/tet:te-topology/'
        + 'oit:optical-impairment-topology' {
        description
            "This augment is only valid for Optical Impairment
            topology.";
    }
    description
        "Augment default TTP LLC.";
    leaf add-path-impairments-set {
        type leafref {
            path "../../../../../oit:templates"
                + "/oit:roadm-path-impairments-sets"
                + "/oit:roadm-path-impairments-set"
                + "/oit:roadm-path-impairments-set-id";
        }
        config false;
        description
            "Pointer to the list set of ROADM optical
            impairments";
    }
    leaf drop-path-impairments-set {
        type leafref {
            path "../../../../../oit:templates"
                + "/oit:roadm-path-impairments-sets"
                + "/oit:roadm-path-impairments-set"
                + "/oit:roadm-path-impairments-set-id";
        }
    }
}

```

```
    config false;
    description
      "pointer to the list set of ROADM
       optical impairments";
  }
} // augmentation local-link-connectivities

augment "/nw:networks/nw:network/nw:node/tet:te/"
  + "tet:tunnel-termination-point/"
  + "tet:local-link-connectivities/"
  + "tet:local-link-connectivity" {
when '../.../.../.../nw:network-types/tet:te-topology/'
  + 'oit:optical-impairment-topology' {
  description
    "This augment is only valid for
     Optical Impairment topology ";
}
description
  "Augment TTP LLC entry.";
leaf add-path-impairments-set {
  type leafref {
    path "../.../.../.../oit:templates"
      + "/oit:roadm-path-impairments-sets"
      + "/oit:roadm-path-impairments-set"
      + "/oit:roadm-path-impairments-set-id";
  }
  config false;
  description
    "pointer to the list set of ROADM optical
     impairments";
}
leaf drop-path-impairments-set {
  type leafref {
    path "../.../.../.../oit:templates"
      + "/oit:roadm-path-impairments-sets"
      + "/oit:roadm-path-impairments-set"
      + "/oit:roadm-path-impairments-set-id";
  }
  config false;
  description
    "pointer to the list set of ROADM optical
     impairments";
}
list llc-transceiver {
  key "ttp-transponder-ref ttp-transceiver-ref";
  config false;
  description
    "The list of transceivers having a LLC different from the
```



```
    default LLC.";
  leaf ttp-transponder-ref {
    type leafref {
      path "../../../../../ttp-transceiver/transponder-ref";
    }
    description
      "The reference to the transponder hosting the transceiver
      of this LLCL entry.";
  }
  leaf ttp-transceiver-ref {
    type leafref {
      path "../../../../../ttp-transceiver/transceiver-ref";
    }
    description
      "The reference to the the transceiver of this LLCL entry.";
  }
  leaf is-allowed {
    type boolean;
    description
      "'true' - connectivity from this transceiver is allowed;
      'false' - connectivity from this transceiver is
      disallowed.";
  }
  leaf add-path-impairments-set {
    type leafref {
      path "../../../../../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    description
      "pointer to the list set of ROADM optical
      impairments";
  }
  leaf drop-path-impairments-set {
    type leafref {
      path "../../../../../oit:templates"
        + "/oit:roadm-path-impairments-sets"
        + "/oit:roadm-path-impairments-set"
        + "/oit:roadm-path-impairments-set-id";
    }
    description
      "pointer to the list set of ROADM
      optical impairments";
  }
}
list additional-ltp {
  when "derived-from-or-self(../../../../../tet:protection-type, "
```

```

    + "'oit:otsi-protection')" {
    description
      "This list applies only to TTPs that support individual
      OTSi(G) protection.";
    }
    key "ltp-ref";
    config false;
    description
      "The restricted list of the potential secondary LTPs that
      can be selected when the LTP associated with this LLCP
      entry is selected as a working LTP.

      If this list is empty, all the other LTPs that can be
      reached by this TTP can be selected as secondary LTPs.";
    leaf ltp-ref {
      type leafref {
        path "../.../nt:termination-point/nt:tp-id";
      }
      description
        "The reference to potential secondary LTP that can be
        selected when the LTP associated with this LLCP entry is
        selected as a working LTP";
    }
    leaf add-path-impairments-set {
      type leafref {
        path "../.../oit:templates"
          + "/oit:roadm-path-impairments-sets"
          + "/oit:roadm-path-impairments-set"
          + "/oit:roadm-path-impairments-set-id";
      }
      description
        "pointer to the list set of ROADM optical
        impairments";
    }
    leaf drop-path-impairments-set {
      type leafref {
        path "../.../oit:templates"
          + "/oit:roadm-path-impairments-sets"
          + "/oit:roadm-path-impairments-set"
          + "/oit:roadm-path-impairments-set-id";
      }
      description
        "pointer to the list set of ROADM
        optical impairments";
    }
  }
} // augmentation local-link-connectivity

```

```
}  
<CODE ENDS>
```

5. Security Considerations

The YANG module specified in this document defines a schema for data that is designed to be accessed via network management protocols such as NETCONF [RFC6241] or RESTCONF [RFC8040]. The lowest NETCONF layer is the secure transport layer, and the mandatory-to-implement secure transport is Secure Shell (SSH) [RFC6242]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [RFC8446].

The Network Configuration Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

The YANG module specified in this document imports the ietf-network and ietf-network-topology models defined in [RFC8345]. This YANG module augments te-topology defined in [RFC8795] and consequently inherits te-topology subtrees and data nodes and their potential sensitivities and vulnerabilities. Therefore, the security considerations from [RFC8345] also apply to the YANG module defined in this document.

The data nodes defined in this YANG module are not writable/creatable/deletable (i.e., "config true", which is the default) and are therefore only readable (i.e., config false). Although the data nodes are not susceptible to write operations or attacks (for instance, thought "edit-config"), some data nodes accessible for reading might be considered sensitive or prone to vulnerabilities as they expose network topology information, which may be confidential information for some operators. Therefore, it is critical to manage access to these readable nodes carefully (for instance, through "get", "get-config", or "notification" commands) to safeguard them.

These are the subtrees and data nodes and their sensitivity/vulnerability:

```
/nw:networks/nw:network/nw:network-types/tet:te-topology  
  Unauthorized access to this subtree can disclose the TE topology  
  type.
```

```
/nw:networks/tet:te  
  Unauthorized access to this subtree can disclose the TE node  
  templates and TE link templates.
```

/nw:networks/nw:network
Unauthorized access to this subtree can disclose the topology-wide configurations, including the TE topology ID, the topology-wide policies, and the topology geolocation.

/nw:networks/nw:network/nw:node
Unauthorized access to this subtree can disclose the operational state information of TE nodes.

/nw:networks/nw:network/nt:link/tet:te
Unauthorized access to this subtree can disclose the operational state information of TE links.

/nw:networks/nw:network/nw:node/nt:termination-point
Unauthorized access to this subtree can disclose the operational state information of TE link termination points.

/nw:networks/nw:network/nt:link/tet:te/tet:te-link-attributes
Unauthorized access to this subtree can disclose the operational state information of TE link attributes.

/nw:networks/nw:network/nw:node/tet:te/tet:tunnel-termination-point
Unauthorized access to this subtree can disclose the operational state information of TE link tunnel termination points.

/nw:networks/nw:network/nw:node/tet:te/tet:te-node-attributes
Unauthorized access to this subtree can disclose the operational state information of TE node attributes.

6. IANA Considerations

This document registers the following namespace URIs in the IETF XML registry [RFC3688]:

URI: urn:ietf:params:xml:ns:yang:ietf-optical-impairment-topology
Registrant Contact: The IESG.
XML: N/A, the requested URI is an XML namespace.

This document registers the following YANG modules in the YANG Module Names registry [RFC7950]:

```
-----  
name:      ietf-optical-impairment-topology  
namespace: urn:ietf:params:xml:ns:yang:ietf-optical-impairment-  
topology  
prefix:    oit  
reference: RFC XXXX (TDB)  
-----
```

7. Acknowledgments

We thank Daniele Ceccarelli and Oscar G. De Dios for useful discussions and motivation for this work.

8. References

8.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, DOI 10.17487/RFC6242, June 2011, <<https://www.rfc-editor.org/info/rfc6242>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, RFC 8341, DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8345] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., and X. Liu, "A YANG Data Model for Network Topologies", RFC 8345, DOI 10.17487/RFC8345, March 2018, <<https://www.rfc-editor.org/info/rfc8345>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [I-D.ietf-teas-rfc8776-update]
Busi, I., Guo, A., Liu, X., Saad, T., and I. Bryskin, "Common YANG Data Types for Traffic Engineering", Work in Progress, Internet-Draft, draft-ietf-teas-rfc8776-update-18, 29 August 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-rfc8776-update-18>>.
- [RFC8795] Liu, X., Bryskin, I., Beeram, V., Saad, T., Shah, H., and O. Gonzalez de Dios, "YANG Data Model for Traffic Engineering (TE) Topologies", RFC 8795, DOI 10.17487/RFC8795, August 2020, <<https://www.rfc-editor.org/info/rfc8795>>.
- [I-D.ietf-ccamp-rfc9093-bis]
Belotti, S., Busi, I., Beller, D., Rouzic, E. L., and A. Guo, "Common YANG Data Types for Layer 0 Optical Networks", Work in Progress, Internet-Draft, draft-ietf-ccamp-rfc9093-bis-18, 10 October 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-rfc9093-bis-18>>.

8.2. Informative References

- [RFC6566] Lee, Y., Ed., Bernstein, G., Ed., Li, D., and G. Martinelli, "A Framework for the Control of Wavelength Switched Optical Networks (WSNs) with Impairments", RFC 6566, DOI 10.17487/RFC6566, March 2012, <<https://www.rfc-editor.org/info/rfc6566>>.

- [RFC7446] Lee, Y., Ed., Bernstein, G., Ed., Li, D., and W. Imajuku, "Routing and Wavelength Assignment Information Model for Wavelength Switched Optical Networks", RFC 7446, DOI 10.17487/RFC7446, February 2015, <<https://www.rfc-editor.org/info/rfc7446>>.
- [RFC7579] Bernstein, G., Ed., Lee, Y., Ed., Li, D., Imajuku, W., and J. Han, "General Network Element Constraint Encoding for GMPLS-Controlled Networks", RFC 7579, DOI 10.17487/RFC7579, June 2015, <<https://www.rfc-editor.org/info/rfc7579>>.
- [RFC7581] Bernstein, G., Ed., Lee, Y., Ed., Li, D., Imajuku, W., and J. Han, "Routing and Wavelength Assignment Information Encoding for Wavelength Switched Optical Networks", RFC 7581, DOI 10.17487/RFC7581, June 2015, <<https://www.rfc-editor.org/info/rfc7581>>.
- [RFC7698] Gonzalez de Dios, O., Ed., Casellas, R., Ed., Zhang, F., Fu, X., Ceccarelli, D., and I. Hussain, "Framework and Requirements for GMPLS-Based Control of Flexi-Grid Dense Wavelength Division Multiplexing (DWDM) Networks", RFC 7698, DOI 10.17487/RFC7698, November 2015, <<https://www.rfc-editor.org/info/rfc7698>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", RFC 8342, DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/info/rfc8342>>.
- [RFC8453] Ceccarelli, D., Ed. and Y. Lee, Ed., "Framework for Abstraction and Control of TE Networks (ACTN)", RFC 8453, DOI 10.17487/RFC8453, August 2018, <<https://www.rfc-editor.org/info/rfc8453>>.
- [RFC8792] Watsen, K., Auerswald, E., Farrel, A., and Q. Wu, "Handling Long Lines in Content of Internet-Drafts and RFCs", RFC 8792, DOI 10.17487/RFC8792, June 2020, <<https://www.rfc-editor.org/info/rfc8792>>.
- [RFC8969] Wu, Q., Ed., Boucadair, M., Ed., Lopez, D., Xie, C., and L. Geng, "A Framework for Automating Service and Network Management with YANG", RFC 8969, DOI 10.17487/RFC8969, January 2021, <<https://www.rfc-editor.org/info/rfc8969>>.

- [RFC9094] Zheng, H., Lee, Y., Guo, A., Lopez, V., and D. King, "A YANG Data Model for Wavelength Switched Optical Networks (WSONs)", RFC 9094, DOI 10.17487/RFC9094, August 2021, <<https://www.rfc-editor.org/info/rfc9094>>.
- [I-D.ietf-ccamp-dwdm-if-param-yang]
Galimberti, G., Hiremagalur, D., Grammel, G., Manzotti, R., and D. Breuer, "A YANG data model to manage configurable DWDM optical interfaces", Work in Progress, Internet-Draft, draft-ietf-ccamp-dwdm-if-param-yang-13, 7 July 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-dwdm-if-param-yang-13>>.
- [I-D.ietf-teas-te-topo-and-tunnel-modeling]
Bryskin, I., Beeram, V. P., Saad, T., and X. Liu, "TE Topology and Tunnel Modeling for Transport Networks", Work in Progress, Internet-Draft, draft-ietf-teas-te-topo-and-tunnel-modeling-06, 12 July 2020, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-te-topo-and-tunnel-modeling-06>>.
- [G.672] "Characteristics of multi-degree reconfigurable optical add/drop multiplexers", ITU-T Recommendation G.672, October 2020.
- [G.680] "Physical transfer functions of optical network elements", ITU-T Recommendation G.680, July 2007.
- [G.807] "Generic functional architecture of the optical media network", ITU-T Recommendation G.807, February 2020.
- [G.807_Amd1]
"Generic functional architecture of the optical media network Amendment 1", ITU-T Recommendation G.807 Amendment 1, January 2021.
- [G.873.1_Amd1]
"Optical transport network: Linear protection Amendment 1", ITU-T Recommendation G.873.1 Amendment 1, February 2022.
- [G.709] "Interfaces for the Optical Transport Network (OTN)", ITU-T Recommendation G.709, June 2016.
- [G.694.1] "Spectral grids for WDM applications: DWDM frequency grid", ITU-T Recommendation G.694.1, February 2012.

- [G.959.1] "Optical transport network physical layer interfaces",
ITU-T Recommendation G.959.1, February 2012.
- [G.872] "Architecture of optical transport networks",
ITU-T Recommendation G.872, December 2019.
- [G.698.2] "Amplified multichannel dense wavelength division
multiplexing applications with single channel optical
interfaces", ITU-T Recommendation G.698.2, November 2018.
- [G.798.1] "Types and characteristics of optical transport network
equipment", ITU-T Recommendation G.798.1, January 2013.
- [G.873.1] "Optical transport network: Linear protection",
ITU-T Recommendation G.873.1, October 2017.
- [OpenROADM]
"OpenROADM Multi-Source Agreement (MSA) -
<http://openroadm.org>".

Appendix A. JSON Code Examples for Optical Protection Uses Cases

- (1) JSON example for use case in Section 2.11.1.1 with full and with
restricted connectivity:

The JSON example below addresses the optical protection use case for
TTPs associated with local optical transponders (integrated WDM-TE-
node):

- * where full connectivity exists between the ROADM add-drop ports
and the ROADM ports for the different ROADM degrees illustrated in
Figure 27 below.
- * where restricted connectivity exists between the ROADM add-drop
ports and the ROADM ports for the different ROADM degrees
illustrated in Figure 28 below.

Note that Figure 27 and Figure 28 illustrate the connectivity for a
single TTP only, i.e., the figures are not showing TTP-1, TTP-2, TTP-
3, and TTP-4, which are used in the JSON code example below.

The connectivity is reflected in the local-link-connectivities
between the TTP associated with the transceiver of the local OT and
the LTPs that can be reached including the optical impairments for
the different paths.

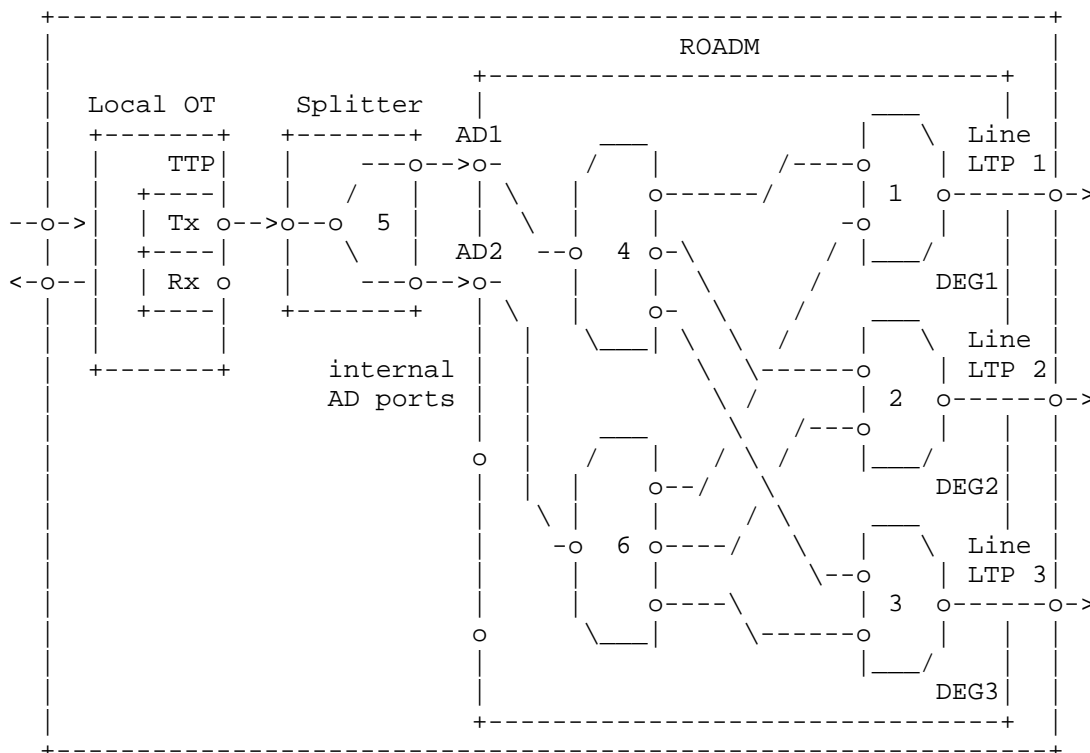


Figure 27: Protected TTP with Full Connectivity between ROADM Add-Drop Ports and ROADM Degree Ports

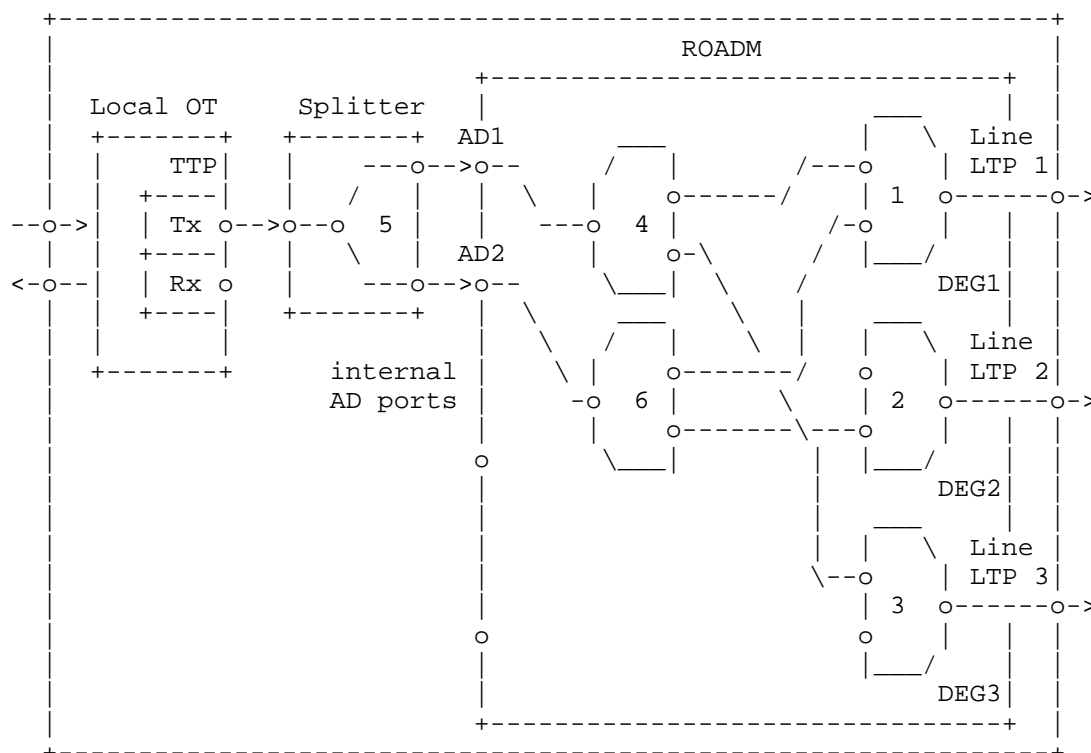


Figure 28: Protected TTP with Restricted Connectivity between ROADM Add-Drop Ports and ROADM Degree Ports

```
{
  "ietf-network:networks": {
    "network": [
      {
        "network-id": "WDM-Network-2",
        "network-types": {
          "ietf-te-topology:te-topology": {
            "ietf-optical-impairment-topology:optical-impairment-topology": {}
          },
          "ietf-te-topology:te-topology-identifier": {
            "topology-id": "WDM-Network-1"
          },
          "ietf-te-topology:te": {},
          "ietf-optical-impairment-topology:templates": {
            "roadm-path-impairments-sets": {}
          }
        }
      }
    ]
  }
}
```

```

    "roadm-path-impairments-set": [
      {
        "roadm-path-impairments-set-id": "1",
        "description": "Add path impairments from TTP 1 \
\or TTP 2 to any LTP",
        "roadm-add-path": [
          {
            "frequency-range-id": 0,
            "frequency-range": {
              "lower-frequency": "191.3",
              "upper-frequency": "196.1"
            }
          }
        ]
      },
      {
        "roadm-path-impairments-set-id": "2",
        "description": "Add path impairments from TTP 3\
\ or TTP 4 to LTP1 or LTP3, thorough AD1",
        "roadm-add-path": [
          {
            "frequency-range-id": 0,
            "frequency-range": {
              "lower-frequency": "191.3",
              "upper-frequency": "196.1"
            }
          }
        ]
      },
      {
        "roadm-path-impairments-set-id": "3",
        "description": "Add path impairments from TTP 3 \
\or TTP 4 to LTP1 or LTP2, thorough AD2",
        "roadm-add-path": [
          {
            "frequency-range-id": 0,
            "frequency-range": {
              "lower-frequency": "191.3",
              "upper-frequency": "196.1"
            }
          }
        ]
      }
    ]
  }

```

```

    },
    "node": [
      {
        "node-id": "WDM-TE-Node-1",
        "ietf-te-topology:te-node-id": "192.0.2.1",
        "ietf-te-topology:te": {
          "tunnel-termination-point": [
            {
              "tunnel-tp-id": "MQ==",
              "protection-type": "ietf-optical-impairment-topolo\
\gy:otsi-protection",
              "local-link-connectivities": {
                "is-allowed": true,
                "ietf-optical-impairment-topology:add-path-impai\
\rmments-set": "1"
              }
            },
            {
              "tunnel-tp-id": "Mg==",
              "protection-type": "ietf-optical-impairment-topolo\
\gy:otsi-protection",
              "local-link-connectivities": {
                "is-allowed": true,
                "ietf-optical-impairment-topology:add-path-impai\
\rmments-set": "1",
                "local-link-connectivity": [
                  {
                    "link-tp-ref": "LTP-1",
                    "ietf-optical-impairment-topology:additional\
\ltp": [
                      {
                        "ltp-ref": "LTP-2"
                      },
                      {
                        "ltp-ref": "LTP-3"
                      }
                    ]
                  },
                  {
                    "link-tp-ref": "LTP-2",
                    "ietf-optical-impairment-topology:additional\
\ltp": [
                      {
                        "ltp-ref": "LTP-1"
                      },
                      {
                        "ltp-ref": "LTP-3"
                      }
                    ]
                  }
                ]
              }
            }
          ]
        }
      ]
    ]
  }

```

```

    ]
  },
  {
    "link-tp-ref": "LTP-3",
    "ietf-optical-impairment-topology:additional\
\ltp": [
      {
        "ltp-ref": "LTP-1"
      }, {
        "ltp-ref": "LTP-2"
      }
    ]
  }
]
},
{
  "tunnel-tp-id": "Mw==",
  "protection-type": "ietf-optical-impairment-topolo\
\gy:otsi-protection",
  "local-link-connectivities": {
    "is-allowed": false,
    "local-link-connectivity": [
      {
        "link-tp-ref": "LTP-1",
        "is-allowed": true,
        "ietf-optical-impairment-topology:add-path-i\
\mpairments-set": "2",
        "ietf-optical-impairment-topology:additional\
\ltp": [
          {
            "ltp-ref": "LTP-3",
            "add-path-impairments-set": "2"
          },
          {
            "ltp-ref": "LTP-2",
            "add-path-impairments-set": "3"
          }
        ]
      },
      {
        "link-tp-ref": "LTP-3",
        "is-allowed": true,
        "ietf-optical-impairment-topology:add-path-i\
\mpairments-set": "2",
        "ietf-optical-impairment-topology:additional\
\ltp": [
          {

```

```

        "ltp-ref": "LTP-1",
        "add-path-impairments-set": "3"
      },
      {
        "ltp-ref": "LTP-2",
        "add-path-impairments-set": "3"
      }
    ]
  }
]
}
},
{
  "tunnel-tp-id": "NA==",
  "protection-type": "ietf-optical-impairment-topolo\
\gy:otsi-protection",
  "local-link-connectivities": {
    "is-allowed": false,
    "local-link-connectivity": [
      {
        "link-tp-ref": "LTP-1",
        "is-allowed": true,
        "ietf-optical-impairment-topology:add-path-i\
\mpairments-set": "3",
        "ietf-optical-impairment-topology:additional\
\ltp": [
          {
            "ltp-ref": "LTP-3",
            "add-path-impairments-set": "2"
          },
          {
            "ltp-ref": "LTP-2",
            "add-path-impairments-set": "3"
          }
        ]
      },
      {
        "link-tp-ref": "LTP-2",
        "is-allowed": true,
        "ietf-optical-impairment-topology:add-path-i\
\mpairments-set": "3",
        "ietf-optical-impairment-topology:additional\
\ltp": [
          {
            "ltp-ref": "LTP-1",
            "add-path-impairments-set": "3"
          },
          {

```

```

        "ltp-ref": "LTP-3",
        "add-path-impairments-set": "2"
    }
}
},
{
    "link-tp-ref": "LTP-3",
    "is-allowed": true,
    "ietf-optical-impairment-topology:add-path-i\
mpairments-set": "2",
    "ietf-optical-impairment-topology:additional\
-ltp": [
        {
            "ltp-ref": "LTP-1",
            "add-path-impairments-set": "3"
        },
        {
            "ltp-ref": "LTP-2",
            "add-path-impairments-set": "3"
        }
    ]
}
]
}
}
]
},
"ietf-network-topology:termination-point": [
    {
        "tp-id": "LTP-1"
    },
    {
        "tp-id": "LTP-2"
    },
    {
        "tp-id": "LTP-3"
    }
]
}
]
}
]
}
}

```

- (2) JSON example for use case in Section 2.11.1.2 with restricted connectivity:

The JSON example below addresses the optical protection use case where the optical transponder is not part of the WDM-TE-node containing the ROADM function (WDM-TE-Node-2) but is part of a separate WDM-TE-node (WDM-TE-Node-1) containing one or more optical transponders (remote OTs). As described in Section 2.11.1.2, a TE-link interconnects the remote OT with an add-drop port of WDM-TE-Node-2. This is illustrated in Figure 29.

In this use case, the connectivity is reflected in the connectivity-matrix describing the connectivity between the LTPs representing an add-drop port in WDM-TE-Node-2 connected to the transceiver of a remote OT and the LTPs associated with the different ROADM degrees including the optical impairments for the different paths.

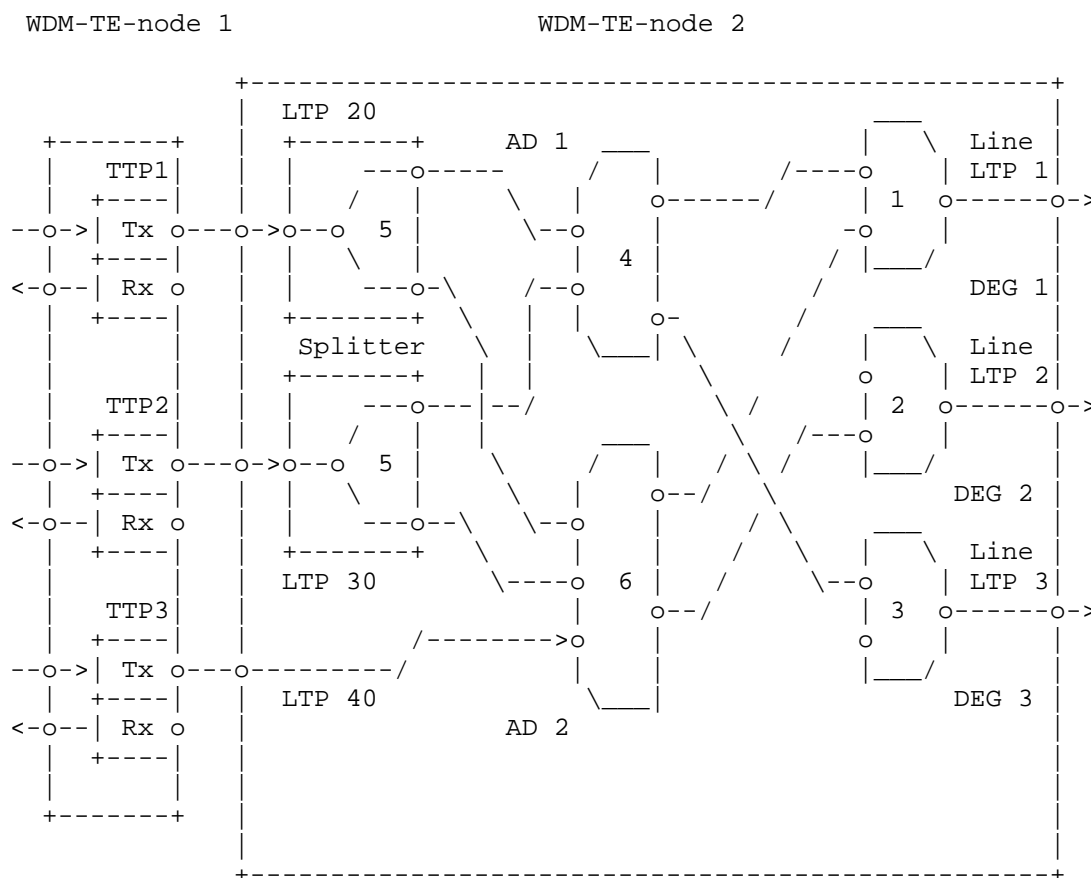


Figure 29: JSON Example for Restricted Connectivity between ROADM Add-Drop Ports and ROADM Degree Ports

```

{
  "ietf-network:networks": {
    "network": [
      {
        "network-id": "WDM-Network-2",
        "network-types": {
          "ietf-te-topology:te-topology": {
            "ietf-optical-impairment-topology:optical-impairment-top\
ology": {}
          },
          "ietf-te-topology:te-topology-identifier": {
            "topology-id": "WDM-Network-1"
          },
          "ietf-te-topology:te": {},
          "ietf-optical-impairment-topology:templates": {
            "roadm-path-impairments-sets": {
              "roadm-path-impairments-set": [
                {
                  "roadm-path-impairments-set-id": "1",

                  "roadm-add-path": [
                    {
                      "frequency-range-id": 0,
                      "frequency-range": {
                        "lower-frequency": "191.3",
                        "upper-frequency": "196.1"
                      }
                    }
                  ]
                },
                {
                  "roadm-path-impairments-set-id": "2",
                  "description": "Add path impairments from LTP 20\
\ or LTP 30 to LTP 1 or LTP3, through AD1",

                  "roadm-add-path": [
                    {
                      "frequency-range-id": 0,
                      "frequency-range": {
                        "lower-frequency": "191.3",
                        "upper-frequency": "196.1"
                      }
                    }
                  ]
                },
                {
                  "roadm-path-impairments-set-id": "3",

```

```

        "description": "Add path impairments from LTP 20\
\ or LTP 30 or LTP 40 to LTP 1 or LTP 2, through AD2",

        "roadm-add-path": [
            {
                "frequency-range-id": 0,
                "frequency-range": {
                    "lower-frequency": "191.3",
                    "upper-frequency": "196.1"
                }
            }
        ]
    }
}
},
"node": [
    {
        "node-id": "WDM-TE-Node-1",
        "ietf-te-topology:te-node-id": "192.0.2.1",
        "ietf-te-topology:te": {
            "te-node-attributes": {
                "connectivity-matrices": {
                    "connectivity-matrix": [
                        {
                            "id": 1,
                            "from": {
                                "tp-ref": "20"
                            },
                            "to": {
                                "tp-ref": "1",
                                "ietf-optical-impairment-topology:add\
\itional-ltp": [
                                    {
                                        "ltp-ref": "1",
                                        "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
                                    },
                                    {
                                        "ltp-ref": "2",
                                        "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
                                    }
                                ]
                            },
                            "is-allowed": true,
                            "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "2"
                        }
                    ]
                }
            }
        }
    ]
}
},

```

```

    },
    {
      "id": 2,
      "from": {
        "tp-ref": "20"
      },
      "to": {
        "tp-ref": "3",
        "ietf-optical-impairment-topology:add\
\itional-ltp": [
          {
            "ltp-ref": "1",
            "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
          },
          {
            "ltp-ref": "2",
            "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
          }
        ]
      },
      "is-allowed": true,
      "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "2"
    },
    {
      "id": 3,
      "from": {
        "tp-ref": "30"
      },
      "to": {
        "tp-ref": "1",
        "ietf-optical-impairment-topology:add\
\itional-ltp": [
          {
            "ltp-ref": "1",
            "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
          },
          {
            "ltp-ref": "2",
            "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
          }
        ]
      },
      "is-allowed": true,

```

```

    "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "2"
    },
    {
        "id": 4,
        "from": {
            "tp-ref": "30"
        },
        "to": {
            "tp-ref": "2",
            "ietf-optical-impairment-topology:add\
\itional-ltp": [
                {
                    "ltp-ref": "1",
                    "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "2"
                },
                {
                    "ltp-ref": "3",
                    "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "2"
                }
            ]
        },
        "is-allowed": true,
        "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "3"
    },
    {
        "id": 5,
        "from": {
            "tp-ref": "30"
        },
        "to": {
            "tp-ref": "3",
            "ietf-optical-impairment-topology:add\
\itional-ltp": [
                {
                    "ltp-ref": "1",
                    "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
                },
                {
                    "ltp-ref": "2",
                    "ietf-optical-impairment-topolog\
\y:roadm-path-impairments-set": "3"
                }
            ]
        }
    }
]

```

```

    },
    "is-allowed": true,
    "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "2"
    },
    {
        "id": 6,
        "from": {
            "tp-ref": "40"
        },
        "to": {
            "tp-ref": "1"
        },
        "is-allowed": true,
        "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "3"
    },
    {
        "id": 7,
        "from": {
            "tp-ref": "40"
        },
        "to": {
            "tp-ref": "2"
        },
        "is-allowed": true,
        "ietf-optical-impairment-topology:roadm-\
\path-impairments-set": "3"
    }
    ]
}
},
"ietf-network-topology:termination-point": [
    {
        "tp-id": "20",
        "ietf-optical-impairment-topology:protection-type": \
\"ietf-optical-impairment-topology:otsi-protection"
    },
    {
        "tp-id": "30",
        "ietf-optical-impairment-topology:protection-type": \
\"ietf-optical-impairment-topology:otsi-protection"
    },
    {
        "tp-id": "40"
    },
    {

```

```

        "tp-id": "1",
        "ietf-optical-impairment-topology:protection-type": \
\"ietf-optical-impairment-topology:otsi-protection"
    },
    {
        "tp-id": "2",
        "ietf-optical-impairment-topology:protection-type": \
\"ietf-optical-impairment-topology:otsi-protection"
    },
    {
        "tp-id": "3",
        "ietf-optical-impairment-topology:protection-type": \
\"ietf-optical-impairment-topology:otsi-protection"
    }
]
}
]
}
}
}

```

Appendix B. Optical Transponders in a Remote Shelf (Remote OTs)

Figure 30 illustrates a configuration where the optical transponders and the ROADM are located in a different WDM-TE-nodes.

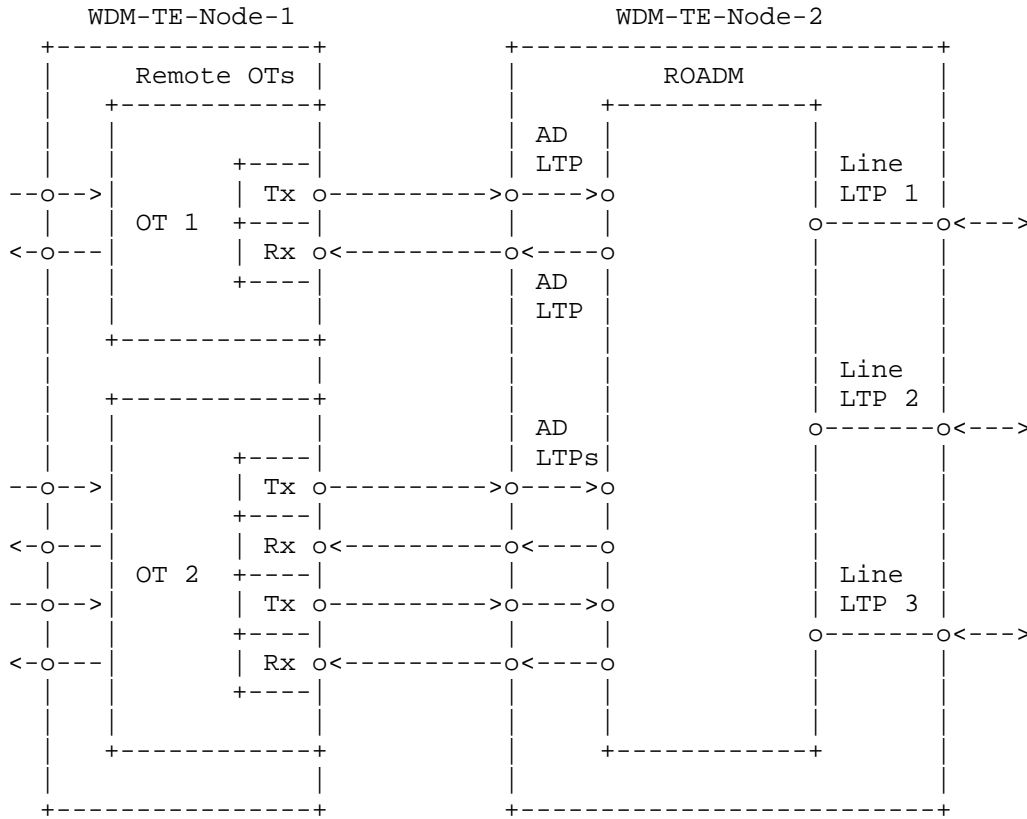


Figure 30: Optical Transponders in a Remote Shelf (Remote OTs)

As described in Section 2.3, the external shelf can be modeled as WDM-TE-Node with termination capability only (not switching) and the add/drop link between a remote optical transceiver and a ROADM add/drop port can be modeled as a WDM TE-link with the same optical impairments as those defined for a WDM TE-link between WDM-TE-nodes (OMS MCG).

If the two WDM-TE-Nodes are reported in different network topology instances, the plug-id attribute, defined in [RFC8795], can be used to discover the adjacency for add/drop TE-links.

It is worth noting that there are no standard protocols for automatic discovery of the adjacency between an external transceiver and a ROADM add/drop port and therefore the information reported in the plug-id can be either statically configured or provided through vendor-specific discovery mechanisms.

Each add/drop TE-link carries a single OTSi between the transceiver and ROADM add/drop port and one or more OTSis in the reverse direction (between the ROADM add/drop and the transceiver).

Depending on control architecture (e.g., when the two WDM-TE-Nodes are reported in different network topology instances by different controllers), the controller reporting the WDM-TE-Node, abstracting the external OT shelf, may be not able to provide the information about the end-to-end MC configuration (i.e., flexi-n and flexi-m) nor of all the received OTSis, within the end-to-end MC, besides the configured incoming OTSi, since the end-to-end MC configuration depends on how the ROADM network is configured and the remote OT shelf is not aware of that.

In this case only the incoming-otsi and outgoing-otsi can be reported within an end-to-end MC with an unspecified frequency-slot (i.e., without reporting flexi-n and flexi-m configuration of the end-to-end MC).

When an OTSiG has more than one OTSi, its OTSis are carried by different parallel add/drop TE-links. In order to represent the fact that these OTSis are co-routed, the add/drop TE-links are bundled together in a bundled add/drop TE-link. The finest granularity for the bundled add/drop TE-link is the set of all the add/drop TE-links terminating on the same OT.

For example, in Figure 30, it is possible to define two bundled add/drop TE-links, one for OT1 and one for OT2 or just one add/drop TE-link both OTs.

The model for a bundled add/drop TE-link and the relationship with its component TE-links is already defined in the bundled-links container of [RFC8795].

In the general case, the optical impairments and connectivity constraints are reported for each add/drop TE-link and therefore no optical impairments are reported in the bundled add/drop TE-link that is used just to model the co-routing aspects of the OTSis belonging to the same OTSiG.

The per-transceiver Local Link Connectivity (LLC) is used in the WDM-TE-Node which abstracts the remote OT shelf (e.g., WDM-TE-Node-1 in Figure 30), to represent the association between each transceiver and each LTP terminating the add/drop TE-link which models the transceiver port.

The connectivity matrix in the WDM-TE-Node which abstract the edge ROADM (e.g., WDM-TE-Node-2 in Figure 30) references the LTPs terminating the add/drop TE-links which models the ROADM add/drop ports.

B.1. JSON Examples for Optical Transponders in a Remote Shelf (Remote OTs)

The JSON example below describes a topology where the optical transponders are located in a remote WDM-TE-Node as depicted in Figure 30).

Line-folding as defined in [RFC8792] has been used for the JSON code example below.

```
{
  "ietf-network:networks": {
    "network": [
      {
        "network-id": "WDM-Network-1",
        "network-types": {
          "ietf-te-topology:te-topology": {
            "ietf-optical-impairment-topology:optical-impairment-topology": {}
          },
          "ietf-te-topology:te-topology-identifier": {
            "topology-id": "WDM-Network-1"
          },
          "ietf-te-topology:te": {},
          "ietf-optical-impairment-topology:otsis": {
            "otsi-group": [
              {
                "otsi-group-id": "Red OTSiG (Forward)",
                "otsi": [
                  {
                    "carrier-id": 1
                  }
                ]
              },
              {
                "otsi-group-id": "Red OTSiG (Reverse)",
                "otsi": [
                  {
                    "carrier-id": 1
                  }
                ]
              }
            ]
          }
        }
      }
    ]
  }
}
```

```

    {
      "otsi-group-id": "Green OTSiG (Forward)",
      "otsi": [
        {
          "carrier-id": 1
        },
        {
          "carrier-id": 2
        }
      ]
    },
    {
      "otsi-group-id": "Green OTSiG (Reverse)",
      "otsi": [
        {
          "carrier-id": 1
        },
        {
          "carrier-id": 2
        }
      ]
    }
  ],
  "node": [
    {
      "node-id": "WDM-TE-Node-1",
      "ietf-te-topology:te-node-id": "192.0.2.1",
      "ietf-te-topology:te": {
        "ietf-te-topology:tunnel-termination-point": [
          {
            "tunnel-tp-id": "AQ==",
            "ietf-optical-impairment-topology:ttp-transceiver"\\: [
              {
                "transponder-ref": 1,
                "transceiver-ref": 1
              }
            ],
            "local-link-connectivities": {
              "is-allowed": false,
              "local-link-connectivity": [
                {
                  "link-tp-ref": "1",
                  "ietf-optical-impairment-topology:llc-transc\\eiver": [
                    {
                      "ttp-transponder-ref": 1,

```

```

        "ttp-transceiver-ref": 1,
        "is-allowed": true
    }
  ]
}
},
{
  "tunnel-tp-id": "Ag==",
  "ietf-optical-impairment-topology:ttp-transceiver"\
\:: [
    {
      "transponder-ref": 2,
      "transceiver-ref": 1
    },
    {
      "transponder-ref": 2,
      "transceiver-ref": 2
    }
  ],
  "local-link-connectivities": {
    "is-allowed": false,
    "local-link-connectivity": [
      {
        "link-tp-ref": "2",
        "ietf-optical-impairment-topology:llc-transc\
\ceiver": [
          {
            "ttp-transponder-ref": 2,
            "ttp-transceiver-ref": 1,
            "is-allowed": true
          }
        ]
      },
      {
        "link-tp-ref": "3",
        "ietf-optical-impairment-topology:llc-transc\
\ceiver": [
          {
            "ttp-transponder-ref": 2,
            "ttp-transceiver-ref": 2,
            "is-allowed": true
          }
        ]
      }
    ]
  }
}

```

```

    }
  ]
},
"ietf-network-topology:termination-point": [
  {
    "tp-id": "1",
    "ietf-te-topology:te-tp-id": 1,
    "ietf-te-topology:te": {
      "inter-domain-plug-id": "AQ=="
    }
  },
  {
    "tp-id": "2",
    "ietf-te-topology:te-tp-id": 2,
    "ietf-te-topology:te": {
      "inter-domain-plug-id": "Ag=="
    }
  },
  {
    "tp-id": "3",
    "ietf-te-topology:te-tp-id": 3,
    "ietf-te-topology:te": {
      "inter-domain-plug-id": "Awo=="
    }
  },
  {
    "tp-id": "23",
    "ietf-te-topology:te-tp-id": 23
  }
],
"ietf-optical-impairment-topology:transponders": {
  "transponder": [
    {
      "transponder-id": 1,
      "transceiver": [
        {
          "transceiver-id": 1,
          "outgoing-otsi": {
            "otsi-group-ref": "Red OTSiG (Forward)",
            "otsi-ref": 1
          },
          "incoming-otsi": {
            "otsi-group-ref": "Red OTSiG (Reverse)",
            "otsi-ref": 1
          }
        }
      ]
    }
  ]
},

```

```

    {
      "transponder-id": 2,
      "transceiver": [
        {
          "transceiver-id": 1,
          "outgoing-otsi": {
            "otsi-group-ref": "Green OTSiG (Forward)",
            "otsi-ref": 1
          },
          "incoming-otsi": {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "otsi-ref": 1
          }
        },
        {
          "transceiver-id": 2,
          "outgoing-otsi": {
            "otsi-group-ref": "Green OTSiG (Forward)",
            "otsi-ref": 2
          },
          "incoming-otsi": {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "otsi-ref": 2
          }
        }
      ]
    }
  ],
  "ietf-network-topology:link": [
    {
      "link-id": "Add-Drop-Link-1-Forward",
      "source": {
        "source-node": "WDM-TE-Node-1",
        "source-tp": "1"
      },
      "ietf-te-topology:te": {
        "te-link-attributes": {
          "ietf-optical-impairment-topology:oms-attributes": {
            "media-channel-groups": {
              "media-channel-group": [
                {
                  "otsi-group-ref": "Red OTSiG (Forward)",
                  "media-channel": [
                    {
                      "media-channel-id": 1,

```

```

        "otsi-ref": [
            {
                "carrier-ref": 1
            }
        ]
    }
}
}
}
}
}
}
},
{
    "link-id": "Add-Drop-Link-1-Reverse",
    "destination": {
        "dest-node": "WDM-TE-Node-1",
        "dest-tp": "1"
    },
    "ietf-te-topology:te": {
        "te-link-attributes": {
            "ietf-optical-impairment-topology:oms-attributes": {
                "media-channel-groups": {
                    "media-channel-group": [
                        {
                            "otsi-group-ref": "Red OTSiG (Reverse)",
                            "media-channel": [
                                {
                                    "media-channel-id": 2,
                                    "otsi-ref": [
                                        {
                                            "carrier-ref": 1
                                        }
                                    ]
                                }
                            ]
                        }
                    ]
                }
            }
        }
    },
    "link-id": "Add-Drop-Link-2-Forward",
    "source": {
        "source-node": "WDM-TE-Node-1",

```

```

    "source-tp": "2"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Green OTSiG (Forward)",
              "media-channel": [
                {
                  "media-channel-id": 2,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        }
      }
    }
  },
  {
    "link-id": "Add-Drop-Link-2-Reverse",
    "destination": {
      "dest-node": "WDM-TE-Node-1",
      "dest-tp": "2"
    },
    "ietf-te-topology:te": {
      "te-link-attributes": {
        "ietf-optical-impairment-topology:oms-attributes": {
          "media-channel-groups": {
            "media-channel-group": [
              {
                "otsi-group-ref": "Green OTSiG (Reverse)",
                "media-channel": [
                  {
                    "media-channel-id": 3,
                    "otsi-ref": [
                      {
                        "carrier-ref": 1
                      }
                    ]
                  }
                ]
              }
            ]
          }
        }
      }
    }
  }
}

```



```

    ]
  }
]
}
}
}
},
{
  "link-id": "Add-Drop-Link-3-Forward",
  "source": {
    "source-node": "WDM-TE-Node-1",
    "source-tp": "3"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Green OTSiG (Forward)",
              "media-channel": [
                {
                  "media-channel-id": 4,
                  "otsi-ref": [
                    {
                      "carrier-ref": 2
                    }
                  ]
                }
              ]
            }
          ]
        }
      }
    }
  },
  "link-id": "Add-Drop-Link-3-Reverse",
  "destination": {
    "dest-node": "WDM-TE-Node-1",
    "dest-tp": "3"
  },
  "ietf-te-topology:te": {
    "ietf-te-topology:te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {

```

```

        "media-channel-group": [
          {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "media-channel": [
              {
                "media-channel-id": 5,
                "otsi-ref": [
                  {
                    "carrier-ref": 2
                  }
                ]
              }
            ]
          }
        ]
      }
    }
  },
  {
    "link-id": "Add-Drop-Bundled-Link-Forward",
    "source": {
      "source-node": "WDM-TE-Node-1",
      "source-tp": "23"
    },
    "ietf-te-topology:te": {
      "bundled-links": {
        "bundled-link": [
          {
            "sequence": 1,
            "src-tp-ref": "2"
          },
          {
            "sequence": 2,
            "src-tp-ref": "3"
          }
        ]
      }
    }
  },
  {
    "link-id": "Add-Drop-Bundled-Link-Reverse",
    "destination": {
      "dest-node": "WDM-TE-Node-1",
      "dest-tp": "23"
    },
    "ietf-te-topology:te": {

```

```

        "bundled-links": {
          "bundled-link": [
            {
              "sequence": 1,
              "des-tp-ref": "2"
            },
            {
              "sequence": 2,
              "des-tp-ref": "3"
            }
          ]
        }
      ],
    },
    {
      "network-id": "WDM-Network-2",
      "network-types": {
        "ietf-te-topology:te-topology": {
          "ietf-optical-impairment-topology:optical-impairment-top\
ology": {}
        },
        "ietf-te-topology:te-topology-identifier": {
          "topology-id": "WDM-Network-2"
        },
        "ietf-te-topology:te": {},
        "ietf-optical-impairment-topology:otsis": {
          "otsi-group": [
            {
              "otsi-group-id": "Red OTSiG (Forward)",
              "otsi": [
                {
                  "carrier-id": 1
                }
              ]
            },
            {
              "otsi-group-id": "Red OTSiG (Reverse)",
              "otsi": [
                {
                  "carrier-id": 1
                }
              ]
            },
            {
              "otsi-group-id": "Green OTSiG (Forward)",

```

```

    "otsi": [
      {
        "carrier-id": 1
      },
      {
        "carrier-id": 2
      }
    ]
  },
  {
    "otsi-group-id": "Green OTSiG (Reverse)",
    "otsi": [
      {
        "carrier-id": 1
      },
      {
        "carrier-id": 2
      }
    ]
  }
],
},
"node": [
  {
    "node-id": "WDM-TE-Node-2",
    "ietf-te-topology:te-node-id": "192.0.2.2",
    "ietf-te-topology:te": {},
    "ietf-network-topology:termination-point": [
      {
        "tp-id": "1",
        "ietf-te-topology:te-tp-id": 1,
        "ietf-te-topology:te": {}
      },
      {
        "tp-id": "2",
        "ietf-te-topology:te-tp-id": 2,
        "ietf-te-topology:te": {}
      },
      {
        "tp-id": "3",
        "ietf-te-topology:te-tp-id": 3,
        "ietf-te-topology:te": {}
      },
      {
        "tp-id": "4",
        "ietf-te-topology:te-tp-id": 4,
        "ietf-te-topology:te": {
          "inter-domain-plug-id": "AQ=="
        }
      }
    ]
  }
]

```

```

    }
  },
  {
    "tp-id": "5",
    "ietf-te-topology:te-tp-id": 5,
    "ietf-te-topology:te": {
      "inter-domain-plug-id": "Ag=="
    }
  },
  {
    "tp-id": "6",
    "ietf-te-topology:te-tp-id": 6,
    "ietf-te-topology:te": {
      "inter-domain-plug-id": "Awo="
    }
  }
]
}
],
"ietf-network-topology:link": [
  {
    "link-id": "Add-Drop-Link-1-Forward",
    "destination": {
      "dest-node": "WDM-TE-Node-2",
      "dest-tp": "4"
    },
    "ietf-te-topology:te": {
      "te-link-attributes": {
        "ietf-optical-impairment-topology:oms-attributes": {
          "media-channel-groups": {
            "media-channel-group": [
              {
                "otsi-group-ref": "Red OTSiG (Forward)",
                "media-channel": [
                  {
                    "media-channel-id": -10,
                    "flexi-n": -10,
                    "otsi-ref": [
                      {
                        "carrier-ref": 1
                      }
                    ]
                  }
                ]
              }
            ]
          }
        }
      }
    }
  }
]
}

```

```

    }
  }
},
{
  "link-id": "Add-Drop-Link-1-Reverse",
  "source": {
    "source-node": "WDM-TE-Node-2",
    "source-tp": "4"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Red OTSiG (Reverse)",
              "media-channel": [
                {
                  "media-channel-id": 10,
                  "flexi-n": 10,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        },
        {
          "otsi-group-ref": "Green OTSiG (Reverse)",
          "media-channel": [
            {
              "media-channel-id": 20,
              "flexi-n": 20,
              "otsi-ref": [
                {
                  "carrier-ref": 1
                },
                {
                  "carrier-ref": 2
                }
              ]
            }
          ]
        }
      ]
    }
  }
}

```

```

    }
  }
},
{
  "link-id": "Add-Drop-Link-2-Forward",
  "destination": {
    "dest-node": "WDM-TE-Node-2",
    "dest-tp": "5"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Green OTSiG (Forward)",
              "media-channel": [
                {
                  "media-channel-id": -20,
                  "flexi-n": -20,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        }
      }
    }
  },
  "link-id": "Add-Drop-Link-2-Reverse",
  "source": {
    "source-node": "WDM-TE-Node-2",
    "source-tp": "5"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Red OTSiG (Reverse)",

```

```

        "media-channel": [
            {
                "media-channel-id": 10,
                "flexi-n": 10,
                "otsi-ref": [
                    {
                        "carrier-ref": 1
                    }
                ]
            }
        ],
        {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "media-channel": [
                {
                    "media-channel-id": 20,
                    "flexi-n": 20,
                    "otsi-ref": [
                        {
                            "carrier-ref": 1
                        },
                        {
                            "carrier-ref": 2
                        }
                    ]
                }
            ]
        }
    ]
}
},
{
    "link-id": "Add-Drop-Link-3-Forward",
    "destination": {
        "dest-node": "WDM-TE-Node-2",
        "dest-tp": "6"
    },
    "ietf-te-topology:te": {
        "te-link-attributes": {
            "ietf-optical-impairment-topology:oms-attributes": {
                "media-channel-groups": {
                    "media-channel-group": [
                        {
                            "otsi-group-ref": "Green OTSiG (Forward)",

```



```

        "media-channel": [
            {
                "media-channel-id": -20,
                "flexi-n": -20,
                "otsi-ref": [
                    {
                        "carrier-ref": 2
                    }
                ]
            }
        ]
    }
}
},
{
    "link-id": "Add-Drop-Link-3-Reverse",
    "source": {
        "source-node": "WDM-TE-Node-2",
        "source-tp": "6"
    },
    "ietf-te-topology:te": {
        "ietf-te-topology:te-link-attributes": {
            "ietf-optical-impairment-topology:oms-attributes": {
                "media-channel-groups": {
                    "media-channel-group": [
                        {
                            "otsi-group-ref": "Red OTSiG (Reverse)",
                            "media-channel": [
                                {
                                    "media-channel-id": 10,
                                    "flexi-n": 10,
                                    "otsi-ref": [
                                        {
                                            "carrier-ref": 1
                                        }
                                    ]
                                }
                            ]
                        }
                    ]
                }
            },
            {
                "otsi-group-ref": "Green OTSiG (Reverse)",
                "media-channel": [
                    {
                        "media-channel-id": 20,

```

```

        "flexi-n": 20,
        "otsi-ref": [
            {
                "carrier-ref": 1
            },
            {
                "carrier-ref": 2
            }
        ]
    }
}
],
{
    "network-id": "WDM-Network-Complete",
    "network-types": {
        "ietf-te-topology:te-topology": {
            "ietf-optical-impairment-topology:optical-impairment-top\
ology": {}
        },
        "ietf-te-topology:te-topology-identifier": {
            "topology-id": "WDM-Network-Complete"
        },
        "ietf-te-topology:te": {},
        "ietf-optical-impairment-topology:otsis": {
            "otsi-group": [
                {
                    "otsi-group-id": "Red OTSiG (Forward)",
                    "otsi": [
                        {
                            "carrier-id": 1
                        }
                    ]
                },
                {
                    "otsi-group-id": "Red OTSiG (Reverse)",
                    "otsi": [
                        {
                            "carrier-id": 1
                        }
                    ]
                }
            ]
        }
    }
},
{

```

```

    ]
  },
  {
    "otsi-group-id": "Green OTSiG (Forward)",
    "otsi": [
      {
        "carrier-id": 1
      },
      {
        "carrier-id": 2
      }
    ]
  },
  {
    "otsi-group-id": "Green OTSiG (Reverse)",
    "otsi": [
      {
        "carrier-id": 1
      },
      {
        "carrier-id": 2
      }
    ]
  }
]
},
"node": [
  {
    "node-id": "WDM-TE-Node-1",
    "ietf-te-topology:te-node-id": "192.0.2.1",
    "ietf-te-topology:te": {
      "ietf-te-topology:tunnel-termination-point": [
        {
          "tunnel-tp-id": "AQ==",
          "ietf-optical-impairment-topology:ttp-transceiver"
\: [
            {
              "transponder-ref": 1,
              "transceiver-ref": 1
            }
          ],
          "local-link-connectivities": {
            "is-allowed": false,
            "local-link-connectivity": [
              {
                "link-tp-ref": "1",
                "ietf-optical-impairment-topology:llc-transc
\eiver": [

```

```

        {
            "ttp-transponder-ref": 1,
            "ttp-transceiver-ref": 1,
            "is-allowed": true
        }
    ]
}
],
{
    "tunnel-tp-id": "Ag==",
    "ietf-optical-impairment-topology:ttp-transceiver"\
\:: [
    {
        "transponder-ref": 2,
        "transceiver-ref": 1
    },
    {
        "transponder-ref": 2,
        "transceiver-ref": 2
    }
],
"local-link-connectivities": {
    "is-allowed": false,
    "local-link-connectivity": [
        {
            "link-tp-ref": "2",
            "ietf-optical-impairment-topology:llc-transc\
\ceiver": [
                {
                    "ttp-transponder-ref": 2,
                    "ttp-transceiver-ref": 1,
                    "is-allowed": true
                }
            ]
        },
        {
            "link-tp-ref": "3",
            "ietf-optical-impairment-topology:llc-transc\
\ceiver": [
                {
                    "ttp-transponder-ref": 2,
                    "ttp-transceiver-ref": 2,
                    "is-allowed": true
                }
            ]
        }
    ]
}

```

```

    ]
  }
}
],
"ietf-network-topology:termination-point": [
  {
    "tp-id": "1",
    "ietf-te-topology:te-tp-id": 1,
    "ietf-te-topology:te": {}
  },
  {
    "tp-id": "2",
    "ietf-te-topology:te-tp-id": 2,
    "ietf-te-topology:te": {}
  },
  {
    "tp-id": "3",
    "ietf-te-topology:te-tp-id": 3,
    "ietf-te-topology:te": {}
  },
  {
    "tp-id": "23",
    "ietf-te-topology:te-tp-id": 23
  }
],
"ietf-optical-impairment-topology:transponders": {
  "transponder": [
    {
      "transponder-id": 1,
      "transceiver": [
        {
          "transceiver-id": 1,
          "outgoing-otsi": {
            "otsi-group-ref": "Red OTSiG (Forward)",
            "otsi-ref": 1
          },
          "incoming-otsi": {
            "otsi-group-ref": "Red OTSiG (Reverse)",
            "otsi-ref": 1
          }
        }
      ]
    },
    {
      "transponder-id": 2,
      "transceiver": [
        {

```

```

        "transceiver-id": 1,
        "outgoing-otsi": {
            "otsi-group-ref": "Green OTSiG (Forward)",
            "otsi-ref": 1
        },
        "incoming-otsi": {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "otsi-ref": 1
        }
    },
    {
        "transceiver-id": 2,
        "outgoing-otsi": {
            "otsi-group-ref": "Green OTSiG (Forward)",
            "otsi-ref": 2
        },
        "incoming-otsi": {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "otsi-ref": 2
        }
    }
]
}
}
},
{
    "node-id": "WDM-TE-Node-2",
    "ietf-te-topology:te-node-id": "192.0.2.2",
    "ietf-te-topology:te": {},
    "ietf-network-topology:termination-point": [
        {
            "tp-id": "1",
            "ietf-te-topology:te-tp-id": 1,
            "ietf-te-topology:te": {}
        },
        {
            "tp-id": "2",
            "ietf-te-topology:te-tp-id": 2,
            "ietf-te-topology:te": {}
        },
        {
            "tp-id": "3",
            "ietf-te-topology:te-tp-id": 3,
            "ietf-te-topology:te": {}
        },
        {
            "tp-id": "4",

```

```

        "ietf-te-topology:te-tp-id": 4,
        "ietf-te-topology:te": {}
    },
    {
        "tp-id": "5",
        "ietf-te-topology:te-tp-id": 5,
        "ietf-te-topology:te": {}
    },
    {
        "tp-id": "6",
        "ietf-te-topology:te-tp-id": 6,
        "ietf-te-topology:te": {}
    },
    {
        "tp-id": "56",
        "ietf-te-topology:te-tp-id": 56,
        "ietf-te-topology:te": {}
    }
]
},
"ietf-network-topology:link": [
{
    "link-id": "Add-Drop-Link-1-Forward",
    "source": {
        "source-node": "WDM-TE-Node-1",
        "source-tp": "1"
    },
    "destination": {
        "dest-node": "WDM-TE-Node-2",
        "dest-tp": "4"
    },
    "ietf-te-topology:te": {
        "te-link-attributes": {
            "ietf-optical-impairment-topology:oms-attributes": {
                "media-channel-groups": {
                    "media-channel-group": [
                        {
                            "otsi-group-ref": "Red OTSiG (Forward)",
                            "media-channel": [
                                {
                                    "media-channel-id": -10,
                                    "flexi-n": -10,
                                    "otsi-ref": [
                                        {
                                            "carrier-ref": 1
                                        }
                                    ]
                                }
                            ]
                        }
                    ]
                }
            }
        }
    }
}
]

```

```

    }
  ]
}
}
}
}
},
{
  "link-id": "Add-Drop-Link-1-Reverse",
  "source": {
    "source-node": "WDM-TE-Node-2",
    "source-tp": "4"
  },
  "destination": {
    "dest-node": "WDM-TE-Node-1",
    "dest-tp": "1"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Red OTSiG (Reverse)",
              \

              "media-channel": [
                {
                  "media-channel-id": 10,
                  "flexi-n": 10,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        },
        {
          "otsi-group-ref": "Green OTSiG (Reverse)",
          "media-channel": [
            {
              "media-channel-id": 20,
              "flexi-n": 20,
              "otsi-ref": [
                {
                  "carrier-ref": 1
                }
              ]
            }
          ]
        }
      ]
    }
  }
}

```



```

    },
    {
      "carrier-ref": 2
    }
  ]
}
]
}
]
}
}
}
},
{
  "link-id": "Add-Drop-Link-2-Forward",
  "source": {
    "source-node": "WDM-TE-Node-1",
    "source-tp": "2"
  },
  "destination": {
    "dest-node": "WDM-TE-Node-2",
    "dest-tp": "5"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Green OTSiG (Forward)",
              "media-channel": [
                {
                  "media-channel-id": -20,
                  "flexi-n": -20,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        }
      }
    }
  }
}

```

```

    },
    {
      "link-id": "Add-Drop-Link-2-Reverse",
      "source": {
        "source-node": "WDM-TE-Node-2",
        "source-tp": "5"
      },
      "destination": {
        "dest-node": "WDM-TE-Node-1",
        "dest-tp": "2"
      },
      "ietf-te-topology:te": {
        "te-link-attributes": {
          "ietf-optical-impairment-topology:oms-attributes": {
            "media-channel-groups": {
              "media-channel-group": [
                {
                  "otsi-group-ref": "Red OTSiG (Reverse)",
                  "media-channel": [
                    {
                      "media-channel-id": 10,
                      "flexi-n": 10,
                      "otsi-ref": [
                        {
                          "carrier-ref": 1
                        }
                      ]
                    }
                  ]
                }
              ]
            },
            {
              "otsi-group-ref": "Green OTSiG (Reverse)",
              "media-channel": [
                {
                  "media-channel-id": 20,
                  "flexi-n": 20,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    },
                    {
                      "carrier-ref": 2
                    }
                  ]
                }
              ]
            }
          ]
        }
      ]
    }
  ]

```

```

    }
  }
}
},
{
  "link-id": "Add-Drop-Link-3-Forward",
  "source": {
    "source-node": "WDM-TE-Node-2",
    "source-tp": "4"
  },
  "destination": {
    "dest-node": "WDM-TE-Node-2",
    "dest-tp": "6"
  },
  "ietf-te-topology:te": {
    "te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Green OTSiG (Forward)",
              "media-channel": [
                {
                  "media-channel-id": -20,
                  "flexi-n": -20,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ]
        }
      }
    }
  },
  "link-id": "Add-Drop-Link-3-Reverse",
  "source": {
    "source-node": "WDM-TE-Node-2",
    "source-tp": "6"
  },
  "destination": {
    "dest-node": "WDM-TE-Node-1",

```

```

    "dest-tp": "3"
  },
  "ietf-te-topology:te": {
    "ietf-te-topology:te-link-attributes": {
      "ietf-optical-impairment-topology:oms-attributes": {
        "media-channel-groups": {
          "media-channel-group": [
            {
              "otsi-group-ref": "Red OTSiG (Reverse)",
              "media-channel": [
                {
                  "media-channel-id": 10,
                  "flexi-n": 10,
                  "otsi-ref": [
                    {
                      "carrier-ref": 1
                    }
                  ]
                }
              ]
            }
          ],
          {
            "otsi-group-ref": "Green OTSiG (Reverse)",
            "media-channel": [
              {
                "media-channel-id": 20,
                "flexi-n": 20,
                "otsi-ref": [
                  {
                    "carrier-ref": 1
                  },
                  {
                    "carrier-ref": 2
                  }
                ]
              }
            ]
          }
        ]
      }
    }
  ]
}

```

}

Contributors

Thanks to all contributors.

Aihua Guo
Huawei Technologies
Email: aguo@futurewei.com

Jonas Martensson
Smartoptics
Email: jonas.martensson@smartoptics.com

Additional Authors

Young Lee
Samsung Electronics
Email: youngleetx@gmail.com

Haomian Zheng
Huawei Technologies
Email: zhenghaomian@huawei.com

Nicola Sambo
Scuola Superiore Sant'Anna
Email: nicosambo@gmail.com

Giovanni Martinelli
Cisco
Email: giomarti@cisco.com

Jean-Luc Auge
Orange
Email: jeanluc.auge@orange.com

Julien Meuric
Orange
Email: julien.meuric@orange.com

Victor Lopez
Nokia
Email: Victor.Lopez@nokia.com

Enrico Griseri
Nokia
Email: Enrico.Griseri@nokia.com

Gert Grammel
Juniper
Email: ggrammel@juniper.net

Roberto Manzotti
Cisco
Email: rmanzott@cisco.com

Authors' Addresses

Dieter Beller (editor)
Nokia
Email: Dieter.Beller@nokia.com

Esther Le Rouzic
Orange
Email: esther.lerouzic@orange.com

Sergio Belotti
Nokia
Email: Sergio.Belotti@nokia.com

G. Galimberti
Nokia
Email: ggalimbe56@gmail.com

Italo Busi
Huawei Technologies
Email: Italo.Busi@huawei.com