

Network Inventory YANG  
Internet-Draft  
Intended status: Standards Track  
Expires: 12 October 2025

B. Wu, Ed.  
Huawei  
M. Boucadair  
Orange  
C. Zhou  
China Mobile  
Q. Wu  
Huawei  
10 April 2025

A Network Data Model for Inventory Topology Mapping  
draft-ietf-ivy-network-inventory-topology-02

## Abstract

This document defines a YANG model to map the network inventory data with the topology model to form a base underlay network. The model facilitates the correlation between the layer (e.g., Layer 2 and Layer 3) topology information and the inventory data of the underlay network for better service provisioning, network maintenance operations, and other assessment scenarios.

## Discussion Venues

This note is to be removed before publishing as an RFC.

Discussion of this document takes place on the Network Inventory YANG Working Group mailing list ([inventory-yang@ietf.org](mailto:inventory-yang@ietf.org)), which is archived at <https://mailarchive.ietf.org/arch/browse/inventory-yang/>.

Source for this draft and an issue tracker can be found at <https://github.com/ietf-ivy-wg/network-inventory-topology>.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 12 October 2025.

## Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

|                                                                                  |    |
|----------------------------------------------------------------------------------|----|
| 1. Introduction . . . . .                                                        | 2  |
| 1.1. Editorial Note (To be removed by RFC Editor) . . . . .                      | 3  |
| 2. Conventions and Definitions . . . . .                                         | 3  |
| 3. Sample Use Cases of the Data Model . . . . .                                  | 4  |
| 3.1. Determine Available Resources of Service Attachment Points (SAPs) . . . . . | 4  |
| 3.2. "What-if" Scenarios . . . . .                                               | 4  |
| 4. Module Tree Structure . . . . .                                               | 5  |
| 5. Network Inventory Topology YANG Module . . . . .                              | 6  |
| 6. Security Considerations . . . . .                                             | 10 |
| 7. IANA Considerations . . . . .                                                 | 10 |
| 8. References . . . . .                                                          | 11 |
| 8.1. Normative References . . . . .                                              | 11 |
| 8.2. Informative References . . . . .                                            | 12 |
| Acknowledgments . . . . .                                                        | 13 |
| Contributors . . . . .                                                           | 13 |
| Authors' Addresses . . . . .                                                     | 13 |

## 1. Introduction

[I-D.ietf-ivy-network-inventory-yang] defines the base network inventory model to aggregate the inventory data of Network Elements (NEs). This data includes identification of these NEs and their hardware, firmware, and software components. Examples of inventory hardware components could be rack, shelf, slot, board, or physical port. Examples of inventory software components could be platform Operating System (OS), software-patches, bios, or boot-loader [I-D.ietf-ivy-network-inventory-software].

In order to ease navigation from/to inventory and network topologies, this document extends the network topology model [RFC8345] for network inventory mapping: "ietf-network-inventory-topology" (Section 5). This model provides a mechanism for the correlation with existing network and topology models, such as "A YANG Network Data Model for Service Attachment Points (SAPs)" [RFC9408], "A YANG Data Model for Layer 2 Network Topologies" [RFC8944], and "A YANG Data Model for Layer 3 Topologies" [RFC8346].

The network inventory topology mapping data model ("ietf-network-inventory-topology") also provides anchor points to mount specific device configuration and state information, e.g., Quality of Service (QoS) and Access Control List (ACL) policies, to support configuration verification of policies at the network level. Further sample uses are discussed in Section 3.

Similar to the base inventory model [I-D.ietf-ivy-network-inventory-yang], the network inventory topology does not make any assumption about involved network elements and their roles in topologies. As such, the mapping model can be applied independent of the network type (optical local loops, access network, core network, etc.) and application.

The YANG data model in this document conforms to the Network Management Datastore Architecture (NMDA) defined in [RFC8342].

#### 1.1. Editorial Note (To be removed by RFC Editor)

Note to the RFC Editor: This section is to be removed prior to publication.

This document contains placeholder values that need to be replaced with finalized values at the time of publication. This note summarizes all of the substitutions that are needed.

Please apply the following replacements:

- \* XXXX --> the assigned RFC number for this I-D
- \* AAAA --> the assigned RFC number for [I-D.ietf-ivy-network-inventory-yang]

## 2. Conventions and Definitions

The meanings of the symbols in the YANG tree diagrams are defined in [RFC8340].

This document uses terms defined in [I-D.ietf-ivy-network-inventory-yang].

### 3. Sample Use Cases of the Data Model

#### 3.1. Determine Available Resources of Service Attachment Points (SAPs)

The inventory topology model can be used as a base to correlate underlay information, such as physical port components. Figure 1 exemplifies this usage.

During service provisioning, to check available physical port resources, the SAPs information can be associated with the underlay inventory information and interface information associated with the inventory topology, e.g., "parent-termination-point" of SAP Model can be associated with the "port-component-ref" and "interface-name" of the inventory topology model, which can be used to check the availability and capacity of physical ports.

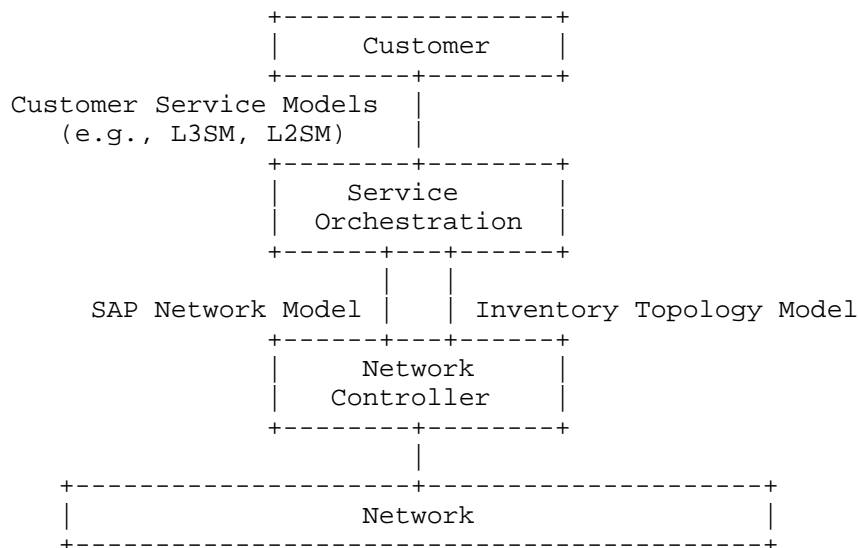


Figure 1: An Example Usage of Network Inventory Topology

#### 3.2. "What-if" Scenarios

[I-D.irtf-nmrg-network-digital-twin-arch] defines Network Digital Twin (NDT) as a virtual representation of the physical network. Such representation is meant to be used to analyze, diagnose, emulate, and then manage the physical network based on data, models, and interfaces.

The management system can use NDT to build multi-layer topology maps for networks and endpoints with relationship types and dependencies, and identify potential impacts on configuration management information from incidents, problems, and changes. More generally, the inventory topology model can be used as part of the SIMAP [I-D.ietf-nmop-simap-concept].

The inventory topology model can, for example, be used to emulate several "what-if" scenarios such as the impact of End of Life (EOL) or depletion of a hardware component (chipset) on the network resilience and service availability.

#### 4. Module Tree Structure

An overview of the structure of the "ietf-network-inventory-topology" module is shown in Figure 2.

```

module: ietf-network-inventory-topology
  augment /nw:networks/nw:network/nw:node:
    +--rw inventory-mapping-attributes
      {topology-to-inventory-navigate}?
    +--ro ne-ref?    nwi:ne-ref
  augment /nw:networks/nw:network/nt:link:
    +--rw inventory-mapping-attributes
      {topology-to-inventory-navigate}?
    +--ro cable-name?  string
    +--ro link-type?   string
  augment /nw:networks/nw:network/nw:node/nt:termination-point:
    +--rw inventory-mapping-attributes
      {topology-to-inventory-navigate}?
    +--rw ne-ref?      nwi:ne-ref
    +--rw port-ref?    leafref
    +--ro physical-interface-name? string
  augment /nwi:network-inventory/nwi:network-elements
    /nwi:network-element:
    +--rw node-ref?      leafref {inventory-to-topology-navigate}?
    +--rw network-ref?   -> /nw:networks/network/network-id
      {inventory-to-topology-navigate}?

```

Figure 2: The Structure of the Network Inventory Mapping Data Model

The module defines two features "inventory-to-topology-navigate" and "topology-to-inventory-navigate" to control the navigation direction (from topology to inventory and vice versa).

The module augments the "ietf-network-topology" module as follows:

- \* A new network topology type: "network-inventory-mapping". The corresponding container augments the "network-types" of the "ietf-network" module.
- \* Inventory mapping attributes for nodes, links, and termination points: The corresponding containers augments the topology module with the references to the base network inventory, references to interface management, and policy mount points

The inventory topology model associates inventory data with overlay topologies. It can be used as the "supporting-networks" of SAP, Layer 2, or Layer 3 topologies.

Also, the "ietf-network-inventory-topology" module augments the "ietf-network-inventory" to add required references to navigate from the inventory to topologies ('node-ref' and 'network-ref').

## 5. Network Inventory Topology YANG Module

This module augments the Network Topology [RFC8345].

This module imports the base network inventory [I-D.ietf-ivy-network-inventory-yang].

```
<CODE BEGINS> file "ietf-network-inventory-topology@2025-02-04.yang"
module ietf-network-inventory-topology {
  yang-version 1.1;
  namespace
    "urn:ietf:params:xml:ns:yang:ietf-network-inventory-topology";
  prefix nwit;

  import ietf-network {
    prefix nw;
    reference
      "RFC 8345: A YANG Data Model for Network Topologies,
       Section 4.1";
  }
  import ietf-network-topology {
    prefix nt;
    reference
      "RFC 8345: A YANG Data Model for Network Topologies,
       Section 4.2";
  }
  import ietf-network-inventory {
    prefix nwi;
    reference
      "RFC AAAA: A YANG Data Model for Network Inventory";
  }
}
```

```
organization
  "IETF Network Inventory YANG (ivy) Working Group";
contact
  "WG Web:    <https://datatracker.ietf.org/wg/ivy>
  WG List:    <mailto:inventory-yang@ietf.org>

  Editor: Bo Wu
           <lane.wubo@huawei.com>
  Editor: Mohamed Boucadair
           <mohamed.boucadair@orange.com>
  Author: Cheng Zhou
           <zhouchengyijy@chinamobile.com>
  Author: Qin Wu
           <bill.wu@huawei.com>";
description
  "This YANG module defines a YANG module for network
  topology and inventory mapping.

  Copyright (c) 2025 IETF Trust and the persons identified
  as authors of the code. All rights reserved.

  Redistribution and use in source and binary forms, with
  or without modification, is permitted pursuant to, and
  subject to the license terms contained in, the Revised
  BSD License set forth in Section 4.c of the IETF Trust's
  Legal Provisions Relating to IETF Documents
  (https://trustee.ietf.org/license-info).

  This version of this YANG module is part of RFC XXXX
  (https://www.rfc-editor.org/info/rfcXXXX); see the RFC
  itself for full legal notices.";

revision 2025-03-03 {
  description
    "Initial revision.";
  reference
    "RFC XXXX: A YANG Data Model for Network Inventory Mapping
    Topology";
}

/* features */

feature inventory-to-topology-navigate {
  description
    "Indicates support for navigating from inventory to topology.";
}

feature topology-to-inventory-navigate {
```

```
    description
      "Indicates support for navigating from topology to inventory.";
  }

/* Groupings */
/* Node Grouping Feature with 1:1 mapping to NE*/

grouping node-inventory-feature-attributes {
  description
    "Network Inventory mapping node scope attributes";
  container inventory-mapping-attributes {
    if-feature "topology-to-inventory-navigate";
    description
      "The container node attributes of Network Inventory
        mapping.";
    leaf ne-ref {
      type nwi:ne-ref;
      config false;
      description
        "1:1 mapping to the Network Element (NE) from which this
          node is abstracted.";
    }
  }
}

grouping tp-inventory-feature-attributes {
  description
    "Network Inventory mapping Termination Point (TP) scope
      attributes";
  container inventory-mapping-attributes {
    if-feature "topology-to-inventory-navigate";
    description
      "Specifies the TP attributes of Network Inventory mapping.";
    /* 1:1 mapping to physical port component */
    uses nwi:port-ref;
    leaf physical-interface-name {
      type string;
      config false;
      description
        "1:1 mapping to physical interface name (e.g., eth0/1)";
    }
  }
}

grouping link-inventory-feature-attributes {
  description
    "Network Inventory mapping link scope attributes.";
  container inventory-mapping-attributes {
```



```
    if-feature "topology-to-inventory-navigate";
    description
        "Specifies the link attributes of network inventory
        mapping.";
    leaf cable-name {
        type string;
        config false;
        description
            "Reports the reference of the cable inventory from which
            this link is abstracted.";
    }
    leaf link-type {
        type string;
        config false;
        description
            "Reports the type of the link.";
    }
}
}

/* Main blocks */

augment "/nw:networks/nw:network/nw:node" {
    description
        "Groups parameters for inventory at the node level.";
    uses node-inventory-feature-attributes;
}

augment "/nw:networks/nw:network/nt:link" {
    description
        "Augments inventory topology link information.";
    uses link-inventory-feature-attributes;
}

augment "/nw:networks/nw:network/nw:node/nt:termination-point" {
    description
        "Augments inventory termination point information.";
    uses tp-inventory-feature-attributes;
}

/* Augment the network-inventory to add
   topology navigate */

augment "/nwi:network-inventory/nwi:network-elements"
    + "/nwi:network-element" {
    if-feature "inventory-to-topology-navigate";
    description
        "Augments the network element with 1:1 mapping with the network
```

```
        the element is part of.";
    uses nw:node-ref;
  }
}
<CODE ENDS>
```

## 6. Security Considerations

This section is modeled after the template described in Section 3.7 of [I-D.ietf-netmod-rfc8407bis].

The "ietf-network-inventory-topology" YANG module defines a data model that is designed to be accessed via YANG-based management protocols, such as NETCONF [RFC6241] and RESTCONF [RFC8040]. These protocols have to use a secure transport layer (e.g., SSH [RFC4252], TLS [RFC8446], and QUIC [RFC9000]) and have to use mutual authentication.

The Network Configuration Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., "config true", which is the default). All writable data nodes are likely to be reasonably sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) and delete operations to these data nodes without proper protection or authentication can have a negative effect on network operations. The following subtrees and data nodes have particular sensitivities/vulnerabilities:

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. Specifically, the following subtrees and data nodes have particular sensitivities/vulnerabilities:

'ne-ref': The reference may be used to track the set of network elements.

## 7. IANA Considerations

IANA is requested to register the following URI in the "ns" subregistry within the "IETF XML Registry" [RFC3688]:

URI: urn:ietf:params:xml:ns:yang:ietf-network-inventory-topology  
Registrant Contact: The IESG.  
XML: N/A; the requested URI is an XML namespace.

IANA is requested to register the following YANG module in the "YANG Module Names" registry [RFC6020] within the "YANG Parameters" registry group:

Name: ietf-network-inventory-topology  
Namespace: urn:ietf:params:xml:ns:yang:ietf-network-inventory-topology  
Prefix: nwit  
Maintained by IANA? N  
Reference: RFC XXXX

## 8. References

### 8.1. Normative References

- [I-D.ietf-ivy-network-inventory-yang]  
Yu, C., Belotti, S., Bouquier, J., Peruzzini, F., and P. Bedard, "A Base YANG Data Model for Network Inventory", Work in Progress, Internet-Draft, draft-ietf-ivy-network-inventory-yang-05, 28 February 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-ivy-network-inventory-yang-05>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/rfc/rfc3688>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/rfc/rfc6020>>.
- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, RFC 8341, DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/rfc/rfc8341>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", RFC 8342, DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/rfc/rfc8342>>.

- [RFC8345] Clemm, A., Medved, J., Varga, R., Bahadur, N., Ananthakrishnan, H., and X. Liu, "A YANG Data Model for Network Topologies", RFC 8345, DOI 10.17487/RFC8345, March 2018, <<https://www.rfc-editor.org/rfc/rfc8345>>.
- [RFC9408] Boucadair, M., Ed., Gonzalez de Dios, O., Barguil, S., Wu, Q., and V. Lopez, "A YANG Network Data Model for Service Attachment Points (SAPs)", RFC 9408, DOI 10.17487/RFC9408, June 2023, <<https://www.rfc-editor.org/rfc/rfc9408>>.

## 8.2. Informative References

- [I-D.ietf-ivy-network-inventory-software]  
Wu, B., Zhou, C., Wu, Q., and M. Boucadair, "A YANG Network Data Model of Network Inventory Software Extensions", Work in Progress, Internet-Draft, draft-ietf-ivy-network-inventory-software-00, 9 December 2024, <<https://datatracker.ietf.org/doc/html/draft-ietf-ivy-network-inventory-software-00>>.
- [I-D.ietf-netmod-rfc8407bis]  
Bierman, A., Boucadair, M., and Q. Wu, "Guidelines for Authors and Reviewers of Documents Containing YANG Data Models", Work in Progress, Internet-Draft, draft-ietf-netmod-rfc8407bis-22, 14 January 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-netmod-rfc8407bis-22>>.
- [I-D.ietf-nmop-simap-concept]  
Havel, O., Claise, B., de Dios, O. G., and T. Graf, "SIMAP: Concept, Requirements, and Use Cases", Work in Progress, Internet-Draft, draft-ietf-nmop-simap-concept-03, 3 March 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-nmop-simap-concept-03>>.
- [I-D.irtf-nmrg-network-digital-twin-arch]  
Zhou, C., Yang, H., Duan, X., Lopez, D., Pastor, A., Wu, Q., Boucadair, M., and C. Jacquenet, "Network Digital Twin: Concepts and Reference Architecture", Work in Progress, Internet-Draft, draft-irtf-nmrg-network-digital-twin-arch-10, 28 February 2025, <<https://datatracker.ietf.org/doc/html/draft-irtf-nmrg-network-digital-twin-arch-10>>.
- [RFC4252] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Authentication Protocol", RFC 4252, DOI 10.17487/RFC4252, January 2006, <<https://www.rfc-editor.org/rfc/rfc4252>>.

- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/rfc/rfc6241>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/rfc/rfc8040>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/rfc/rfc8340>>.
- [RFC8346] Clemm, A., Medved, J., Varga, R., Liu, X., Ananthakrishnan, H., and N. Bahadur, "A YANG Data Model for Layer 3 Topologies", RFC 8346, DOI 10.17487/RFC8346, March 2018, <<https://www.rfc-editor.org/rfc/rfc8346>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/rfc/rfc8446>>.
- [RFC8944] Dong, J., Wei, X., Wu, Q., Boucadair, M., and A. Liu, "A YANG Data Model for Layer 2 Network Topologies", RFC 8944, DOI 10.17487/RFC8944, November 2020, <<https://www.rfc-editor.org/rfc/rfc8944>>.

#### Acknowledgments

The authors wish to thank Italo Busi, Olga Havel, Aihua Guo, Oscar Gonzalez de Dios, and many others for their helpful comments and suggestions.

#### Contributors

Chaode Yu  
Huawei  
Email: [yuchaode@huawei.com](mailto:yuchaode@huawei.com)

#### Authors' Addresses

Bo Wu (editor)  
Huawei  
Email: [lane.wubo@huawei.com](mailto:lane.wubo@huawei.com)

Mohamed Boucadair  
Orange  
Email: mohamed.boucadair@orange.com

Cheng Zhou  
China Mobile  
Email: zhouchengyjy@chinamobile.com

Qin Wu  
Huawei  
Email: bill.wu@huawei.com