

LSR Working Group  
Internet Draft  
Intended status: Standards Track  
Expires: September 15, 2026

L. Gong  
China Mobile  
C. Lin  
M. Chen  
New H3C Technologies  
L. Ginsberg  
P. Psenak  
Cisco Systems  
March 15, 2026

Advertisement of Remote Interface Identifiers for Layer 2 Bundle  
Members  
draft-ietf-lsr-l2-bundle-member-remote-id-02

Abstract

In networks where Layer 2 (L2) interface bundles (such as a Link Aggregation Group (LAG) [IEEE802.1AX]) are deployed, a controller may need to collect the connectivity relationships between bundle members for traffic engineering (TE) purposes. For example, when performing topology management and bidirectional path computation for TE, it is essential to know the connectivity relationships among bundle members.

This document describes how OSPF and IS-IS would advertise the remote interface identifiers for Layer 2 bundle members. The corresponding extension of BGP-LS is also specified.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 15 September 2026.

## Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction.....	2
1.1. Requirements Language.....	3
2. Use Case.....	3
3. Advertising L2 Bundle Member Remote Interface Identifier.....	4
4. OSPF Extension.....	5
5. IS-IS Extension.....	5
6. BGP-LS Extension.....	6
7. Acquirement of Remote Interface Identifier.....	7
8. Security Considerations.....	7
9. IANA Considerations.....	8
10. References.....	8
10.1. Normative References.....	8
10.2. Informational References.....	10
Contributors.....	10
Authors' Addresses.....	10

## 1. Introduction

BGP-LS [RFC9552] is widely used for collecting topology information from IGP. In networks where Layer 2 (L2) interface bundles (such as a Link Aggregation Group (LAG) [IEEE802.1AX]) are deployed, a controller may need to collect the connectivity relationships between bundle members for traffic engineering (TE) purposes. For example, when performing topology management and bidirectional path computation for TE, it is essential to know the connectivity relationships among bundle members.

When advertising L2 bundles in OSPF [RFC9356] and IS-IS [RFC8668], a member link is described by its local interface identifier, also referred to as a link local identifier. If the remote interface

identifier could be advertised for each member link, the pairing relationships between the local and remote interfaces would be clear.

This document describes the mechanism for advertising the remote interface identifier for Layer 2 bundle members in OSPF and IS-IS. The BGP-LS extension for advertising L2 bundle member interface remote identifier is also specified in this document.

### 1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

## 2. Use Case

Figure 1 shows a network, in which an L2 bundle is deployed between R1 and R2. The controller collects the topology information from R3 via BGP-LS.

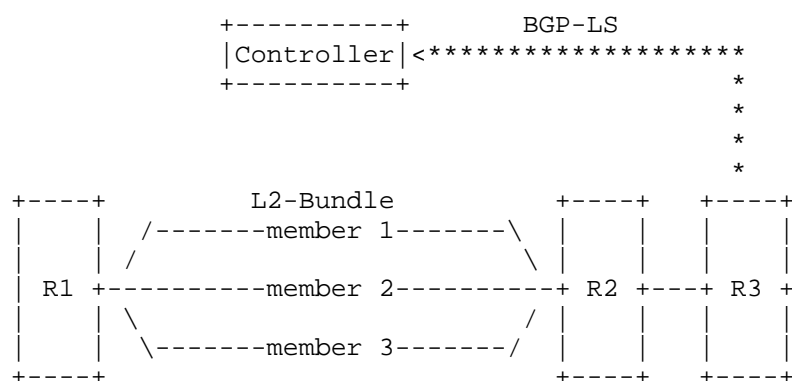


Figure 1

The network operator may want to control bidirectional traffic flows on the individual member links of the underlying Layer 2 bundle for TE purposes. The real-time bandwidth, delay, and link loss might be measured for each bundle member at both ends. Labels or SIDs might be allocated for each bundle member at both ends. So, there would be requirements for the controller to figure out the connectivity relationships between bundle members.

This document defines a mechanism for IGP routers to advertise the remote interface identifiers for each L2 bundle member, along with the corresponding mechanism for the controller to collect such information via BGP-LS.

### 3. Advertising L2 Bundle Member Remote Interface Identifier

In OSPF, the remote interface identifiers of L2 bundle members are advertised as follows.

OSPFv2 Extended Link TLV, or OSPFv3 Router-Link TLV, for L3 Link:

- L2 Bundle Member Attributes TLV:

- L2 Bundle Member Descriptor of Member #1

- L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 4)

- L2 Bundle Member Attributes TLV:

- L2 Bundle Member Descriptor of Member #2

- L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 4)

- ...

- L2 Bundle Member Attributes TLV:

- L2 Bundle Member Descriptor of Member #n

- L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 4)

In IS-IS, the remote interface identifiers of L2 bundle members are advertised as follows. Note that IS-IS can advertise a set of members in a single L2 Bundle Member Attribute Descriptor, so the L2 Bundle Member Interface Remote Identifier Sub-TLV MUST carry multiple remote interface identifiers, one for each of the bundle members advertised in the associated L2 Bundle Member Descriptor.

L2 Bundle Member Attributes TLV:

- Parent L3 Neighbor Descriptor

- Length of L2 Bundle Attribute Descriptor

- Number of L2 Bundle Member Descriptors

- L2 Bundle Member Link Local Identifiers of Member #1,#2,...,#n

- Sub-TLV(s)

- L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 5) for Member #1,#2,...,#n

In BGP-LS, the remote interface identifiers of L2 bundle members are advertised as follows.

BGP-LS Link NLRI: Peer Adj Link for R1->R2(as described in Section 5.2 of [RFC9086])

Link Attributes:

L2 Bundle Member Attributes TLV:

L2 Bundle Member Descriptor of Member #1

L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 6)

L2 Bundle Member Attributes TLV:

L2 Bundle Member Descriptor of Member #2

L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 6)

...

L2 Bundle Member Attributes TLV:

L2 Bundle Member Descriptor of Member #n

L2 Bundle Member Interface Remote Identifier Sub-TLV (Optional - as defined in Section 6)

#### 4. OSPF Extension

This document defines a new L2 Bundle Member Interface Remote Identifier Sub-TLV in both OSPFv2 and OSPFv3. This Sub-TLV is used to advertise the remote interface identifier for a L2 bundle member.

It can be carried as a sub-TLV of the OSPF L2 Bundle Member Attributes TLV [RFC9356]. It has the following format:

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
Type (TBA)										Length (4)																													
Remote Interface ID																																							

o Type: TBA.

o Length: 4.

o Remote Interface ID: Remote identifier of interface, 4 octets.

A remote interface ID with value of zero is not valid and MUST be ignored and handled as if the sub-TLV was not present.

#### 5. IS-IS Extension

This document defines a new L2 Bundle Member Interface Remote Identifier Sub-TLV in IS-IS. This Sub-TLV is used to advertise the remote interface identifiers for L2 bundle members.

It can be carried as a sub-TLV of the IS-IS L2 Bundle Member Attributes TLV [RFC8668]. It has the following format:

```

0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
|  Type (TBA)  |      Length      |
+-----+-----+-----+-----+
|                                     |
|      Remote Interface ID 1         |
+-----+-----+-----+-----+
~                                     ~
+-----+-----+-----+-----+
|                                     |
|      Remote Interface ID N         |
+-----+-----+-----+-----+

```

- o Type: TBA.
- o Length: 4 \* Number of L2 Bundle Member Descriptors.
- o Remote Interface ID: Remote identifier of interface, 4 octets.

There MUST be one Remote Interface ID for each of the L2 Bundle Members advertised under the associated L2 Bundle Member Attribute Descriptor. A remote interface ID with value of zero MUST be ignored and handled as if the value was unknown.

MP-TLV [RFC9885] for the new IS-IS sub-TLV SHOULD be set to "N".

## 6. BGP-LS Extension

This document defines a new L2 Bundle Member Interface Remote Identifier Sub-TLV in BGP-LS. This Sub-TLV is derived from the Remote Interface Identifier Sub-TLV of OSPF (Section 3) and IS-IS (Section 4).

It can be carried as a sub-TLV of the BGP-LS L2 Bundle Member Attributes TLV [RFC9085]. It has the following format:

```

0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
|  Type (TBA)  |      Length (4)   |
+-----+-----+-----+-----+
|                                     |
|      Remote Interface ID         |
+-----+-----+-----+-----+

```

- o Type: TBA.

- o Length: 4.
- o Remote Interface ID: Remote identifier of interface, 4 octets.

A remote interface ID with value of zero is not valid and MUST be ignored and handled as if the sub-TLV was not present.

## 7. Acquisition of Remote Interface Identifier

IGPs have no direct way to exchange L2 bundle member link identifiers since the Layer 3 protocol is not operating directly on the bundle members. Some L2 protocols may be used to get the remote interface identifiers for bundle members. This may be discovered via [IEEE802.1AX] when used to form the LAG bundle. A router may also run LLDP [802.1AB] on the bundle members to exchange local interface identifiers with its neighbor, by using the Port ID TLV.

How the remote interface identifier is obtained is out of the scope of this document.

## 8. Security Considerations

This document describes how OSPF, IS-IS and BGP-LS would advertise the remote interface identifiers for Layer 2 bundle members. There are no new security issues introduced by the extensions in this document. The security considerations of [RFC8668], [RFC9356], [RFC9552], [RFC9085] and [RFC9086] are applicable to this document.

As always, if the IS-IS protocol is used in an environment where unauthorized access to the physical links on which IS-IS Protocol Data Units (PDUs) are sent occurs, then attacks are possible. The use of authentication as defined in [RFC5304] and [RFC5310] is recommended to prevent such attacks.

As always, if the OSPF protocol is used in an environment where unauthorized access to the physical links on which OSPF packets are sent occurs, then attacks are possible. The use of authentication as defined in [RFC5709], [RFC7474], [RFC4552], and [RFC7166] is recommended for preventing such attacks.

The isolation of BGP-LS peering sessions is recommended to ensure that BGP-LS topology information (including the newly added remote interface identifiers information) is not advertised to an external BGP peering session outside the trusted domain [RFC8402].

## 9. IANA Considerations

This document adds the following new sub-TLV to the "OSPFv2 Extended Link TLV Sub-TLVs" registry.

Type	Designation	L2BM
TBA	L2 Bundle Member Interface Remote Identifier	Y

This document adds the following new sub-TLV to the "OSPFv3 Extended-LSA Sub-TLVs" registry.

Type	Description	L2BM
TBA	L2 Bundle Member Interface Remote Identifier	Y

This document adds the following new sub-TLV to the "IS-IS Sub-TLVs for TLVs Advertising Neighbor Information" registry.

Type	Description	22	23	25	141	222	223	MP
TBA	L2 Bundle Member Interface Remote Identifier	n	n	y	n	n	n	n

This document adds the following new sub-TLV to the "BGP-LS NLRI and Attribute TLVs" registry.

Type	Description
TBA	L2 Bundle Member Interface Remote Identifier

## 10. References

### 10.1. Normative References

[IEEE802.1AX]

IEEE, "IEEE Standard for Local and Metropolitan Area Networks--Link Aggregation", IEEE Std 802.1AX, DOI 10.1109/IEEESTD.2020.9105034, May 2020, <<https://doi.org/10.1109/IEEESTD.2020.9105034>>.



- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [RFC4552] Gupta, M. and N. Melam, "Authentication/Confidentiality for OSPFv3", RFC 4552, DOI 10.17487/RFC4552, June 2006, <<https://www.rfc-editor.org/info/rfc4552>>.
- [RFC5304] Li, T. and R. Atkinson, "IS-IS Cryptographic Authentication", RFC 5304, DOI 10.17487/RFC5304, October 2008, <<https://www.rfc-editor.org/info/rfc5304>>.
- [RFC5310] Bhatia, M., Manral, V., Li, T., Atkinson, R., White, R., and M. Fanto, "IS-IS Generic Cryptographic Authentication", RFC 5310, DOI 10.17487/RFC5310, February 2009, <<https://www.rfc-editor.org/info/rfc5310>>.
- [RFC5709] Bhatia, M., Manral, V., Fanto, M., White, R., Barnes, M., Li, T., and R. Atkinson, "OSPFv2 HMAC-SHA Cryptographic Authentication", RFC 5709, DOI 10.17487/RFC5709, October 2009, <<https://www.rfc-editor.org/info/rfc5709>>.
- [RFC7166] Bhatia, M., Manral, V., and A. Lindem, "Supporting Authentication Trailer for OSPFv3", RFC 7166, DOI 10.17487/RFC7166, March 2014, <<https://www.rfc-editor.org/info/rfc7166>>.
- [RFC7474] Bhatia, M., Hartman, S., Zhang, D., and A. Lindem, Ed., "Security Extension for OSPFv2 When Using Manual Key Management", RFC 7474, DOI 10.17487/RFC7474, April 2015, <<https://www.rfc-editor.org/info/rfc7474>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, May 2017.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8668] Ginsberg, L., Ed., Bashandy, A., Filsfils, C., Nanduri, M., and E. Aries, "Advertising Layer 2 Bundle Member Link Attributes in IS-IS", RFC 8668, DOI 10.17487/RFC8668, December 2019, <<https://www.rfc-editor.org/info/rfc8668>>.

- [RFC9085] Previdi, S., Talaulikar, K., Ed., Filsfils, C., Gredler, H., and M. Chen, "Border Gateway Protocol - Link State (BGP-LS) Extensions for Segment Routing", RFC 9085, DOI 10.17487/RFC9085, August 2021, <<https://www.rfc-editor.org/info/rfc9085>>.
- [RFC9086] Previdi, S., Talaulikar, K., Ed., Filsfils, C., Patel, K., Ray, S., and J. Dong, "Border Gateway Protocol - Link State (BGP-LS) Extensions for Segment Routing BGP Egress Peer Engineering", RFC 9086, DOI 10.17487/RFC9086, August 2021, <<https://www.rfc-editor.org/info/rfc9086>>.
- [RFC9356] Talaulikar, K. and P. Psenak, "Advertising L2 Bundle Member Link Attributes in OSPF", RFC 9356, January 2023, <<https://www.rfc-editor.org/info/rfc9356>>.
- [RFC9885] P. Kaneriy, T. Li, A. Przygienda, S. Hegde and L. GinsbergK., "Multi-Part TLVs in IS-IS", RFC 9885, October 2025, <<https://www.rfc-editor.org/info/rfc9885>>.

## 10.2. Informational References

- [802.1AB] "IEEE Standard for Local and metropolitan area networks- Station and Media Access Control Connectivity Discovery", IEEE Std 802.1AB-2016, 29 January 2016.
- [RFC9552] Talaulikar, K., Ed., "Distribution of Link-State and Traffic Engineering Information Using BGP", RFC 9552, DOI 10.17487/RFC9552, December 2023, <<https://www.rfc-editor.org/info/rfc9552>>.

## Contributors

Ketan Talaulikar  
Cisco Systems  
India  
Email: [ketant.ietf@gmail.com](mailto:ketant.ietf@gmail.com)

## Authors' Addresses

Liyan Gong  
China Mobile  
China  
Email: [gongliyan@chinamobile.com](mailto:gongliyan@chinamobile.com)

Changwang Lin  
New H3C Technologies  
China  
Email: linchangwang.04414@h3c.com

Mengxiao Chen  
New H3C Technologies  
China  
Email: chen.mengxiao@h3c.com

Les Ginsberg  
Cisco Systems  
United States of America  
Email: ginsberg@cisco.com

Peter Psenak  
Cisco Systems  
Apollo Business Center  
Mlynske nivy 43  
Bratislava 821 09  
Slovakia  
Email: ppsenak@cisco.com

