

LSR Working Group
Internet-Draft
Updates: 5443, 6987, 8770 (if approved)
Intended status: Standards Track
Expires: 3 September 2026

L. Gong
W. Cheng
China Mobile
C. Lin
New H3C Technologies
A. Lindem
Arrcus, Inc.
R. Chen
ZTE Corporation
2 March 2026

Advertising Unreachable Links in OSPF
draft-ietf-lsr-ospf-ls-link-infinity-23

Abstract

OSPF Router Link State Advertisements (LSAs) use fixed-format encodings that always include advertised links in the default SPF (Shortest Path First) computation. For non-default SPF computations, e.g., flexible algorithms as described in RFC 9350, advertised OSPF links are used in the default SPF computation even if this is not intended. In order to advertise these links and not use them in the base SPF calculation, the metric `LSLinkInfinity` (0xffff) is used to specify that the link is unreachable.

`MaxReachableLinkMetric` (0xfffe) is defined to provide backward compatible reachability in specifications that previously specified advertisement of `MaxLinkMetric` (0xffff). This document updates RFC 5443, RFC 6987, and RFC 8770 with respect to the advertisement of `MaxReachableLinkMetric` (0xfffe) rather than `MaxLinkMetric` (0xffff).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 3 September 2026.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	3
1.1. Requirements Language	3
2. Use Cases	3
2.1. Case 1: Traffic Engineering	3
2.2. Case 2: Flexible Algorithm	4
3. LSLinkInfinity Based Solution	5
3.1. Unreachable Link Advertisement	5
3.2. Unreachable Link Backward Compatibility	5
3.3. Stub Router Advertisement Backward Compatibility	6
3.4. Label Distribution Protocol (LDP) IGP Synchronization Backward Compatibility	7
4. Operational Considerations	7
4.1. Configuration Parameters	7
4.2. YANG Data Model	8
4.2.1. Tree for OSPF Functional Capability	8
4.2.2. Tree for OSPF Advertising Unreachable Links	9
4.2.3. IANA Module for OSPF Functional Capability Bits	10
4.2.4. YANG Module for OSPF Functional Capability	12
4.2.5. YANG Module for OSPF Advertising Unreachable Links	17
5. Security Considerations	19
6. IANA Considerations	19
6.1. Registering OSPF Router Functional Capability Bits	20
6.2. Registering YANG Modules	20
6.3. IANA Module for OSPF Functional Capability Bits	21
7. Contributors	22
8. Acknowledgments	22
9. References	22
9.1. Normative References	22
9.2. Informative References	24
Authors' Addresses	25

1. Introduction

OSPF Router Link State Advertisements (LSAs) use fixed-format encodings that always include advertised links in the default SPF (Shortest Path First) computation. For example, a link may be required for Traffic Engineering (TE) paths but not intended for hop-by-hop routing. Another example is an OSPF link used exclusively by a Flexible Algorithm [RFC9350] but excluded from the default algorithm.

In order to advertise these links as unreachable, the metric `LSLinkInfinity` (0xffff) is used to specify that the link is unreachable and OSPF routers supporting this specification will exclude the link from SPF calculations (subject to backward-compatibility constraints, refer to Section 3.2).

Stub Router Advertisement [RFC6987] defines `MaxLinkMetric` (0xffff) to indicate a router-LSA link should not be used for transit IP traffic. When an OSPF router supports the Unreachable Link capability defined in this document, OSPF Stub Router links are advertised as `MaxReachableLinkMetric` (0xfffe) rather than `MaxLinkMetric` (0xffff). This document updates [RFC6987] and [RFC8770] with respect to the advertisement of `MaxReachableLinkMetric` rather than `MaxLinkMetric`.

Similarly, Label Distribution Protocol (LDP) IGP Synchronization [RFC5443] specifies OSPF advertisement of `MaxLinkMetric` (0xffff) to indicate that while the OSPF adjacency is in FULL state, LDP has not been synchronized between the two neighbors and transit traffic is discouraged. This document updates [RFC5443] with respect to the advertisement of `MaxReachableLinkMetric` rather than `MaxLinkMetric`.

1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

2. Use Cases

2.1. Case 1: Traffic Engineering

A network topology is shown in Figure 1. The OSPF link between Node A and E is only to be used for traffic engineering. Since the OSPF link is advertised by default, it will be included in the base SPF calculation for the default topology and may be used for hop-by-hop routing in the default topology.




Figure 1: Network Topology

2.2. Case 2: Flexible Algorithm

A network topology is shown in Figure 2. The links between nodes A and B and between C and D are to be used exclusively for a flex-algorithm [RFC9350] devoted to specific traffic. These links have an Extended Administrative Group (EAG) [RFC7308] attribute specifying the "Red" color.

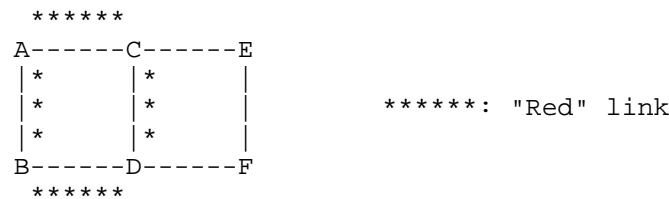


Figure 2: Network Topology

Flex-Algorithm 128 is enabled on Nodes A, B, C, and D, with an EAG rule including "Red" and the Metric-Type is designated to be a type other than the OSPF metric. OSPF will compute routes for Flex-Algorithm 128 using these links. The topology associated with Flex-Algorithm 128 is shown in Figure 3.



Figure 3: Topology of Flex-Algorithm 128

The "Red" links that are used by Flex-Algorithm 128 calculation. However, these "Red" links are also included in the default algorithm calculation [RFC9350] since they are reachable. Note that links used by the default algorithm are omitted from Figure 3 for clarity.

If the OSPF metrics for all the "Red" links are advertised as unreachable, they will be excluded from the default SPF calculation as shown in Figure 4, This allows the "Red" links from A to B and C to D to be used exclusively by the Flex-Algorithm 128 calculation.




Figure 4: Base SPF Topology Excluding Unreachable Links

3. LSLinkInfinity Based Solution

3.1. Unreachable Link Advertisement

This document specifies that if the OSPF metric of a link is advertised as LSLinkInfinity (0xffff), it MUST NOT be considered during the associated SPF computation. This applies to both the Flex-Algorithm SPF [RFC9350] and the base SPF as long as LSLinkInfinity is specified for the OSPF metric.

While the interpretation of LSLinkInfinity is only required in the base topology as other topologies are optional [RFC4915], OSPF routers supporting this specification MUST consistently interpret LSLinkInfinity as unreachable during the associated SPF computation. This applies to both the Flex-Algorithm SPF [RFC9350] and the base SPF as long as LSLinkInfinity is specified for the OSPF metric.

An OSPF metric with LSLinkInfinity indicating a link is unreachable is applicable to the following TLVs/LSAs:

- * The Router-LSA [RFC2328] [RFC5340]
- * The OSPFv2 Extended Link TLV of OSPFv2 Extended Link Opaque LSA [RFC7684]
- * The Router-Link TLV of OSPFv3 E-Router-LSA [RFC8362]

3.2. Unreachable Link Backward Compatibility

Prior to this specification, OSPF treated links with an advertised metric of LSLinkInfinity as reachable [RFC2328]. Hence, partial deployment of this specification may result in routing loops due to inconsistent interpretation of LSLinkInfinity. For example, in the network shown in Figure 5, link D-F is advertised with LSLinkInfinity (65535/0xffff). Router B supports LSLinkInfinity as unreachable, but

router A doesn't. Router A considers link D-F as reachable, and the shortest path to F is A->B->D->F. Router B considers link D-F as unreachable, and the shortest path to F is B->A->C->E->F. As a result, A forwards the packets to B, but B returns them to A, which results in a routing loop.

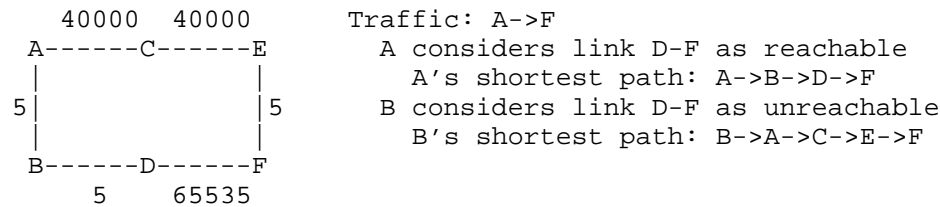


Figure 5: Inconsistent LSLinkInfinity Interpretation Causing Loops

To provide backward compatibility, this document defines that routers supporting LSLinkInfinity for unreachable links MUST advertise a Router Information (RI) LSA with a Router Functional Capabilities TLV [RFC7770] including the following Router Functional Capability Bit:

Bit	Capabilities
TBD	Unreachable Link support

Table 1

OSPF Routers MUST NOT treat links with an advertised metric of LSLinkInfinity as unreachable unless all routers in the OSPF area, i.e., all routers with Router-LSAs in the area Link State Database (LSDB), have advertised this capability. If all OSPF Routers in the area have advertised this capability, then links with an advertised metric of LSLinkInfinity MUST be treated as unreachable. Upon detection of a change in the number of routers in the area not supporting the Unreachable Link capability changes to 0 or from 0 to greater than 0, all OSPF routers in the area MUST recalculate their routes.

3.3. Stub Router Advertisement Backward Compatibility

Stub Router Advertisement [RFC6987] defines MaxLinkMetric (0xffff) to indicate a router-LSA link should not be used for transit traffic.

When an OSPF router supports the Unreachable Link capability defined in this document, the OSPF stub router MaxLinkMetric (0xffff) MUST be updated to MaxReachableLinkMetric (0xfffe). This document updates [RFC6987] and [RFC8770] with respect to the advertisement of MaxReachableLinkMetric rather than MaxLinkMetric.

When an OSPF router supports [RFC6987] and the Unreachable Link capability defined in this document, it MUST also support advertisement all its non-stub links with a link cost of MaxReachableLinkMetric (0xfffe). Since MaxLinkMetric will not be used to indicate a link is unreachable unless all OSPF routers in the area support this specification as specified in Section 3.2, all routers in the area will also support the usage of MaxReachableLinkMetric to discourage the usage of stub router links for transit traffic. If there are any OSPF routers in the area that do not support the Unreachable Link capability, then all OSPF routers in the area will treat links advertised with a cost MaxLinkMetric as reachable (Section 3.2).

An OSPFv3 router can simply advertise R-bit in its router-LSA options [RFC5340] to prevent usage stub router links for transit traffic. Similarly, OSPFv2 routers supporting [RFC8770] can advertise the H-bit in the router-LSA options.

3.4. Label Distribution Protocol (LDP) IGP Synchronization Backward Compatibility

LDP IGP Synchronization [RFC5443] specifies OSPF advertisement of MaxLinkMetric (0xffff) to indicate that while the OSPF adjacency is in FULL state, LDP has not been synchronized between the two neighbors and transit IP traffic is discouraged. When an OSPF router supports the Unreachable Link capability defined in this document, the usage of OSPF MaxLinkMetric (0xffff) to discourage usage of the link until LDP is "fully operational" MUST be updated to MaxReachableLinkMetric (0xfffe). It is important to keep the link in the topology to allow IP traffic to use the link as a last resort in case of LDP packets between OSPF router loopbacks addresses or a network failure. This document updates [RFC5443] with respect to the advertisement of MaxReachableLinkMetric rather than MaxLinkMetric.

4. Operational Considerations

4.1. Configuration Parameters

Support of the Unreachable Link capability SHOULD be configurable.

In some networks, the operator may still want links with maximum metric (0xffff) to be treated as reachable. For example, when the cost of links is automatically computed based on the inverse of the link's bandwidth and there is a mix of low-speed and high-speed links, the computation may result in the maximum metric. In this case, OSPF routers supporting this specification can disable the Unreachable Link capability and still treat links with maximum metric as reachable.

It is also RECOMMENDED that implementations supporting this document and auto-costing limit the maximum computed cost to MaxReachableLinkMetric (0xfffe). An example of auto-costing would be to automatically set the link metric to be inversely proportional to the link bandwidth (refer to the auto-cost feature in the ietf-ospf.yang [RFC9129]).

4.2. YANG Data Model

This section defines three YANG [RFC7950] modules. Module iana-ospf-functional-cap-bits defines the identities for OSPF Functional Capabilities as per the "OSPF Router Functional Capability Bits" IANA registry [IANA-OSPF-FC-Bits]. Module ietf-ospf-functional-capability and module ietf-ospf-unreachable-links can be used to configure and manage the usage of OSPF LSLinkInfinity for unreachable links as defined in this document, which augments the OSPF YANG data model [RFC9129] and the YANG Data Model for Routing Management [RFC8349].

This document uses the graphical representation of data model per [RFC8340].

4.2.1. Tree for OSPF Functional Capability

The following shows the tree diagram of the module for OSPF Functional Capability:

```
module: ietf-ospf-functional-capability
  augment /rt:routing/rt:control-plane-protocols
    /rt:control-plane-protocol/ospf:ospf/ospf:areas
    /ospf:area/ospf:interfaces/ospf:interface
    /ospf:database/ospf:link-scope-lsa-type
    /ospf:link-scope-lsas/ospf:link-scope-lsa/ospf:version
    /ospf:ospfv2/ospf:ospfv2/ospf:body/ospf:opaque
    /ospf:ri-opaque/ospf:router-capabilities-tlv:
  +--ro router-functional-capabilities
    +--ro functional-capability*  identityref
  augment /rt:routing/rt:control-plane-protocols
    /rt:control-plane-protocol/ospf:ospf/ospf:areas
    /ospf:area/ospf:database/ospf:area-scope-lsa-type
```



```

    /ospf:area-scope-lsas/ospf:area-scope-lsa/ospf:version
    /ospf:ospfv2/ospf:ospfv2/ospf:body/ospf:opaque
    /ospf:ri-opaque/ospf:router-capabilities-tlv:
  +--ro router-functional-capabilities
    +--ro functional-capability*   identityref
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ospf:ospf/ospf:database
  /ospf:as-scope-lsa-type/ospf:as-scope-lsas
  /ospf:as-scope-lsa/ospf:version/ospf:ospfv2
  /ospf:ospfv2/ospf:body/ospf:opaque/ospf:ri-opaque
  /ospf:router-capabilities-tlv:
+--ro router-functional-capabilities
  +--ro functional-capability*   identityref
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ospf:ospf/ospf:areas
  /ospf:area/ospf:interfaces/ospf:interface
  /ospf:database/ospf:link-scope-lsa-type
  /ospf:link-scope-lsas/ospf:link-scope-lsa/ospf:version
  /ospf:ospfv3/ospf:ospfv3/ospf:body
  /ospf:router-information/ospf:router-capabilities-tlv:
+--ro router-functional-capabilities
  +--ro functional-capability*   identityref
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ospf:ospf/ospf:database
  /ospf:as-scope-lsa-type/ospf:as-scope-lsas
  /ospf:as-scope-lsa/ospf:version/ospf:ospfv3
  /ospf:ospfv3/ospf:body/ospf:router-information
  /ospf:router-capabilities-tlv:
+--ro router-functional-capabilities
  +--ro functional-capability*   identityref
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ospf:ospf/ospf:areas
  /ospf:area/ospf:database/ospf:area-scope-lsa-type
  /ospf:area-scope-lsas/ospf:area-scope-lsa/ospf:version
  /ospf:ospfv3/ospf:ospfv3/ospf:body
  /ospf:router-information/ospf:router-capabilities-tlv:
+--ro router-functional-capabilities
  +--ro functional-capability*   identityref

```

4.2.2. Tree for OSPF Advertising Unreachable Links

The following shows the tree diagram of the module for OSPF Advertising Unreachable Links:

```
module: ietf-ospf-unreachable-links
  augment /rt:routing/rt:control-plane-protocols
    /rt:control-plane-protocol/ospf:ospf:
      +--rw unreachable-link-advertisement
        +--rw enabled?    boolean
```

4.2.3. IANA Module for OSPF Functional Capability Bits

IANA has created a registry titled "OSPF Router Functional Capability Bits" under the "Open Shortest Path First (OSPF) Parameters" registry group to identify OSPF Router Functional Capabilities. Module `iana-ospf-functional-cap-bits` is an IANA-maintained module, which defines the identities for the OSPF Functional Capabilities as in the IANA "OSPF Router Functional Capability Bits" registry.

This module is maintained by IANA and will be updated if and when there is any change to the registry.

This document defines the initial version of the IANA-maintained YANG module for OSPF Router Functional Capabilities that mirrors the IANA "OSPF Router Functional Capability Bits" registry [IANA-OSPF-FC-Bits]. The latest version of this YANG module is available at <https://www.iana.org/assignments/iana-ospf-functional-cap-bits/iana-ospf-functional-cap-bits.xhtml>.

Note to the RFC Editor: Please remove this module in the version to be published as RFC.

This document defines the initial version of the IANA-maintained YANG module for OSPF Router Functional Capabilities that mirrors the IANA "OSPF Router Functional Capability Bits" registry [IANA-OSPF-FC-Bits].

```
<CODE BEGINS> file "iana-ospf-functional-cap-bits@2026-01-28.yang"
module iana-ospf-functional-cap-bits {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:"
    + "iana-ospf-functional-cap-bits";
  prefix iana-ospf-fc-bits;

  organization
    "Internet Assigned Numbers Authority (IANA)";
  contact
    "Internet Assigned Numbers Authority

    ICANN
    12025 Waterfront Drive, Suite 300
```

Los Angeles, CA 90094-2536
United States of America

Tel: +1 310 301 5800
<mailto:iana@iana.org>;

description

"This YANG module defines the identities for OSPF Router
Functional Capabilities.

This YANG module is maintained by IANA and reflects the 'OSPF
Router Functional Capability Bits' registry.

Copyright (c) 2026 IETF Trust and the persons identified as
authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or
without modification, is permitted pursuant to, and subject
to the license terms contained in, the Revised BSD License
set forth in Section 4.c of the IETF Trust's Legal Provisions
Relating to IETF Documents
(<https://trustee.ietf.org/license-info>).

All revisions of IETF and IANA published modules can be found
at the YANG Parameters registry group
(<https://www.iana.org/assignments/yang-parameters>).

This initial version of this YANG module is part of RFC XXXX
(<https://www.rfc-editor.org/info/rfcXXXX>); see the RFC itself
for full legal notices.

The latest version of this YANG module is available at
<https://www.iana.org/assignments/yang-parameters>."

```
revision 2026-01-28 {  
  description  
    "Initial version";  
  reference  
    "RFC XXXX: Advertising Unreachable Links in OSPF";  
}
```

```
identity functional-capability {  
  description  
    "Base identity for OSPF Router Functional Capabilities. The  
    functional capabilities are defined in IANA OSPF Router  
    Functional Capability Bits registry.";  
}
```

```
identity unreachable-link {
```

```
    base functional-capability;
    description
        "Indicates that the OSPF router is capable of advertising
         unreachable links.";
    reference
        "RFC XXXX: Advertising Unreachable Links in OSPF";
  }
}
<CODE ENDS>
```

4.2.4. YANG Module for OSPF Functional Capability

The following is the YANG module for OSPF Functional Capability:

```
<CODE BEGINS> file "ietf-ospf-functional-capability@2026-01-28.yang"
module ietf-ospf-functional-capability {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:"
    + "ietf-ospf-functional-capability";
  prefix ospf-fc;

  import ietf-routing {
    prefix rt;
    reference
      "RFC 8349: A YANG Data Model for Routing Management
       (NMDA Version)";
  }
  import ietf-ospf {
    prefix ospf;
    reference
      "RFC 9129: YANG Data Model for the OSPF Protocol";
  }
  import iana-ospf-functional-cap-bits {
    prefix iana-ospf-fc-bits;
    reference
      "RFC XXXX: Advertising Unreachable Links in OSPF";
  }

  organization
    "IETF Link State Routing (LSR) Working Group";
  contact
    "WG Web:  <https://datatracker.ietf.org/wg/lsr/>
     WG List: <mailto:lsr@ietf.org>

     Author:  Yingzhen Qu
              <mailto:yqu@futurewei.com>
     Author:  Acee Lindem
              <mailto:acee.ietf@gmail.com>
```

Author: Liyan Gong
<mailto:gongliyan@chinamobile.com>
Author: Weiqiang Cheng
<mailto:chengweiqiang@chinamobile.com>
Author: Changwang Lin
<mailto:linchangwang.04414@h3c.com>
Author: Ran Chen
<mailto:chen.ran@zte.com.cn>;

description

"This YANG module defines the operational state for
Functional Capability in OSPF as defined in RFC 7770.

Copyright (c) 2026 IETF Trust and the persons identified as
authors of the code. All rights reserved.
Redistribution and use in source and binary forms, with or
without modification, is permitted pursuant to, and subject
to the license terms contained in, the Revised BSD License
set forth in Section 4.c of the IETF Trust's Legal Provisions
Relating to IETF Documents
(<https://trustee.ietf.org/license-info>).

All revisions of IETF and IANA published modules can be found
at the YANG Parameters registry group
(<https://www.iana.org/assignments/yang-parameters>).

This version of this YANG module is part of RFC XXXX; see
the RFC itself for full legal notices.";

revision 2026-01-28 {

description

"Initial version";

reference

"RFC XXXX: Advertising Unreachable Links in OSPF";

}

grouping router-functional-capabilities {

description

"Grouping for OSPF router capabilities TLV types.";

reference

"RFC 7770: Extensions to OSPF for Advertising Optional
Router Capabilities";

container router-functional-capabilities {

leaf-list functional-capability {

type identityref {

base iana-ospf-fc-bits:functional-capability;

}

description

"List of functional capabilities. This list

```
        contains the identities for the functional
        capabilities supported by the router.";
    }
    description
        "OSPF Router Functional identity definitions.";
}
}

augment "/rt:routing/"
+ "rt:control-plane-protocols/rt:control-plane-protocol/"
+ "ospf:ospf/ospf:areas/ospf:area/"
+ "ospf:interfaces/ospf:interface/ospf:database/"
+ "ospf:link-scope-lsa-type/ospf:link-scope-lsas/"
+ "ospf:link-scope-lsa/ospf:version/ospf:ospfv2/"
+ "ospf:ospfv2/ospf:body/ospf:opaque/ospf:ri-opaque/"
+ "ospf:router-capabilities-tlv" {
when "derived-from-or-self(/rt:routing/"
+ "rt:control-plane-protocols/"
+ "rt:control-plane-protocol/rt:type, 'ospf:ospfv2')" {
    description
        "This augmentation is only valid for OSPFv2.";
}
description
    "OSPFv2 Opaque Link-Scoped Router-Information LSA Router
    Functional capabilities.";
uses router-functional-capabilities;
reference
    "RFC 7770: Extensions to OSPF for Advertising Optional
    Router Capabilities";
}

augment "/rt:routing/"
+ "rt:control-plane-protocols/rt:control-plane-protocol/"
+ "ospf:ospf/ospf:areas/"
+ "ospf:area/ospf:database/"
+ "ospf:area-scope-lsa-type/ospf:area-scope-lsas/"
+ "ospf:area-scope-lsa/ospf:version/ospf:ospfv2/"
+ "ospf:ospfv2/ospf:body/ospf:opaque/"
+ "ospf:ri-opaque/ospf:router-capabilities-tlv" {
when "derived-from-or-self(/rt:routing/"
+ "rt:control-plane-protocols/"
+ "rt:control-plane-protocol/rt:type, 'ospf:ospfv2')" {
    description
        "This augmentation is only valid for OSPFv2.";
}
description
    "OSPFv2 Opaque Area-Scoped Router-Information LSA Router
    Functional capabilities.";
```

```
    uses router-functional-capabilities;
    reference
      "RFC 7770: Extensions to OSPF for Advertising Optional
        Router Capabilities";
  }

  augment "/rt:routing/"
    + "rt:control-plane-protocols/rt:control-plane-protocol/"
    + "ospf:ospf/ospf:database/"
    + "ospf:as-scope-lsa-type/ospf:as-scope-lsas/"
    + "ospf:as-scope-lsa/ospf:version/ospf:ospfv2/"
    + "ospf:ospfv2/ospf:body/ospf:opaque/"
    + "ospf:ri-opaque/ospf:router-capabilities-tlv" {
    when "derived-from-or-self(/rt:routing/"
      + "rt:control-plane-protocols/"
      + "rt:control-plane-protocol/rt:type, 'ospf:ospfv2')" {
      description
        "This augmentation is only valid for OSPFv2.";
    }
    description
      "OSPFv2 Opaque AS-Scoped Router-Information LSA Router
        Functional capabilities.";
    uses router-functional-capabilities;
    reference
      "RFC 7770: Extensions to OSPF for Advertising Optional
        Router Capabilities";
  }

  augment "/rt:routing/"
    + "rt:control-plane-protocols/rt:control-plane-protocol/"
    + "ospf:ospf/ospf:areas/ospf:area/"
    + "ospf:interfaces/ospf:interface/ospf:database/"
    + "ospf:link-scope-lsa-type/ospf:link-scope-lsas/"
    + "ospf:link-scope-lsa/ospf:version/ospf:ospfv3/"
    + "ospf:ospfv3/ospf:body/ospf:router-information/"
    + "ospf:router-capabilities-tlv" {
    when "derived-from-or-self(/rt:routing/"
      + "rt:control-plane-protocols/"
      + "rt:control-plane-protocol/rt:type, 'ospf:ospfv3')" {
      description
        "This augmentation is only valid for OSPFv3.";
    }
    description
      "OSPFv3 Link-Scoped Router-Information LSA Router
        Functional capabilities.";
    uses router-functional-capabilities;
    reference
      "RFC 7770: Extensions to OSPF for Advertising Optional
```

```

        Router Capabilities";
    }

    augment "/rt:routing/"
        + "rt:control-plane-protocols/rt:control-plane-protocol/"
        + "ospf:ospf/ospf:database/"
        + "ospf:as-scope-lsa-type/ospf:as-scope-lsas/"
        + "ospf:as-scope-lsa/ospf:version/ospf:ospfv3/"
        + "ospf:ospfv3/ospf:body/ospf:router-information/"
        + "ospf:router-capabilities-tlv" {
    when "derived-from-or-self(/rt:routing/"
        + "rt:control-plane-protocols/"
        + "rt:control-plane-protocol/rt:type, 'ospf:ospfv3')" {
    description
        "This augmentation is only valid for OSPFv3.";
    }
    description
        "OSPFv3 Area-Scoped Router-Information LSA Router
        Functional capabilities.";
    uses router-functional-capabilities;
    reference
        "RFC 7770: Extensions to OSPF for Advertising Optional
        Router Capabilities";
    }

    augment "/rt:routing/"
        + "rt:control-plane-protocols/rt:control-plane-protocol/"
        + "ospf:ospf/ospf:areas/"
        + "ospf:area/ospf:database/"
        + "ospf:area-scope-lsa-type/ospf:area-scope-lsas/"
        + "ospf:area-scope-lsa/ospf:version/ospf:ospfv3/"
        + "ospf:ospfv3/ospf:body/ospf:router-information/"
        + "ospf:router-capabilities-tlv" {
    when "derived-from-or-self(/rt:routing/"
        + "rt:control-plane-protocols/"
        + "rt:control-plane-protocol/rt:type, 'ospf:ospfv3')" {
    description
        "This augmentation is only valid for OSPFv3.";
    }
    description
        "OSPFv3 AS-Scoped Router-Information LSA Router
        Functional capabilities.";
    uses router-functional-capabilities;
    reference
        "RFC 7770: Extensions to OSPF for Advertising Optional
        Router Capabilities";
    }
}
```


<CODE ENDS>

4.2.5. YANG Module for OSPF Advertising Unreachable Links

The following is the YANG module for OSPF Advertising Unreachable Links:

```
<CODE BEGINS> file "ietf-ospf-unreachable-links@2026-01-28.yang"
module ietf-ospf-unreachable-links {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:"
    + "ietf-ospf-unreachable-links";
  prefix ospf-unreach-link;

  import ietf-routing {
    prefix rt;
    reference
      "RFC 8349: A YANG Data Model for Routing Management
       (NMDA Version)";
  }
  import ietf-ospf {
    prefix ospf;
    reference
      "RFC 9129: YANG Data Model for the OSPF Protocol";
  }

  organization
    "IETF Link State Routing (LSR) Working Group";
  contact
    "WG Web:  <https://datatracker.ietf.org/wg/lsr/>
     WG List:  <mailto:lsr@ietf.org>

     Author:   Yingzhen Qu
               <mailto:yqu@futurewei.com>
     Author:   Acee Lindem
               <mailto:acee.ietf@gmail.com>
     Author:   Liyan Gong
               <mailto:gongliyan@chinamobile.com>
     Author:   Weiqiang Cheng
               <mailto:chengweiqiang@chinamobile.com>
     Author:   Changwang Lin
               <mailto:linchangwang.04414@h3c.com>
     Author:   Ran Chen
               <mailto:chen.ran@zte.com.cn>";

  description
    "This YANG module defines the configuration and operational
     state for Advertising Unreachable Links in OSPF as defined
     in RFC XXXX."
```

Copyright (c) 2026 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Revised BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

All revisions of IETF and IANA published modules can be found at the YANG Parameters registry group (<https://www.iana.org/assignments/yang-parameters>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices.";

```
revision 2026-01-28 {
  description
    "Initial version";
  reference
    "RFC XXXX: Advertising Unreachable Links in OSPF";
}

augment "/rt:routing/rt:control-plane-protocols"
  + "/rt:control-plane-protocol/ospf:ospf" {
  when "derived-from-or-self(..rt:type, 'ospf:ospfv2') or "
    + "derived-from-or-self(..rt:type, 'ospf:ospfv3')" {
    description
      "This augments the OSPF routing protocol when used.";
  }
  description
    "This augments OSPF protocol with unreachable link
    advertisement.";
  container unreachable-link-advertisement {
    leaf enabled {
      type boolean;
      default "false";
      description
        "Controls advertisement of unreachable links.
        It is enabled when set to true and disabled
        when set to false.";
    }
    description
      "OSPF unreachable link advertisement parameters.";
  }
}
```

<CODE ENDS>

5. Security Considerations

A compromised OSPF router could advertise changes to its Unreachable Link capability rapidly resulting in repeated route recalculations on routers in the area supporting this specification (Section 3.2). Hence, it is RECOMMENDED that routers supporting this specification also support the SPF back-off delay algorithm described in [RFC8405].

The security considerations for [RFC2328], [RFC5340], [RFC6987], and [RFC7770] are also applicable to this protocol extension.

The ietf-ospf-unreachable-links YANG module and the ietf-ospf-functional-capability YANG module each define a data model that is designed to be accessed via YANG-based management protocols, such as NETCONF [RFC6241] and RESTCONF [RFC8040]. These YANG-based management protocols (1) have to use a secure transport layer (e.g., SSH [RFC4252], TLS [I-D.ietf-tls-rfc8446bis], and QUIC [RFC9000]) and (2) have to use mutual authentication.

The NETCONF Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a pre-configured subset of all available NETCONF or RESTCONF protocol operations and content.

The following data nodes defined in the ietf-ospf-unreachable-links YANG module that are writable/creatable/deletable (i.e., config true, which is the default). The modification of these data nodes without proper protection can prevent interpretation of the OSPF LSLinkInfinity metric as unreachable.

```
/ospf:ospf/ospf-unreach-link:unreachable-link-advertisement/ospf-  
unreach-link:enabled
```

Some of the readable data nodes in the ietf-ospf-unreachable-links YANG module may be considered sensitive or vulnerable in some network environments. Exposure of the OSPF link state database may be useful in mounting a Denial-of-Service (DoS) attacks. These are the readable data nodes:

```
/ospf:ospf/ospf-unreach-link:unreachable-link-advertisement/ospf-  
unreach-link:enabled
```

6. IANA Considerations

Name: iana-ospf-functional-cap-bits
Maintained by IANA? Y
Namespace: urn:ietf:params:xml:ns:yang:iana-ospf-functional-cap-bits
Prefix: iana-ospf-fc-bits
Reference: RFC XXXX

Name: ietf-ospf-functional-capability
Maintained by IANA? N
Namespace: urn:ietf:params:xml:ns:yang:
 ietf-ospf-functional-capability
Prefix: ospf-fc
Reference: RFC XXXX

Name: ietf-ospf-unreachable-links
Maintained by IANA? N
Namespace: urn:ietf:params:xml:ns:yang:ietf-ospf-unreachable-links
Prefix: ospf-unreach-link
Reference: RFC XXXX

6.3. IANA Module for OSPF Functional Capability Bits

This document defines the initial version of the IANA-maintained "iana-ospf-functional-cap-bits" YANG module (Section 4.2). The most recent version of the YANG module is available from the "YANG Parameters" registry [IANA-YANG-Parameters].

IANA is requested to add this note to the registry:

```
| New values must not be directly added to the "iana-ospf-  
| functional-cap-bits" YANG module. They must instead be added to  
| the "OSPF Router Functional Capability Bits" registry in the "Open  
| Shortest Path First (OSPF) Parameters" registry group  
| [IANA-OSPF-FC-Bits].
```

When a value is added to the "OSPF Router Functional Capability Bits" registry, a new "identity" statement needs to be added to the "iana-ospf-functional-cap-bits" YANG module. The name of the "identity" is the lower-case name provided in the registry with all spaces replaced with "-". The "identity" statement should have the following sub-statements defined:

"base": Contains 'functional-capability'.

"description": Contains the non-abbreviated OSPF capability bit name from the registry.

"reference": Replicates the reference(s) from the registry with the title of the document(s) added.

IANA is requested to add this note to [IANA-OSPF-FC-Bits]:

```
| When this registry is modified, the YANG module "iana-ospf-  
| functional-cap-bits" must be updated as defined in RFC XXXX.
```

7. Contributors

The following individuals have contributed to this document:

Mengxiao Chen
New H3C Technologies
China
Email: chen.mengxiao@h3c.com

Yanrong Liang
Ruijie Networks Co., Ltd.
China
Email: liangyanrong@ruijie.com.cn

8. Acknowledgments

Thanks to Yingzhen Qu for providing the YANG model.

Thanks to Dhruv Dhody for OPS Directorate review and comments.

Thanks to Gunter van de Velde for review and comments.

Thanks to Mohamed Boucadair for review and comments.

9. References

9.1. Normative References

- [IANA-OSPF-FC-Bits]
IANA, "OSPF Router Functional Capability Bits",
<<https://www.iana.org/assignments/ospf-parameters>>.
- [IANA-YANG-Parameters]
IANA, "YANG Module Names",
<<https://www.iana.org/assignments/yang-parameters>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

- [RFC2328] Moy, J., "OSPF Version 2", STD 54, RFC 2328, DOI 10.17487/RFC2328, April 1998, <<https://www.rfc-editor.org/info/rfc2328>>.
- [RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/info/rfc3688>>.
- [RFC4915] Psenak, P., Mirtorabi, S., Roy, A., Nguyen, L., and P. Pillay-Esnault, "Multi-Topology (MT) Routing in OSPF", RFC 4915, DOI 10.17487/RFC4915, June 2007, <<https://www.rfc-editor.org/info/rfc4915>>.
- [RFC5443] Jork, M., Atlas, A., and L. Fang, "LDP IGP Synchronization", RFC 5443, DOI 10.17487/RFC5443, March 2009, <<https://www.rfc-editor.org/info/rfc5443>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.
- [RFC6987] Retana, A., Nguyen, L., Zinin, A., White, R., and D. McPherson, "OSPF Stub Router Advertisement", RFC 6987, DOI 10.17487/RFC6987, September 2013, <<https://www.rfc-editor.org/info/rfc6987>>.
- [RFC7684] Psenak, P., Gredler, H., Shakir, R., Henderickx, W., Tantsura, J., and A. Lindem, "OSPFv2 Prefix/Link Attribute Advertisement", RFC 7684, DOI 10.17487/RFC7684, November 2015, <<https://www.rfc-editor.org/info/rfc7684>>.
- [RFC7770] Lindem, A., Ed., Shen, N., Vasseur, JP., Aggarwal, R., and S. Shaffer, "Extensions to OSPF for Advertising Optional Router Capabilities", RFC 7770, DOI 10.17487/RFC7770, February 2016, <<https://www.rfc-editor.org/info/rfc7770>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, RFC 8341, DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8349] Lhotka, L., Lindem, A., and Y. Qu, "A YANG Data Model for Routing Management (NMDA Version)", RFC 8349, DOI 10.17487/RFC8349, March 2018, <<https://www.rfc-editor.org/info/rfc8349>>.
- [RFC8362] Lindem, A., Roy, A., Goethals, D., Reddy Vallem, V., and F. Baker, "OSPFv3 Link State Advertisement (LSA) Extensibility", RFC 8362, DOI 10.17487/RFC8362, April 2018, <<https://www.rfc-editor.org/info/rfc8362>>.
- [RFC8405] Decraene, B., Litkowski, S., Gredler, H., Lindem, A., Francois, P., and C. Bowers, "Shortest Path First (SPF) Back-Off Delay Algorithm for Link-State IGPs", RFC 8405, DOI 10.17487/RFC8405, June 2018, <<https://www.rfc-editor.org/info/rfc8405>>.
- [RFC8770] Patel, K., Pillay-Esnault, P., Bhardwaj, M., and S. Bayraktar, "Host Router Support for OSPFv2", RFC 8770, DOI 10.17487/RFC8770, April 2020, <<https://www.rfc-editor.org/info/rfc8770>>.
- [RFC9129] Yeung, D., Qu, Y., Zhang, Z., Chen, I., and A. Lindem, "YANG Data Model for the OSPF Protocol", RFC 9129, DOI 10.17487/RFC9129, October 2022, <<https://www.rfc-editor.org/info/rfc9129>>.
- [RFC9350] Psenak, P., Ed., Hegde, S., Filsfils, C., Talaulikar, K., and A. Gulko, "IGP Flexible Algorithm", RFC 9350, DOI 10.17487/RFC9350, February 2023, <<https://www.rfc-editor.org/info/rfc9350>>.

9.2. Informative References

- [I-D.ietf-tls-rfc8446bis] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", Work in Progress, Internet-Draft, draft-ietf-tls-rfc8446bis-14, 13 September 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-tls-rfc8446bis-14>>.
- [RFC4252] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Authentication Protocol", RFC 4252, DOI 10.17487/RFC4252, January 2006, <<https://www.rfc-editor.org/info/rfc4252>>.

- [RFC5340] Coltun, R., Ferguson, D., Moy, J., and A. Lindem, "OSPF for IPv6", RFC 5340, DOI 10.17487/RFC5340, July 2008, <<https://www.rfc-editor.org/info/rfc5340>>.
- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC7308] Osborne, E., "Extended Administrative Groups in MPLS Traffic Engineering (MPLS-TE)", RFC 7308, DOI 10.17487/RFC7308, July 2014, <<https://www.rfc-editor.org/info/rfc7308>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.
- [RFC9000] Iyengar, J., Ed. and M. Thomson, Ed., "QUIC: A UDP-Based Multiplexed and Secure Transport", RFC 9000, DOI 10.17487/RFC9000, May 2021, <<https://www.rfc-editor.org/info/rfc9000>>.

Authors' Addresses

Liyan Gong
China Mobile
China
Email: gongliyan@chinamobile.com

Weiqiang Cheng
China Mobile
China
Email: chengweiqiang@chinamobile.com

Changwang Lin
New H3C Technologies
China
Email: linchangwang.04414@h3c.com

Acee Lindem
Arrcus, Inc.
United States of America
Email: acee.ietf@gmail.com

Ran Chen
ZTE Corporation
China
Email: chen.ran@zte.com.cn