

PCE Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: 27 August 2026

M. Fizgeer  
O. Bachar  
Ribbon Communications  
23 February 2026

PCEP Extensions to support BFD parameters  
draft-ietf-pce-pcep-bfd-parameters-02

## Abstract

This document proposes extension to PCEP to configure LSP parameters. Some of LSP parameters are needed to configure S-BFD for candidate paths. Each candidate path is identified in PCEP by its uniquely assigned PLSP-ID. The mechanism proposed in this document is applicable to all path setup types. This extension can work with different PCEP Path Setup Types but especially suitable for Segment Routing (SR-MPLS, SRv6)..

## Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 27 August 2026.

## Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	2
2. Terminology . . . . .	3
3. Motivation . . . . .	4
4. Overview of Protocol Extensions . . . . .	4
4.1. Overview . . . . .	4
4.2. Processing . . . . .	4
4.3. Objects and TLVs . . . . .	5
4.3.1. LSP S-BFD Capability . . . . .	5
4.3.2. S-BFD parameters . . . . .	6
5. Error Handling . . . . .	8
6. Implementation Note . . . . .	8
7. IANA Considerations . . . . .	8
7.1. PCEP TLV Type Indicators . . . . .	8
7.2. PCEP Errors . . . . .	9
8. Security Considerations . . . . .	9
9. Implementation Status [Note to the RFC Editor - remove this section before publication, as well as remove the reference to RFC 7942.] . . . . .	10
10. Acknowledgement . . . . .	10
11. References . . . . .	10
11.1. Normative References . . . . .	10
11.2. Informative References . . . . .	11
Appendix A. Contributors . . . . .	12
Authors' Addresses . . . . .	12

## 1. Introduction

Path Computation Element (PCE) Communication Protocol (PCEP) [RFC5440] enables the communication between a Path Computation Client (PCC) and a Path Computation Element (PCE), or between two PCEs based on the PCE architecture [RFC4655].

PCEP Extensions for the Stateful PCE Model [RFC8231] describes a set of extensions to PCEP to enable active control of Multiprotocol Label Switching Traffic Engineering (MPLS-TE) and Generalized MPLS (GMPLS) tunnels. [RFC8281] describes the setup and teardown of PCE-initiated LSPs under the active stateful PCE model, without the need for local configuration on the PCC, thus allowing for dynamic centralized control of a network.

PCEP Extensions for Segment Routing [RFC8664] specifies extensions to the Path Computation Element Protocol (PCEP) that allow a stateful PCE to compute and initiate Traffic Engineering (TE) paths, as well as a PCC to request a path subject to certain constraint(s) and optimization criteria in SR networks.

PCEP Extensions for Establishing Relationships Between Sets of LSPs [RFC8697] introduces a generic mechanism to create a grouping of LSPs which can then be used to define associations between a set of LSPs and a set of attributes (such as configuration parameters or behaviors) and is equally applicable to stateful PCE (active and passive modes) and stateless PCE.

This document specifies PCEP extensions to signal additional information to configure LSP attributes. This is accomplished via the use of the existing LSPA object, by defining a new capability and new TLVs. This is applicable and need for stateful PCE.

## 2. Terminology

The following terminologies are used in this document:

- \* PCC: Path Computation Client. Any client application requesting a path computation to be performed by a Path Computation Element.
- \* PCE: Path Computation Element. An entity (component, application, or network node) that is capable of computing a network path or route based on a network graph and applying computational constraints.
- \* PCEP: Path Computation Element Protocol.
- \* PCEP Tunnel: The entity. identified by the PLSP-ID, as per [I-D.koldychev-pce-operational].
- \* LSP: Label Switched Path.
- \* LSPA: LSP Attributes.
- \* PCT: Path Setup Type.

### 3. Motivation

S-BFD [RFC7880] protocol is used for detecting failures in different tunnels path setup types. There are several protocol parameters that need to be configured and exchanged between PCEP speakers. As the parameters are associated to LSPs or tunnels, they are exchanged via PCEP. The LSPS-BFD-Capability TLV, the LSP-S-BFD TLV and its sub-TLVs, defined in this document, allow PCEP speakers to exchange additional information about S-BFD.

### 4. Overview of Protocol Extensions

#### 4.1. Overview

A new option to define S-BFD parameters is defined in this document.

A PCEP speaker indicates its ability to support S-BFD parameters during the PCEP initialization phase, as follows. When the PCEP session is created, it sends an Open message with an OPEN object that contains the LSP-S-BFD-Capability TLV (see Section 4.3.1).

If a PCEP speaker receives the PCEP LSP-S-BFD-Capability TLV with B flag = 1 in the Open object, then it means its peer is capable to receive and to send S-BFD TLVs towards that peer.

If a PCEP speaker has not received this TLV in the Open object, or if it receives it with B flag set to 0, then it MUST NOT send any S-BFD TLVs in LSPA object towards that peer.

Defining S-BFD parameters via PCEP MAY be also used together with a PCE as a Central Controller (PCECC) architecture and procedures [RFC9050].

#### 4.2. Processing

If a PCEP speaker is capable of S-BFD and its peer is capable of S-BFD, then the PCEP speaker MAY send LSP-S-BFD TLV towards that peer, to report the S-BFD state (Enabled/Disabled) for the configured LSP. The LSP-S-BFD TLV SHALL be sent as an optional TLV in the LSPA object. A PCC SHALL send it in the PCRpt message.

A PCE SHALL send it in the PCInit or in the PCUpd message. If the LSP-S-BFD TLV is received from a PCEP peer with the B flag set to 1, then S-BFD SHALL be applied for specified LSP. If PCC received this TLV via PCUpd with B=0 and there is no S-BFD applied for the LSP, then the PCC SHALL ignore the TLV.

If PCE received this TLV with B=0 and there is no S-BFD applied for the LSP (editing a PCC-initiated LSP) then it MAY ignore it. If B=0 and LSP-BFD-Parameters sub-TLV is received, then the PCEP speaker MAY ignore the sub-TLV. Ignoring or saving the S-BFD configuration is implementation decision.

Editor note: Alternatively, it can be defined implicitly as follows: If the LSP-S-BFD TLV is not received from PCEP peer but there is S-BFD for that LSP then S-BFD SHALL be removed for specified LSP.

### 4.3. Objects and TLVs

#### 4.3.1. LSP S-BFD Capability

The LSP-S-BFD-Capability TLV is an optional TLV. It MAY be carried within an OPEN object sent by PCEP speaker in an Open message to a PCEP peer to indicate it supports S-BFD capability. A legacy PCEP speaker (that does not recognize the LSP-S-BFD-Capability TLV) MUST ignore the TLV in accordance with [ RFC5440].

The LSP-S-BFD-Capability TLV has the following format:

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1								
Type										Length																													
Reserved										B										Num of PSTs																			
PST#1										...										PST#N										Padding									

Type: TBD1

Length: 4

B flag: A PCEP speaker sets this bit to 1 to indicate that it is capable of S-BFD, and it supports configuring the S-BFD via PCEP

Num of PSTs: The number of PSTs in the following list, excluding padding.

List of PSTs: A list of the PSTs that the PCEP speaker supports. Each PST is a single byte in length. Duplicate entries in this list MUST be ignored. The PCEP speaker MUST pad the list with zeros so that it is a multiple of four bytes in length.

This document defines the following PST value: \* PST = 0: Path is set up using the RSVP-TE signaling protocol \* PST = 1: Path is set up using the SR-TE

Any PST defined in this capability MUST be defined in PCEP session supported PST capability list. If some PST value in this list is not defined PCEP session supported PST capability list, PCEP speaker MUST send a PCerr message with Error-Type = 21 (Invalid traffic engineering path setup type) and Error-value = 2 (Mismatched path setup type) and close the PCEP session.


If the PCEP speaker and its peer have no S-BFD PSTs in common, then PCEP speaker cannot define S-BFD in any created LSP using PCEP. Creation locally LSP with S-BFD in PCC may be decision as local policy, but S-BFD parameters SHALL NOT be sent to PCE via PCEP.

#### 4.3.2. S-BFD parameters

##### 4.3.2.1. LSP S-BFD TLV

The PCEP LSP-S-BFD TLV is an optional TLV. It MAY be carried within the LSPA object.

The PCEP LSP-S-BFD TLV has the following format:

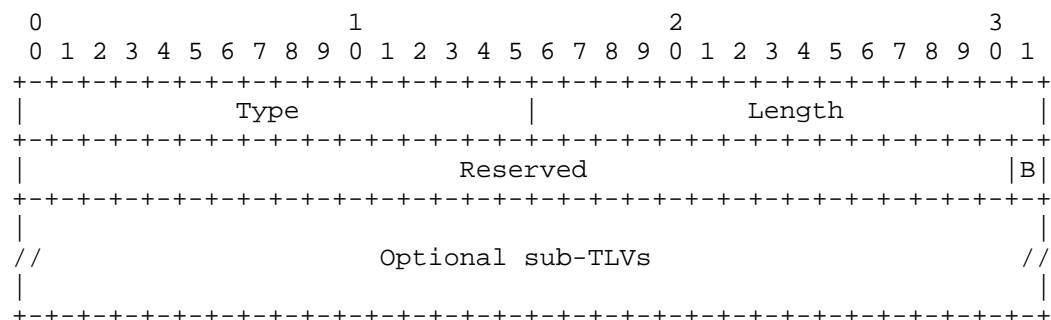


Type: TBD2

Length: The total length in bytes of the remainder of the TLV, that is, excluding the Type and Length fields.

B flag: Enable/Disable S-BFD for this LSP. If B=1 then S-BFD will be enabled. If B=0 then S-BFD will be disabled for that LSP. If the PCEP speaker received LSP-S-BFD TLV from PCEP peer with B flag is set to 0, then S-BFD SHALL be removed (in case of PCE update) or SHALL NOT be applied (in case of PCE initiated message) for specified LSP

## 4.3.2.2. LSP-S-BFD Parameters sub-TLV

The PCEP LSP-S-BFD-Parameters sub-TLV is optional. It MAY be carried within the LSP-S-BFD TLV. The PCEP LSP-S-BFD-Parameters sub-TLV has the following format:

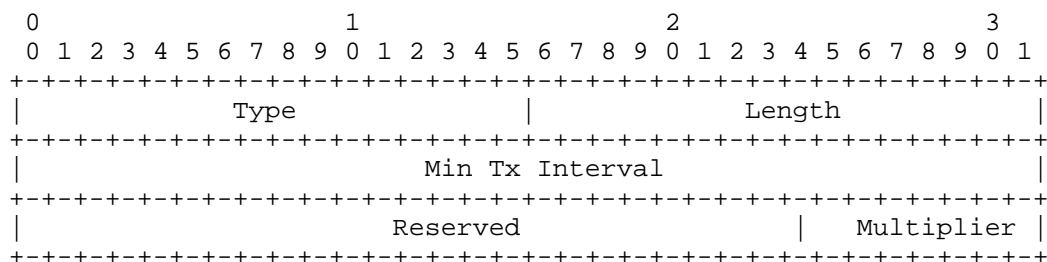

Type: TBD3

Length: 8


Min Tx Interval: 32 bits - Specify the Minimal Transmit Interval (microseconds).

Multiplier: 1..255

If B=0 and LSP-S-BFD-Parameters sub-TLV is received, then the PCEP speaker SHALL ignore the sub-TLV.

## 4.3.2.3. LSP-S-BFD-Discriminator sub-TLV

The PCEP LSP-S-BFD-Discriminator sub-TLV and is optional. It MAY be carried within the LSP-S-BFD TLV. The PCEP LSP-S-BFD-Discriminator sub-TLV has the following format:

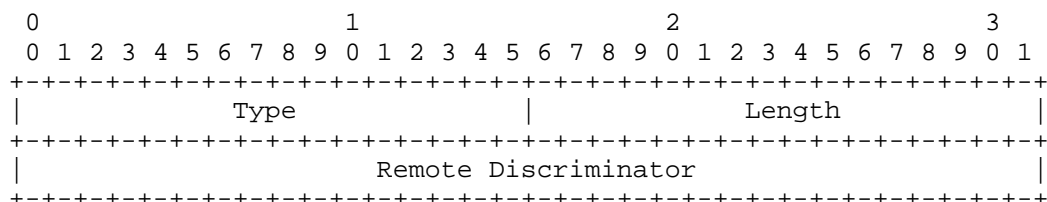

Type: TBD4

Length: 4

Remote Discriminator: 32 bits

If speaker sends S-BFD TLV with B flag 1, then LSP-S-BFD-Discriminator sub TLV is MUST.

In this case if this sub TLV is missed, PCEP speaker SHALL Error-Type=6 "Mandatory Object missing" with Error-value TBD9 "LSP-S-BFD-Discriminator".

If B flag is 0 and LSP-S-BFD-Discriminator sub-TLV is received, then the PCEP speaker SHALL ignore the LSP-S-BFD-Discriminator sub-TLV.

## 5. Error Handling

If a PCEP speaker has not received S-BFD-Capability TLV from a peer in the Open object, and it received an LSP S-BFD TLV (see Section 4.3.2.1) from that peer, then it MUST ignore the content of the LSP S-BFD TLV, and it MUST return a PCErr message with Error-Type=19 "Invalid Operation" with Error-value = TBD5 "S-BFD capability is not negotiated".

If Multiplier value in the LSP-S-BFD-Parameters sub-TLV is not in the legal range (1..255), then the PCEP Speaker MUST return a PCErr message with Error-Type=23 "Bad parameter value" and Error-value = TBD6 "Multiplier is out of range".

## 6. Implementation Note

In some implementations there is limitation that LSPs in the same association group must have same S-BFD parameter values. If either the Min Tx Interval, the Multiplier or the Remote Discriminator values received in the LSP-BFD Parameters sub-TLVs for LSPs that are members in the same Association Group are not identical, then the PCEP Speaker SHOULD return a PCErr message with Error-Type=26 "Association Error" with Error-value TBD7 "Invalid S-BFD parameter value".

## 7. IANA Considerations

### 7.1. PCEP TLV Type Indicators

This document defines new TLVs and sub-TLVs for carrying additional information about S-BFD. IANA is requested to make the assignment of new values for the existing "PCEP TLV Type Indicators" registry as follows:



Value	Description	Reference
TBD1	LSP-S-BFD-Capability TLV	This document
TBD2	LSP-S-BFD TLV	This document
TBD3	LSP-BFD-Parameters sub-TLV	This document
TBD4	LSP-S-BFD-DISCRIMINATOR sub-TLV	This document

Figure 1

## 7.2. PCEP Errors

This document defines new Error-Values within the different Error-Types. IANA is requested to allocate new types:

Error Type	Error Value	Meaning	Reference
19	TBD5	S-BFD capability is not negotiated	This document
23	TBD6	Multiplier is out of range	This document
26	TBD7	Invalid S-BFD parameter value	This document
23	TBD8	Remote Discriminator is out of range	This document
6	TBD9	LSP-S-BFD-Discriminator missing	This document

## 8. Security Considerations

This document defines new LSP parameters, which do not add any new security concerns beyond those discussed in [RFC5440], [RFC8231], [RFC8664], [RFC5880] and [RFC8697] in itself.

## 9. Implementation Status [Note to the RFC Editor - remove this section before publication, as well as remove the reference to RFC 7942.]

This section records the status of known implementations of the protocol defined by this specification at the time of posting of this Internet-Draft, and is based on a proposal described in [RFC7942]. The description of implementations in this section is intended to assist the IETF in its decision processes in progressing drafts to RFCs. Please note that the listing of any individual implementation here does not imply endorsement by the IETF. Furthermore, no effort has been spent to verify the information presented here that was supplied by IETF contributors. This is not intended as, and must not be construed to be, a catalog of available implementations or their features. Readers are advised to note that other implementations may exist.

In some implementations there is limitation that LSPs in the same association group must have same S-BFD parameter values.

According to [RFC7942], "this will allow reviewers and working groups to assign due consideration to documents that have the benefit of running code, which may serve as evidence of valuable experimentation and feedback that have made the implemented protocols more mature. It is up to the individual working groups to use this information as they see fit".

### 9.1. Ribbon Implementation

Organization: Ribbon Communications

Implementation: Head-end (PCC) and controller (PCE).

Description: All features supported with limitation that LSPs in the same association group must have same S-BFD parameter values

Maturity Level: Production.

Coverage: Full.

Contact: marina.fizgeer@rbbn.com

## 10. Acknowledgement

Would like to thank Avantika Sushil, Alexander Ferdman, Itay Katz, Galina Mintz and Boris Khasanov for review and suggestions.

## 11. References

### 11.1. Normative References

- [RFC7880] Pignataro, C., "Key words for use in RFCs to Indicate Requirement Levels", RFC 7880, DOI DOI 10.17487/RFC7880, July 2016, <<http://www.rfc-editor.org/info/rfc7880>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC5440] Vasseur, JP., Ed. and JL. Le Roux, Ed., "Path Computation Element (PCE) Communication Protocol (PCEP)", RFC 5440, DOI 10.17487/RFC5440, March 2009, <<https://www.rfc-editor.org/info/rfc5440>>.
- [RFC8231] Crabbe, E., Minei, I., Medved, J., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for Stateful PCE", RFC 8231, DOI 10.17487/RFC8231, September 2017, <<https://www.rfc-editor.org/info/rfc8231>>.
- [RFC8281] Crabbe, E., Minei, I., Sivabalan, S., and R. Varga, "Path Computation Element Communication Protocol (PCEP) Extensions for PCE-Initiated LSP Setup in a Stateful PCE Model", RFC 8281, DOI 10.17487/RFC8281, December 2017, <<https://www.rfc-editor.org/info/rfc8281>>.
- [RFC8697] Minei, I., Crabbe, E., Sivabalan, S., Ananthakrishnan, H., Dhody, D., and Y. Tanaka, "Path Computation Element Communication Protocol (PCEP) Extensions for Establishing Relationships between Sets of Label Switched Paths (LSPs)", RFC 8697, DOI 10.17487/RFC8697, January 2020, <<https://www.rfc-editor.org/info/rfc8697>>.
- [RFC5880] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD)", RFC 5880, DOI 10.17487/RFC5880, June 2010, <<https://www.rfc-editor.org/info/rfc5880>>.
- [RFC8664] Sivabalan, S., Filsfils, C., Tantsura, J., Henderickx, W., and J. Hardwick, "Path Computation Element Communication Protocol (PCEP) Extensions for Segment Routing", RFC 8664, DOI 10.17487/RFC8664, December 2019, <<https://www.rfc-editor.org/info/rfc8664>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

## 11.2. Informative References

[RFC4655] Farrel, A., Vasseur, J.-P., and J. Ash, "A Path Computation Element (PCE)-Based Architecture", RFC 4655, DOI 10.17487/RFC4655, August 2006, <<https://www.rfc-editor.org/info/rfc4655>>.

#### Appendix A. Contributors

Dhruv Dhody

Huawei Technologies Divyashree Techno Park, Whitefield Bangalore,  
Karnataka 560066 India

Email: [dhruv.ietf@gmail.com](mailto:dhruv.ietf@gmail.com)

#### Authors' Addresses

Marina Fizgeer

Ribbon Communications

Hasivim 30,

Petah-Tikva

Israel

Email: [marina.fizgeer@rbbn.com](mailto:marina.fizgeer@rbbn.com)

Orly Bachar

Ribbon Communications

Hasivim 30,

Petah-Tikva

Israel

Email: [orly.bachar@rbbn.com](mailto:orly.bachar@rbbn.com)