

PIM Working Group
Internet Draft
Intended status: Standards Track
Expires: September 24, 2025

H. Zhao
Ericsson
X. Liu
Alef Edge
Y. Liu
China Mobile
M. Sivakumar
Juniper
A. Peter
Individual

March 25, 2025

IGMP and MLD Snooping Yang Module Extension for L2VPN
draft-ietf-pim-igmp-mld-snooping-yang-l2vpn-ext-06

Abstract

Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping could be used in both bridge service and L2VPN service. The old ietf-igmp-mld-snooping yang module just describes the bridge service. In this document we extend the existing ietf-igmp-mld-snooping yang module and make it could be used in L2VPN service.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/lid-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>

This Internet-Draft will expire on September 24, 2025.

Internet Draft

Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction.....	3
1.1. Terminology.....	3
1.2. Tree Diagrams.....	3
1.3. Prefixes in Data Node Names.....	4
2. Design of Data Model.....	4
3. Module Structure.....	5
3.1. Mrouter interface for L2VPN.....	5
3.2. Outgoing interface for L2VPN.....	5
3.3. Using IGMP and MLD Snooping Instances in L2VPN service....	6
4. IGMP and MLD Snooping Yang Module Extension.....	7
5. Security Considerations.....	12
6. IANA Considerations.....	14
6.1. XML Registry.....	14
6.2. YANG Module Names Registry.....	14
7. References.....	14
7.1. Normative References.....	14
7.2. Informative References.....	16
Appendix A. Data Tree Example.....	17
L2VPN service.....	17
Authors' Addresses.....	21

Internet Draft

1. Introduction

The Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping [RFC4541] could be used in both bridge and L2VPN. This document extends the existing ietf-igmp-mld-snooping yang module and introduces l2vpn as a new l2-service-type [RFC9166]. The YANG module in this document conforms to the Network Management Datastore Architecture defined in [RFC8342].

1.1. Terminology

The terminology for describing YANG data models is found in [RFC6020] and [RFC7950], including:

- * augment
- * data model
- * data node
- * identity
- * module

The following terminologies are used in this document:

* mrouter: The multicast router, which is a router that has multicast routing enabled [RFC4286].

* mrouter interface: The snooping switch ports where multicast routers are attached [RFC4541]. Either Attachment Circuit (AC) or Pseudo Wire (PW) could be mrouter interface in L2VPN.

The following abbreviations are used in this document and defined model:

IGMP: Internet Group Management Protocol [RFC3376].

MLD: Multicast Listener Discovery [RFC3810].

AC: Attachment Circuit [RFC3916].

PW: Pseudo Wire [RFC3916].

1.2. Tree Diagrams

Tree diagrams used in this document follow the notation defined in [RFC8340].

1.3. Prefixes in Data Node Names

In this document, names of data nodes, actions, and other data model objects are often used without a prefix, as long as it is clear from the context in which YANG module each name is defined. Otherwise, names are prefixed using the standard prefix associated with the corresponding YANG module, as shown in Table 1.

Prefix	YANG module	Reference
if	ietf-interfaces	[RFC8343]
rt	ietf-routing	[RFC8349]
ni	ietf-network-instance	[RFC8529]
ims	ietf-igmp-mld-snooping	[RFC9166]
pw	ietf-pseudowires	[draft-ietf-bess-l2vpn-yang]
l2vpn	ietf-l2vpn	[draft-ietf-bess-l2vpn-yang]

Table 1: Prefixes and Corresponding YANG Modules

2. Design of Data Model

Besides bridge, IGMP & MLD snooping also provides a way to constrain multicast traffic for L2VPN. By monitoring the IGMP & MLD membership reports sent by hosts within the L2VPN domain, IGMP & MLD snooping can set up Layer 2 multicast forwarding tables to deliver traffic only to ports with at least one interested member within the L2VPN domain. Thereby significantly reduce the volume of multicast traffic that would otherwise flood an entire L2VPN domain. The IGMP & MLD snooping operation applies to both access circuits and pseudowires within a L2VPN domain. A network-instance [RFC8529] whose type is vpls-instance-type [draft-ietf-bess-l2vpn-yang] could be treated as a L2VPN domain.

The YANG module in this document includes all the common building blocks for IGMP & MLD snooping used in L2VPN. It defines a new L2 service type which is L2VPN [draft-ietf-bess-l2vpn-yang]. When value of l2-service-type is l2vpn, the IGMP & MLD Snooping instance will be used in the L2VPN service. One instance corresponds to one L2VPN [draft-ietf-bess-l2vpn-yang] instance. It also defines mrouter interface and outgoing interface including statically configured and dynamically learned.

Internet Draft

3. Module Structure

This module augments ietf-igmp-mld-snooping data model specified in [RFC9166]. It adds mrouter interface, outgoing AC and outgoing PW which could be used in both igmp-snooping-instance and mld-snooping-instance.

This module also defines how to use the igmp-snooping-instance and mld-snooping-instance in L2VPN service.

This module conforms to the Network Management Datastore Architecture (NMDA) [RFC8342]. The operational state data is combined with the associated configuration data in the same hierarchy [RFC8407].

3.1. Mrouter interface for L2VPN

This module augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:igmp-snooping-instance to add mrouter interface for L2VPN in IGMP Snooping.

The static-l2vpn-mrouter-interface-ac and static-l2vpn-mrouter-interface-pw represent mrouter interfaces which are manually configured.

The l2vpn-mrouter-interface-ac and l2vpn-mrouter-interface-pw represent mrouter interfaces learned by the snooping device dynamically.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:igmp-snooping-instance:
  +--rw static-l2vpn-mrouter-interface-ac*   if:interface-ref
  +--rw static-l2vpn-mrouter-interface-pw*   pw:pseudowire-ref
  +--ro l2vpn-mrouter-interface-ac*          if:interface-ref
  +--ro l2vpn-mrouter-interface-pw*          pw:pseudowire-ref
```

Similarly this module also augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:mld-snooping-instance to add mrouter interface for L2VPN in MLD Snooping.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:mld-snooping-instance:
  +--rw static-l2vpn-mrouter-interface-ac*   if:interface-ref
  +--rw static-l2vpn-mrouter-interface-pw*   pw:pseudowire-ref
  +--ro l2vpn-mrouter-interface-ac*          if:interface-ref
  +--ro l2vpn-mrouter-interface-pw*          pw:pseudowire-ref
```

3.2. Outgoing interface for L2VPN

IGMP & MLD snooping can set up Layer 2 multicast forwarding tables to deliver multicast traffic, so each packet should have at least one corresponding outgoing interface. The outgoing interfaces might be Attachment Circuit (AC) or Pseudo Wire (PW) in L2VPN. They could be manually configured or dynamically learned by the snooping device.

Internet Draft

This module augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:igmp-snooping-instance/ims:static-l2-multicast-group to add l2vpn-outgoing-ac and l2vpn-outgoing-pw for L2VPN in IGMP Snooping. They should be configured manually.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:igmp-snooping-instance
  /ims:static-l2-multicast-group:
  +--rw l2vpn-outgoing-ac*   if:interface-ref
  +--rw l2vpn-outgoing-pw*   pw:pseudowire-ref
```

Similarly it also augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:mld-snooping-instance/ims:static-l2-multicast-group to add l2vpn-outgoing-ac and l2vpn-outgoing-pw for L2VPN in MLD Snooping. They should be configured manually.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:mld-snooping-instance
  /ims:static-l2-multicast-group:
  +--rw l2vpn-outgoing-ac*   if:interface-ref
  +--rw l2vpn-outgoing-pw*   pw:pseudowire-ref
```

This module augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:igmp-snooping-instance/ims:group/ims:source to add l2vpn-outgoing-ac and l2vpn-outgoing-pw for L2VPN in IGMP Snooping. They are read only and should be filled dynamically.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:igmp-snooping-instance
  /ims:group/ims:source:
  +--ro l2vpn-outgoing-ac*   if:interface-ref
  +--ro l2vpn-outgoing-pw*   pw:pseudowire-ref
```

Similarly it also augments /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol/ims:mld-snooping-instance/ims:group/ims:source to add l2vpn-outgoing-ac and l2vpn-outgoing-pw for L2VPN in MLD Snooping. They are read only and should be filled dynamically.

```
augment /rt:routing/rt:control-plane-protocols
  /rt:control-plane-protocol/ims:mld-snooping-instance
  /ims:group/ims:source:
  +--ro l2vpn-outgoing-ac*   if:interface-ref
  +--ro l2vpn-outgoing-pw*   pw:pseudowire-ref
```

3.3. Using IGMP and MLD Snooping Instances in L2VPN service

This module augments /ni:network-instances/ni:network-instance/ni:ni-type/l2vpn:l2vpn [draft-ietf-bess-l2vpn-yang] to use igmp-snooping-

Internet Draft

instance. It means IGMP Snooping is enabled in the specified L2VPN instance.

```
augment /ni:network-instances/ni:network-instance/ni:ni-type
  /l2vpn:l2vpn:
  +--rw igmp-snooping-instance?
  |   ims:igmp-mld-snooping-instance-ref
  +--rw mld-snooping-instance?
  |   ims:igmp-mld-snooping-instance-ref
```

The mld-snooping-instance could be used in concurrence with igmp-snooping-instance to configure the MLD Snooping.

4. IGMP and MLD Snooping Yang Module Extension

This module references [RFC1112],[RFC2236],[RFC2710],[RFC3376],[RFC3810],[RFC4541],[RFC5790],[RFC6991],[RFC7761],[RFC8343],[RFC8529],[RFC9166] and [draft-ietf-bess-l2vpn-yang].

```
<CODE BEGINS> file ietf-igmp-mld-snooping-l2vpn@2022-10-11.yang
module ietf-igmp-mld-snooping-l2vpn {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-igmp-mld-snooping-l2vpn";

  prefix l2vpn-ims;

  import ietf-interfaces {
    prefix "if";
    reference
      "RFC 8343: A YANG Data Model for Interface Management";
  }

  import ietf-routing {
    prefix "rt";
    reference
      "RFC 8349: A YANG Data Model for Routing Management (NMDA
      Version)";
  }

  import ietf-network-instance {
    prefix "ni";
    reference
      "RFC 8529: YANG Data Model for Network Instances";
  }

  import ietf-igmp-mld-snooping {
    prefix "ims";
    reference
      "RFC 9166: A YANG Data Model for Internet Group Management
      Protocol (IGMP) and
      Multicast Listener Discovery (MLD) Snooping";
```

Internet Draft

```
}

import ietf-l2vpn {
    prefix "l2vpn";
    reference
        "draft-ietf-bess-l2vpn-yang: YANG Data Model for MPLS-based
L2VPN";
}

import ietf-pseudowires {
    prefix "pw";
    reference
        "draft-ietf-bess-l2vpn-yang: YANG Data Model for MPLS-based
L2VPN";
}

organization
    "IETF PIM Working Group";

contact
    "WG Web:    <http://datatracker.ietf.org/wg/pim/>
    WG List:    <mailto:pim@ietf.org>

    Editors:    Hongji Zhao
                 <mailto:hongji.zhao@ericsson.com>

                 Xufeng Liu
                 <mailto:xufeng.liu.ietf@gmail.com>

                 Yisong Liu
                 <mailto:liuyisong@chinamobile.com>

                 Anish Peter
                 <mailto:anish.ietf@gmail.com>

                 Mahesh Sivakumar
                 <mailto:sivakumar.mahesh@gmail.com>

    ";
```

description

"The module contains a collection of YANG definitions of
IGMP & MLD Snooping in L2VPN service.

Copyright (c) 2022 IETF Trust and the persons identified as
authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or
without modification, is permitted pursuant to, and subject to
the license terms contained in, the Simplified BSD License set
forth in Section 4.c of the IETF Trust's Legal Provisions
Relating to IETF Documents

Internet Draft

(<http://trustee.ietf.org/license-info>).

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices."

```
revision 2022-10-11 {
  description
    "Initial revision.";
  reference
    "RFC XXXX: IGMP and MLD Snooping Yang Module Extension
    in L2VPN service";
}

/* identities */

identity l2vpn {
  base ims:l2-service-type;
  description
    "This identity represents L2VPN service.";
}

/*
 * Groupings
 */

grouping static-l2vpn-mrouter-interface-ac-pw {
  description
    "The static mrouter interface in L2VPN service.";

  leaf-list static-l2vpn-mrouter-interface-ac {
    when 'derived-from-or-self(..l2-service-type,"ims:l2vpn")';
    type if:interface-ref;
    description
      "The static mrouter interface whose type is interface
      in L2VPN service.";
  }

  leaf-list static-l2vpn-mrouter-interface-pw {
    when 'derived-from-or-self(..l2-service-type,"ims:l2vpn")';
    type pw:pseudowire-ref;
    description
      "The static mrouter interface whose type is PW
      in L2VPN service.";
  }
}

grouping dynamic-l2vpn-mrouter-interface-ac-pw {
  description
    "The dynamic mrouter interface in L2VPN service.";

  leaf-list l2vpn-mrouter-interface-ac {
```

Internet Draft

```
when 'derived-from-or-self(..../l2-service-type,"ims:l2vpn")';
type if:interface-ref;
config false;
description
    "The mrouter interface whose type is interface in L2VPN
    service. When switch receives IGMP/MLD queries from
    multicast router on an interface, this interface will
    become mrouter interface for IGMP/MLD snooping.";
}

leaf-list l2vpn-mrouter-interface-pw {
    when 'derived-from-or-self(..../l2-service-type,"ims:l2vpn")';
    type pw:pseudowire-ref;
    config false;
    description
        "The mrouter interface whose type is PW in L2VPN service.
        When switch receives IGMP/MLD queries from multicast router
        on a PW, this PW will become mrouter interface for IGMP/MLD
        snooping.";
}
}

grouping l2vpn-outgoing-ac-pw {
    description
        "Outgoing Attachment Circuit (AC) or Pseudo Wire (PW) in L2VPN.";

    leaf-list l2vpn-outgoing-ac {
        when 'derived-from-or-self(..../..../l2-service-type,"ims:l2vpn")';
        type if:interface-ref;
        description "Outgoing Attachment Circuit (AC) in L2VPN";
    }

    leaf-list l2vpn-outgoing-pw {
        when 'derived-from-or-self(..../..../l2-service-type,"ims:l2vpn")';
        type pw:pseudowire-ref;
        description "Outgoing Pseudo Wire (PW) in L2VPN";
    }
}

/*
 * The mrouter interface in L2VPN service.
 */

augment "/rt:routing/rt:control-plane-protocols"+
    "/rt:control-plane-protocol/ims:igmp-snooping-instance" {

    description
        "The mrouter interface in L2VPN service for IGMP Snooping.";

    uses static-l2vpn-mrouter-interface-ac-pw;

    uses dynamic-l2vpn-mrouter-interface-ac-pw;
```

```
}

augment "/rt:routing/rt:control-plane-protocols"+
  "/rt:control-plane-protocol/ims:mld-snooping-instance" {
  description
    "The mrouter interface in L2VPN service for MLD Snooping.";

  uses static-l2vpn-mrouter-interface-ac-pw;

  uses dynamic-l2vpn-mrouter-interface-ac-pw;
}

/*
 * Static Outgoing AC or PW in L2VPN service
 */

augment "/rt:routing/rt:control-plane-protocols"+
  "/rt:control-plane-protocol"+
  "/ims:igmp-snooping-instance/ims:static-l2-multicast-group" {

  description
    "Static Outgoing AC or PW in L2VPN service for IGMP snooping.";

  uses l2vpn-outgoing-ac-pw;
}

augment "/rt:routing/rt:control-plane-protocols"+
  "/rt:control-plane-protocol"+
  "/ims:mld-snooping-instance/ims:static-l2-multicast-group" {

  description
    "Static Outgoing AC or PW in L2VPN service for MLD snooping.";

  uses l2vpn-outgoing-ac-pw;
}

/*
 * Dynamic Outgoing AC or PW in L2VPN service
 */

augment "/rt:routing/rt:control-plane-protocols"+
  "/rt:control-plane-protocol"+
  "/ims:igmp-snooping-instance/ims:group/ims:source" {

  description
    "Dynamic Outgoing AC or PW in L2VPN service for IGMP snooping.";

  uses l2vpn-outgoing-ac-pw;
```

Internet Draft

```

}

augment "/rt:routing/rt:control-plane-protocols"+
  "/rt:control-plane-protocol"+
  "/ims:mld-snooping-instance/ims:group/ims:source" {

  description
    "Dynamic Outgoing AC or PW in L2VPN service for MLD snooping.";

  uses l2vpn-outgoing-ac-pw;

}

/*
 * Use IGMP & MLD snooping instance in L2VPN
 */

augment "/ni:network-instances/ni:network-instance"+
  "/ni:ni-type/l2vpn:l2vpn" {

  description
    "Use IGMP & MLD snooping instance in L2VPN.";

  leaf igmp-snooping-instance {
    type ims:igmp-mld-snooping-instance-ref;
    description
      "Configure IGMP snooping instance in L2VPN.";
  }

  leaf mld-snooping-instance {
    type ims:igmp-mld-snooping-instance-ref;
    description
      "Configure MLD snooping instance in L2VPN.";
  }
}
}
<CODE ENDS>
```

5. Security Considerations

The YANG module specified in this document defines a schema for data that is designed to be accessed via network management protocols such as NETCONF [RFC6241] or RESTCONF [RFC8040]. The lowest NETCONF layer is the secure transport layer, and the mandatory-to-implement secure transport is Secure Shell (SSH) [RFC6242]. The lowest RESTCONF layer is HTTPS, and the mandatory-to-implement secure transport is TLS [RFC8446].

The Network Configuration Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

Internet Draft

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., config true, which is the default). These data nodes may be considered sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) to these data nodes without proper protection can have a negative effect on network operations. These are the subtrees and data nodes and their sensitivity/vulnerability, and they are all under /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol:/ims:igmp-snooping-instance or /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol:/ims:mld-snooping-instance :

/l2vpn-ims:static-l2vpn-mrouter-interface-ac

/l2vpn-ims:static-l2vpn-mrouter-interface-pw

/ims:static-l2-multicast-group/l2vpn-ims:l2vpn-outgoing-ac

/ims:static-l2-multicast-group/l2vpn-ims:l2vpn-outgoing-pw

The subtrees under /ni:network-instances/ni:network-instance/ni:ni-type/l2vpn:l2vpn

ims:igmp-snooping-instance

ims:mld-snooping-instance

Unauthorized access to any data node of these subtrees can adversely affect the IGMP & MLD Snooping subsystem of both the local device and the network. This may lead to network malfunctions, delivery of packets to inappropriate destinations, and other problems.

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. These are the subtrees and data nodes and their sensitivity/vulnerability, and they are all under /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol:/ims:igmp-snooping-instance or /rt:routing/rt:control-plane-protocols/rt:control-plane-protocol:/ims:mld-snooping-instance:

/l2vpn-ims:l2vpn-mrouter-interface-ac

/l2vpn-ims:l2vpn-mrouter-interface-pw

/ims:group/ims:source/l2vpn-ims:l2vpn-outgoing-ac

/ims:group/ims:source/l2vpn-ims:l2vpn-outgoing-pw

Unauthorized access to any data node of these subtrees can disclose the operational state information of IGMP & MLD Snooping on this device. The devices that use this YANG module should heed the Security Considerations in [RFC4541].

Internet Draft

6. IANA Considerations

RFC Ed.: In this section, replace all occurrences of 'XXXX' with the actual RFC number (and remove this note).

6.1. XML Registry

This document registers the following namespace URIs in the IETF XML registry [RFC3688]:

```
-----  
URI: urn:ietf:params:xml:ns:yang:ietf-igmp-mld-snooping-l2vpn  
Registrant Contact: The IETF.  
XML: N/A, the requested URI is an XML namespace.  
-----
```

6.2. YANG Module Names Registry

This document registers the following YANG modules in the YANG Module Names registry [RFC7950]:

```
-----  
name:      ietf-igmp-mld-snooping-l2vpn  
namespace: urn:ietf:params:xml:ns:yang:ietf-igmp-mld-snooping-l2vpn  
prefix:    l2vpn-ims  
reference: RFC XXXX  
-----
```

7. References

7.1. Normative References

- [RFC1112] Deering, S., "Host extensions for IP multicasting", STD 5, RFC 1112, August 1989.
- [RFC2236] W. Fenner, "Internet Group Management Protocol, Version 2", RFC 2236, November 1997.
- [RFC2710] Deering, S., Fenner, W., and B. Haberman, "Multicast Listener Discovery (MLD) for IPv6", RFC 2710, October 1999.
- [RFC3376] Cain, B., Deering, S., Kouvelas, I., Fenner, B., and A. Thyagarajan, "Internet Group Management Protocol, Version 3", RFC 3376, October 2002.
- [RFC3688] Mealling, M., "The IETF XML Registry", RFC 3688, January 2004.

Internet Draft

- [RFC3810] Vida, R. and L. Costa, "Multicast Listener Discovery Version 2 (MLDv2) for IPv6", RFC 3810, June 2004.
- [RFC4286] B. Haberman and J. Martin, "Multicast Router Discovery", RFC 4286, December 2005.
- [RFC4541] M. Christensen, K. Kimball, F. Solensky, "Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches", RFC 4541, May 2006.
- [RFC5790] H. Liu, W. Cao, H. Asaeda, "Lightweight Internet Group Management Protocol Version 3 (IGMPv3) and Multicast Listener Discovery Version 2 (MLDv2) Protocols", RFC 5790, February 2010.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, October 2010.
- [RFC6241] R. Enns, Ed., M. Bjorklund, Ed., J. Schoenwaelder, Ed., A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, June 2011.
- [RFC6242] Wasserman, M., "Using the NETCONF Protocol over Secure Shell (SSH)", RFC 6242, June 2011.
- [RFC6991] Schoenwaelder, J., Ed., "Common YANG Data Types", RFC 6991, July 2013.
- [RFC7761] B. Fenner, M. Handley, H. Holbrook, I. Kouvelas, R. Parekh, Z. Zhang, L. Zheng, "Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised)", RFC 7761, March 2016.
- [RFC7950] M. Bjorklund, Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, August 2016.
- [RFC8040] A. Bierman, M. Bjorklund, K. Watsen, "RESTCONF Protocol", RFC 8040, January 2017.
- [RFC8340] M. Bjorklund, and L. Berger, Ed., "YANG Tree Diagrams", RFC 8340, March 2018.
- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", RFC 8341, March 2018.
- [RFC8342] M. Bjorklund and J. Schoenwaelder, "Network Management Datastore Architecture (NMDA)", RFC 8342, March 2018.
- [RFC8343] M. Bjorklund, "A YANG Data Model for Interface Management", RFC 8343, March 2018.

Internet Draft

- [RFC8349] L. Lhotka, A. Lindem, Y. Qu, "A YANG Data Model for Routing Management (NMDA Version)", RFC 8349, March 2018.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, August 2018.
- [RFC8529] L. Berger, C. Hopps, A. Lindem, D. Bogdanovic, X. Liu, "YANG Data Model for Network Instances", RFC 8529, March 2019.
- [RFC9166] H. Zhao, X. Liu, Y. Liu, A. Peter, M. Sivakumar, "A YANG Data Model for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping", RFC 9166, February 2022.
- [draft-ietf-bess-l2vpn-yang] Shah, H., Brissette, P., Chen, I., Hussain, I., Wen, B., and K. Tiruveedhula, "YANG Data Model for MPLS-based L2VPN", draft-ietf-bess-l2vpn-yang-10 (work in progress), July 2019.

7.2. Informative References


- [RFC3916] X. Xiao, Ed., D. McPherson, Ed., P. Pate, Ed., "Requirements for Pseudo-Wire Emulation Edge-to-Edge (PWE3)", RFC 3916, September 2004.
- [RFC7951] L. Lhotka, "JSON Encoding of Data Modeled with YANG", RFC 7951, August 2016.
- [RFC8407] A. Bierman, "Guidelines for Authors and Reviewers of Documents Containing YANG Data Models", RFC 8407, October 2018.

Internet Draft

Appendix A. Data Tree Example

L2VPN service

This section contains an example for L2VPN service in the JSON encoding [RFC7951], containing both configuration and state data.

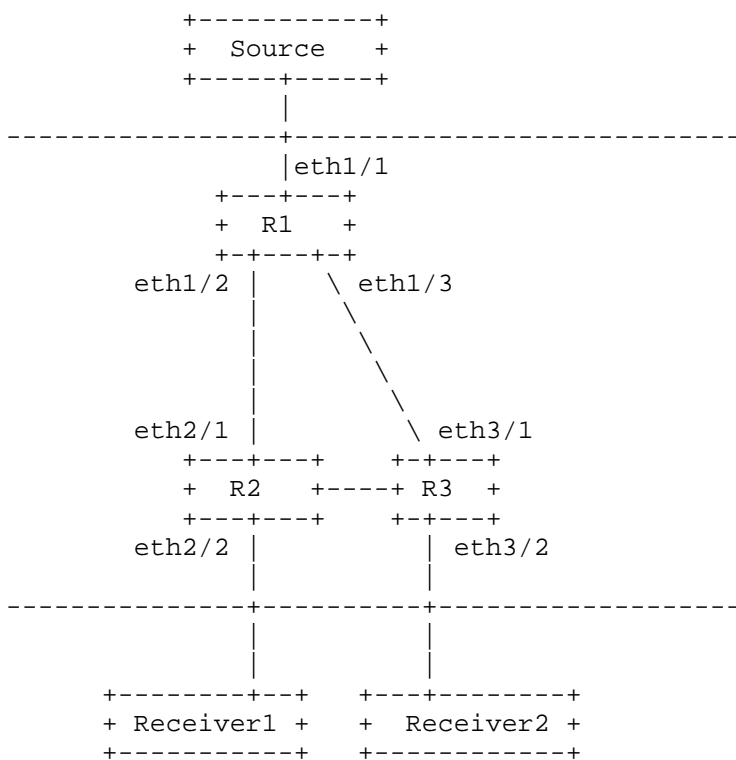

The configuration data for R1 in the above figure could be as follows:

```
{
  "ietf-interfaces:interfaces": {
    "interface": [
      {
        "name": "eth1/1",
        "type": "iana-if-type:ethernetCsmacd"
      }
    ]
  },
  "ietf-pseudowires:pseudowires": {
    "pseudowire": [
      {
        "name": "pw2"
      }
    ]
  }
}
```

Internet Draft

```
{
  "name": "pw3"
}
],
},
"ietf-network-instance:network-instances": {
  "network-instance": [
    {
      "name": "vpls1",
      "ietf-igmp-mld-snooping:igmp-snooping-instance": "vis1",
      "ietf-l2vpn:type": "ietf-l2vpn:vpls-instance-type",
      "ietf-l2vpn:signaling-type": "ietf-l2vpn:ldp-signaling",
      "ietf-l2vpn:endpoint": [
        {
          "name": "acs",
          "ac": [
            {
              "name": "eth1/1"
            }
          ]
        },
      ],
    },
    {
      "name": "pws",
      "pw": [
        {
          "name": "pw2"
        },
        {
          "name": "pw3"
        }
      ]
    }
  ]
}
],
},
"ietf-routing:routing": {
  "control-plane-protocols": {
    "control-plane-protocol": [
      {
        "type": "ietf-igmp-mld-snooping:igmp-snooping",
        "name": "vis1",
        "ietf-igmp-mld-snooping:igmp-snooping-instance": {
          "l2-service-type": "l2vpn-ims:l2vpn",
          "enable": true
        }
      }
    ]
  }
}
}
```

Internet Draft

The corresponding operational state data for R1 could be as follows:

```
{
  "ietf-interfaces:interfaces":{
    "interface":[
      {
        "name":"eth1/1",
        "type":"iana-if-type:ethernetCsmacd",
        "oper-status": "up",
        "statistics": {
          "discontinuity-time": "2018-05-23T12:34:56-05:00"
        }
      }
    ]
  },
  "ietf-pseudowires:pseudowires": {
    "pseudowire": [
      {
        "name": "pw2"
      },
      {
        "name": "pw3"
      }
    ]
  },
  "ietf-network-instance:network-instances": {
    "network-instance": [
      {
        "name": "vpls1",
        "ietf-igmp-mld-snooping:igmp-snooping-instance": "vis1",
        "ietf-l2vpn:type": "ietf-l2vpn:vpls-instance-type",
        "ietf-l2vpn:signaling-type": "ietf-l2vpn:ldp-signaling",
        "ietf-l2vpn:endpoint": [
          {
            "name": "acs",
            "ac": [
              {
                "name": "eth1/1"
              }
            ]
          }
        ],
      },
      {
        "name": "pws",
        "pw": [
          {
            "name": "pw2"
          },
          {
            "name": "pw3"
          }
        ]
      }
    ]
  }
}
```

Internet Draft

```
    ]
  }
]
}
],
"ietf-routing:routing": {
  "control-plane-protocols": {
    "control-plane-protocol": [
      {
        "type": "ietf-igmp-mld-snooping:igmp-snooping",
        "name": "vis1",
        "ietf-igmp-mld-snooping:igmp-snooping-instance": {
          "l2-service-type": "l2vpn-ims:l2vpn",
          "enable": true
        }
      }
    ]
  }
}
}
```

Internet Draft

Authors' Addresses

Hongji Zhao
Ericsson (China) Communications Company Ltd.
Ericsson Tower, No. 5 Lize East Street,
Chaoyang District Beijing 100102, China

Email: hongji.zhao@ericsson.com

Xufeng Liu
Alef Edge
United States of America

EMail: xufeng.liu.ietf@gmail.com

Yisong Liu
China Mobile
China

Email: liuyisong@chinamobile.com

Anish Peter
Individual

EMail: anish.ietf@gmail.com

Mahesh Sivakumar
Juniper Networks
1133 Innovation Way
Sunnyvale, California
USA

EMail: sivakumar.mahesh@gmail.com