

Network Working Group
Internet-Draft
Intended status: Informational
Expires: 4 September 2025

N. Matsuhira
Neptela
3 March 2025

Outer Header Translator
draft-matsuhira-oht-03

Abstract

Network address translation technology has a convenient aspect, however, it has the side effect of breaking end-to-end transparency. This document proposes a technology that achieves both network address translation and end-to-end transparency. This technology may provide solutions for mobility, migration, multihoming, policy routing, etc.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 4 September 2025.

Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	2
2. Concept of Architecture	3
3. Terminology	4
4. Network Configuration	4
5. OHT Processing	4
5.1. Support IP protocol versions	5
5.2. Encapsulation / Decapsulation	5
5.3. OHT Table	5
5.4. Address Type	6
6. Possible Solutions	7
7. IANA Considerations	7
8. Security Considerations	7
9. Acknowledgements	7
10. References	7
10.1. Normative References	7
10.2. Informative References	8
Author's Address	8

1. Introduction

NAT [RFC1631] was devised as a short-term solution to the exhaustion of IPv4 addresses, and is placed at the boundary between a private network (Intranet) built using private addresses [RFC1597] and the Internet. Communication closed to the intranet is made possible by using private addresses. A global address is required only for hosts communicating with the Internet, and this is achieved by NAT performing address translation. This technology supported the expansion of the Intranets and the Internet.

After that, technology was developed that allows multiple hosts to share a single global IPv4 address. This technology is called NAPT (Network Address Port Translation). This technology was primarily used in SOHO (small office/home office) networks and supported the expansion of SOHO networks and the Internet.

On the other hand, 8+8/GSE [I-D.ietf-ipngwg-gseaddr] was proposed in the early stages of the IPv6 discussion. This proposal involves translating the prefix part of the IPv6 address. Therefore, it has the side effects of NAT. As a result, there was a lot of discussion. Note that this has nothing to do with IPv4 address exhaustion.

Furthermore, as for the transition technology from IPv4 to IPv6, technologies that involve address translation such as NAT-PT [RFC2766] were considered, but this is also a technology similar to NAT and has a lot of discussion.

Internet Transparency is summarized in RFC2775 [RFC2775].

2. Concept of Architecture

End-to-end transparency can be maintained by encapsulating packets generated by the host and subjecting only the encapsulated outer IP header to address translation. That is, internal packets must not be translation.

Figure 1 shows encapsulation. IP Encapsulation within IP is described in RFC2003 [RFC2003].

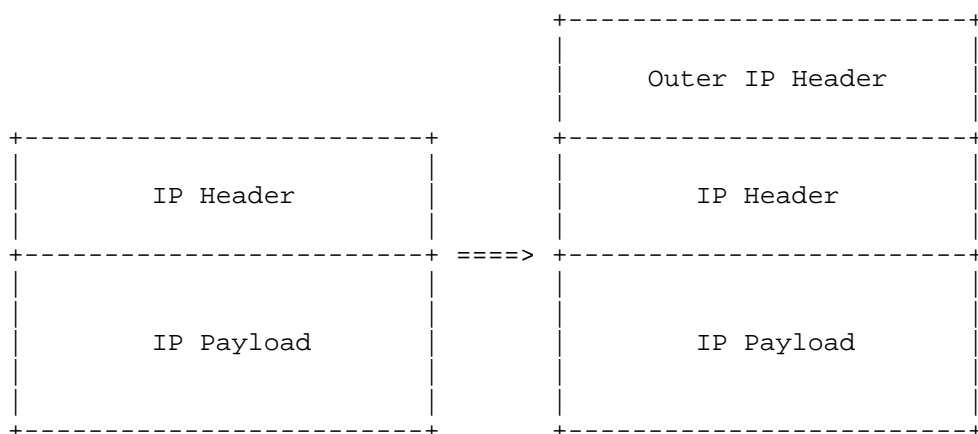


Figure 1

Typically, the destination IP address in the outer header is the address of the tunnel endpoint. However, in this concept, the outer header is a copy of the inner header. If the outer header is not translated, the outer header remains the same as the internal header. After encapsulation, the outer header of the packet is subject to translate.

3. Terminology

This section defines terminologies.

Outer Header Translator

Refers to the device or processing module that performs this processing.

Outer Header Translation

Show the method.

Outer Header Translation Table

Outer Header Translation Table

Outer Header Translation Relay

Indicates communication via one or more Outer Header Translators

Outer Header Translation Domain

Indicates a domain using OHT.

4. Network Configuration

This section describes network configuration with OHT.

Figure 2 shows sample network configuration with OHT.

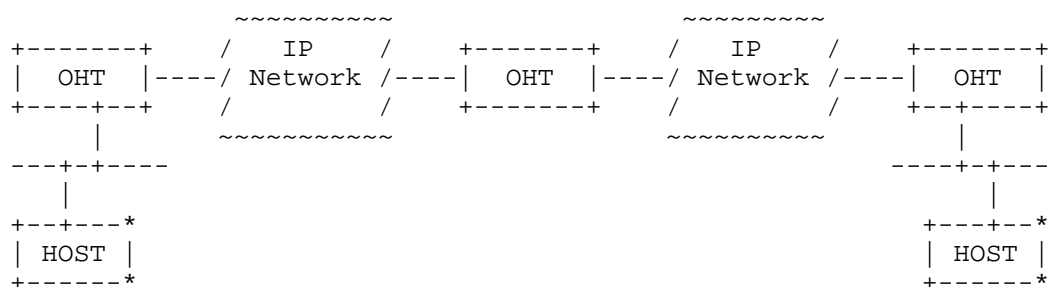


Figure 2

Typically, OHT is implemented in a router. Encapsulation and decoupling are also implemented in routers. However, other implementations are possible. For example, encapsulation and decapsulation may be implemented in the host.

5. OHT Processing

5.1. Support IP protocol versions

Figure 3 shows possible IP protocol versions, i.e. IPv4 [RFC791] and IPv6 [RFC8200] combinations.

Outer IP Header Version	Inner IP Protocol Version
IPv6	IPv6
	IPv4
IPv4	IPv6
	IPv4

Figure 3

There are four combinations, and dealing with all of them would be complicated. Therefore, it would be good if the Outer IP Header could be limited to IPv6 only.

5.2. Encapsulation / Decapsulation

In this concept, the outer header is a copy of the inner header.

In this concept, the outer header is essentially a copy of the inner header. According to this, the possible combinations of IP protocol versions are IPv6 over IPv6 and IPv4 over IPv4. If it is assumed that it will be applied to an IPv6 only backbone, accommodation of IPv4 will be possible with IPv6 over IPv6 over IPv4. In this case, the IPv6 Addresses with Embedded IPv4 Addresses can be used as the IPv6 address in the internal IPv6 header.

If support for IPv4 private addresses, M46A [I-D.matsuhira-m46a] might be useful.

5.3. OHT Table

Figure 4 shows the structure of OHT table.

Inner Src IP addr	Inner Src IP mask	Inner dst IP addr	Inner dst IP mask	Inner Next Hdr	Inner src port	Inner dst port	Outer Src IP addr	Next Outer Src IP addr	Next Outer Dst IP addr
:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:

Figure 4

The table may contain Traffic Class and Flow Label.

5.4. Address Type

Figure 5 shows possible address type [RFC4291] combinations for outer header destination addresses and inner header destination addresses are shown.

outer header			unicast address Global	anycast address	multicast Address
inner header destination	unicast address	Global	o	o	?
		Embedded IPv4	o	o	?
		Link-Local	x	x	x
		Unique Local	o	o	?
	anycast address		o	o	?
	multicast address		o	o	o

Figure 5

6. Possible Solutions

OHT provides solutions for mobility, migration, multi-homing, policy routing, service function chaining, etc. More details will be provided in the future versions.

7. IANA Considerations

This document makes no request of IANA.

Note to RFC Editor: this section may be removed on publication as an RFC.

8. Security Considerations

IPsec for internal packets works because internal packets are forwarded unchanged.

9. Acknowledgements

It may be listed in the future.

10. References

10.1. Normative References

- [I-D.matsuhira-m46a]
Matsuhira, N., "Multiple IPv4 - IPv6 mapped IPv6 address (M46A)", Work in Progress, Internet-Draft, draft-matsuhira-m46a-17, 6 October 2024, <<https://datatracker.ietf.org/doc/html/draft-matsuhira-m46a-17>>.
- [RFC2003] Perkins, C., "IP Encapsulation within IP", RFC 2003, DOI 10.17487/RFC2003, October 1996, <<https://www.rfc-editor.org/info/rfc2003>>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", RFC 4291, DOI 10.17487/RFC4291, February 2006, <<https://www.rfc-editor.org/info/rfc4291>>.

- [RFC791] Postel, J., "Internet Protocol", STD 5, RFC 791, DOI 10.17487/RFC0791, September 1981, <<https://www.rfc-editor.org/info/rfc791>>.
- [RFC8200] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", STD 86, RFC 8200, DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.

10.2. Informative References

- [I-D.ietf-ipngwg-gseaddr]
O'Dell, M. D., "GSE - An Alternate Addressing Architecture for IPv6", Work in Progress, Internet-Draft, draft-ietf-ipngwg-gseaddr-00, 24 February 1997, <<https://datatracker.ietf.org/doc/html/draft-ietf-ipngwg-gseaddr-00>>.
- [RFC1597] Rekhter, Y., Moskowitz, B., Karrenberg, D., and G. de Groot, "Address Allocation for Private Internets", RFC 1597, DOI 10.17487/RFC1597, March 1994, <<https://www.rfc-editor.org/info/rfc1597>>.
- [RFC1631] Egevang, K. and P. Francis, "The IP Network Address Translator (NAT)", RFC 1631, DOI 10.17487/RFC1631, May 1994, <<https://www.rfc-editor.org/info/rfc1631>>.
- [RFC2766] Tsirtsis, G. and P. Srisuresh, "Network Address Translation - Protocol Translation (NAT-PT)", RFC 2766, DOI 10.17487/RFC2766, February 2000, <<https://www.rfc-editor.org/info/rfc2766>>.
- [RFC2775] Carpenter, B., "Internet Transparency", RFC 2775, DOI 10.17487/RFC2775, February 2000, <<https://www.rfc-editor.org/info/rfc2775>>.

Author's Address

Naoki Matsuhira
Neptela
Japan
Email: matsuhira.ietf@gmail.com