

Network Working Group  
Internet-Draft  
Intended status: Informational  
Expires: 25 December 2025

M. McBride  
Futurewei  
Y. Liu  
China Mobile  
Z. Li  
Huawei Technologies  
M. Durmus  
E. Erdogan  
Turkcell  
G. Mishra  
Verizon Inc.  
23 June 2025

SRv6 Deployment Options  
draft-mcbride-srv6ops-srv6-deployment-02

Abstract

When deciding to migrate a network from MPLS/SR-MPLS to SRv6, common questions involve how to go about performing the migration, what's the least amount of impact to an existing network and what existing techniques are available. This document presents various migration options for networks being upgraded from MPLS/SR-MPLS to SRv6.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 25 December 2025.

Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	2
1.1. Requirements Language . . . . .	3
2. Glossary . . . . .	3
3. Progressive vs Direct Evolution . . . . .	3
4. Deployment Options . . . . .	5
4.1. Overlay . . . . .	5
4.2. Ships-In-The-Night . . . . .	6
4.3. Interworking between MPLS and SRv6 . . . . .	7
5. Considerations . . . . .	8
5.1. IPv6 Address Planning . . . . .	8
5.2. BGP in SRv6 . . . . .	9
5.3. VPN Service Design . . . . .	10
5.4. Migration steps . . . . .	10
6. IANA Considerations . . . . .	11
7. Security Considerations . . . . .	11
8. Acknowledgement . . . . .	11
9. References . . . . .	11
9.1. Normative References . . . . .	11
9.2. Informative References . . . . .	12
Authors' Addresses . . . . .	12

## 1. Introduction

Segment Routing IPv6 (SRv6) is a network architecture that leverages IPv6 data plane encapsulation to enable flexible and efficient traffic engineering. It allows for the creation of explicit paths through the network by encoding routing instructions directly into packet headers. Many operators are looking for direction in how to upgrade their existing networks to a SRv6 network. It is common for them to have had an IP/MPLS network for over ten years and now ready for a network refresh. Many are convinced it's time to evolve their network to segment routing. And now that SRv6 is mature, they are often planning on that deployment even if currently running SR-MPLS. How to evolve an existing IP/MPLS network to meet the new demands upon a network? Should they run ships in the night, utilize various tunneling/overlay techniques, use an interworking translation mechanism or other deployment solution? If they are currently

running an IP/MPLS network how should they transition to SRv6? This draft provides various deployment alternatives to help provide guidance to those wanting to upgrade their network to SRv6.

SRv6 can be deployed on a typical single-AS network (such as IP backbone network, metro network, mobile transport network, or data center network) or on an E2E network (such as an inter-AS VPN or carrier's carrier network). Before SRv6 is deployed, IPv6 address planning is needed for SID allocation. IGP and BGP designs are then implemented for network nodes, and the corresponding SIDs are advertised for services such as TE and VPN.

[I-D.liu-srv6ops-problem-summary] provides an overview of the common problems encountered during SRv6 deployment and operation. It provides a foundation for further work, including potential solutions and best practices to navigate deployment. The purpose of this deployment draft is to provide an overview of the various solutions available for SRv6 deployment particularly when migrating from MPLS/SR-MPLS to SRv6.

### 1.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in RFC 2119 [RFC2119].

## 2. Glossary

MPLS: Multiprotocol Label Switching

RSVP: Resource Reservation Protocol

SR-MPLS: Segment Routing based on MPLS

SRv6: Segment Routing based on IPv6

SRMS: Segment Routing Mapping Server

SIN: Ships-in-the-Night

## 3. Progressive vs Direct Evolution

Migrating from a traditional MPLS network to SRv6 is a significant architectural shift. A phased, progressive approach would involve first transitioning to SR-MPLS (Segment Routing over MPLS) before moving to SRv6. Doing so may reduce risks, simplify operations, and ensure a smooth migration. In most deployments, an MPLS to SR-MPLS transition would be a fairly minor upgrade. SR-MPLS reuses the MPLS

data plane (labels) while also simplifying the control plane (removing LDP/RSVP-TE). Existing MPLS supporting hardware will often support SR-MPLS with a software upgrade so there would be no need to upgrade hardware or change existing label forwarding mechanisms. Additionally, SRv6 requires at least a partial IPv6 infrastructure. Full network SRv6 adoption requires IPv6-enabled hardware and software across the network. Also, some legacy devices may not support SRv6 and the network may require new hardware. Some older routers may lack the TCAM capacity for 128-bit SIDs.

In some environments it may be best to instead skip SR-MPLS and transition directly to SRv6. If a network is already IPv6-ready (e.g., in data centers, 5G mobile backhaul) it may make sense to move directly to SRv6 and leverage an overlay solution for portions of the network not yet ready for an upgrade. If the network is currently IPv4 only but is expecting to be upgraded to IPv6 soon, it may make sense to directly transition an IPv4 MPLS network to SRv6 after the IPv6 deployment. If you have greenfield deployments, where SRv6 is natively supported, it would make sense to directly upgrade to SRv6. If the network support team is already experienced with IPv6 and SRv6 then it may make sense for a direct evolution from MPLS to SRv6.

Within those two philosophies, Progressive vs Direct evolution, we've identified three SRv6 transport network evolution strategies that operators can consider when transitioning from traditional MPLS networks or deploying new SRv6-based infrastructures. The first option is SRv6 Overlay (SRv6 over MPLS/IP) where SRv6 is deployed as an overlay on top of an existing MPLS transport network. The underlying network remains unchanged, and SRv6 tunnels are encapsulated over the infrastructure. The second option is Ships-in-the-Night (or Dual Stack: Independent SRv6 and MPLS). In this model, SRv6 and MPLS operate independently in the same network without interaction. And the third option is SRv6 and MPLS Interworking (Coexistence) which enables interworking between SRv6 and MPLS domains. Translation mechanisms (e.g., Segment Routing Mapping Server or SRMS) are used to map SRv6 SIDs between the two domains. We will detail each of these options in the following section.

The following diagram depicts the high level options of progressive vs direct evolution to SRv6. An existing MPLS network can first progressively migrate to SR-MPLS before migrating to SRv6 or it can migrate directly to SRv6 and bypass SR-MPLS deployment:

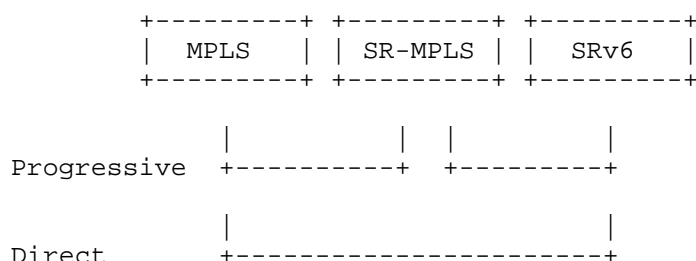


Figure 1: Progressive vs Direct

#### 4. Deployment Options

Various topics are addressed, in this section, to offer options for seamless transition to SRv6. Three SRv6 migration options are highlighted which will each enable a transition from current technologies, such as MPLS and SR-MPLS, and ensures an evolution path without the need for a complete forklift of existing infrastructure.

##### 4.1. Overlay

With an overlay model, one technology runs on top of the other. The underlying network provides transport, while the overlay provides services. With SRv6 over MPLS, SRv6 packets are encapsulated in MPLS (e.g., in a brownfield migration scenario). SRv6 is deployed as an overlay on top of an existing MPLS transport network. The underlying network remains unchanged, and SRv6 tunnels are encapsulated over the infrastructure. Overlays are useful for gradual migration, allowing operators to introduce SRv6 services without disrupting the existing MPLS/IP core and only minimal changes to the existing network. This allows early adoption of SRv6 features (e.g., network programming, service chaining). There is some overhead due to additional encapsulation (SRv6 headers over MPLS/IP) and it does not fully leverage native SRv6 capabilities in the data plane. It's a common migration technique because migration is fairly easy, it works with existing IPv4 MPLS networks, provides incremental deployment with only the services provider edge (PE) routers needing SRv6 upgrades. Core network routers can remain IPv4 MPLS (or SR-MPLS) while the rest of the network is transitioning to SRv6.

For instance, we could utilize a IPv6 provider edge (6PE) overlay if the backbone does not support IPv6. SRv6 services on transit nodes are forwarded through SRv6 over MPLS. 6PE is an MPLS-based overlay mechanism that allows IPv6 traffic to be transported over an IPv4/MPLS core network without requiring IPv6 support on core (P) routers. It leverages MP-BGP and MPLS label stacking to tunnel IPv6 packets across an existing IPv4/MPLS infrastructure. Edge routers connect

IPv6 islands and encapsulate IPv6 in MPLS. When it's challenging to provision dual stack on the core network, a 6PE (or L3VPN, L2VPN, etc) overlay could be used as a transition while retaining the capability to evolve to SRv6 in the future. BGP is used to advertise the SRv6 locator and loopback routes of the ingress and egress.

The following diagram depicts using 6PE as the MPLS overlay between SRv6 capable PE nodes:

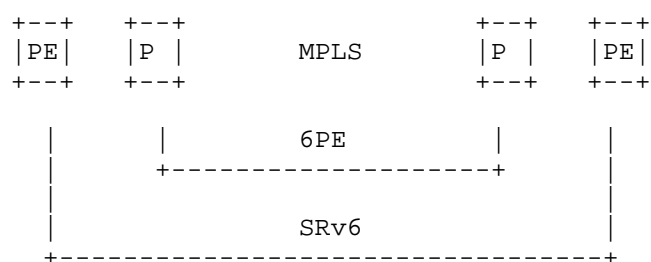


Figure 2: Overlay using 6PE

#### 4.2. Ships-In-The-Night

This solution is a straightforward and popular deployment option. Ships-in-the-Night is a technique that allows all routers to run multiple routing processes at once. SRv6 and MPLS operate independently in the same network without interaction. They coexist as separate "ships in the night," with no interworking between them. This technique is commonly used with IPv4 and IPv6 and can also be used with MPLS and SRv6. IPv4 and IPv6 are separate protocols and can't work together without some form of translation mechanism and same is true for MPLS and SRv6. As with MPLS and SRv6, networks run dual stack where both IPv4 and IPv6 run over the same infrastructure as ships-in-the-night.

Ships-in-the-Night is suitable for networks where SRv6 and MPLS serve different purposes (e.g., MPLS for existing VPNs, SRv6 for new services). Complete isolation, of the two control and data planes, avoids interoperability issues and provides flexibility to deploy SRv6 incrementally.

There are drawbacks to running protocols ships-in-the-night such as inefficient resource usage (parallel control planes and data planes) and no synergy between the two technologies. Some routers may struggle with simultaneous MPLS + SRv6. Managing two control planes increases overhead. Some operators prefer gradual migration (Overlay) rather than parallel operation. Maintaining two protocols

may introduce additional security vulnerabilities if not managed correctly. Dual-stack networks have an increased attack surface because of both IPv4 and IPv6 being maintained. This may also be true with MPLS and SRv6. The cost of maintaining both networks can be prohibitive as well. Managing and configuring two separate networks can be complex. Ships-in-the-night networks can consume more memory and processing power on networking devices.

The following diagram depicts using Ships-in-the-night SRv6 and MPLS over the same infrastructure:

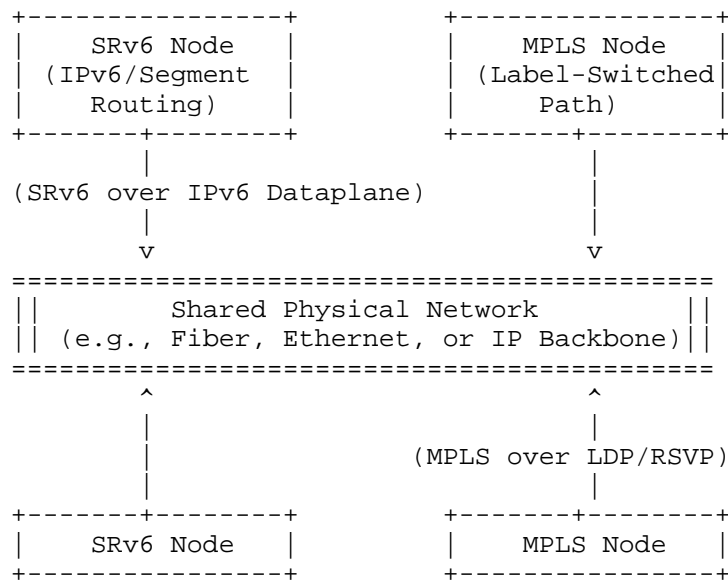


Figure 3: Ships-in-the-night

4.3. Interworking between MPLS and SRv6

Another migration strategy is to allow an existing MPLS network to interwork with SRv6, rather than only run ships-in-the-night or overlay. [I-D.ietf-spring-srv6-mpls-interworking] describes SRv6 and MPLS/SR-MPLS interworking procedures which can roughly be compared to translation solutions such as NAT or 464XLAT. This strategy enables interworking between SRv6 and MPLS domains. Translation mechanisms (e.g., Segment Routing Mapping Server or SRMS) are used to map SRv6 SIDs between the two domains. This option allows hybrid operation (e.g., SRv6 at the edge, MPLS in the core). Interworking requires additional control-plane mechanisms for SID translation and may add complexity in managing two different forwarding paradigms. New SRv6

behaviors, and MPLS labels, stitch the end to end path across different data planes. The interworking document assumes SR-MPLS-IPv4 for MPLS domains but the design equally works for SR-MPLS-IPv6, LDP-IPv4/IPv6 and RSVP-TE-MPLS label binding protocols. It provides transport interworking solutions such as SRv6 over MPLS (6oM) and MPLS over SRv6 (Mo6) along with service interworking solutions such as SRv6 to MPLS(6toM) and MPLS to SRv6 (Mto6).

Using a gateway is an Interworking (IW) example which supports both BGP SRv6 based L2/L3 services and BGP MPLS based L2/L3 services for a service instance. It terminates service encapsulation and performs L2/L3 destination lookup in a service instance:

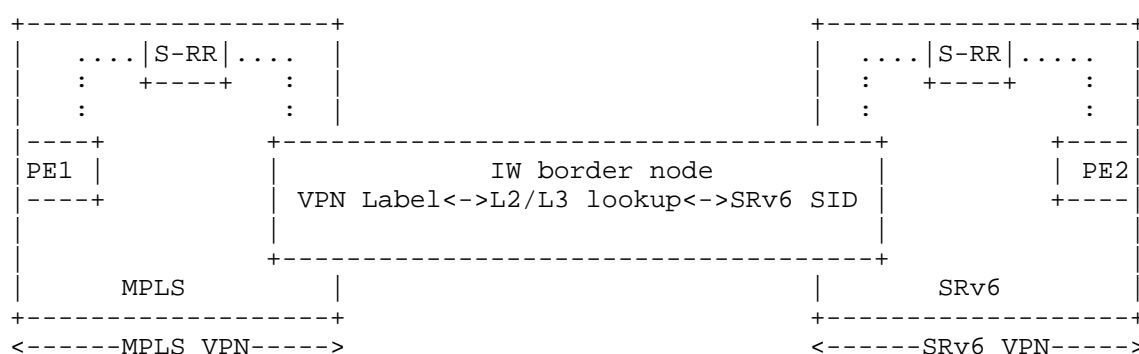


Figure 4: Gateway IW

## 5. Considerations

Here are a few additional considerations when migration from MPLS to SRv6.

### 5.1. IPv6 Address Planning

SRv6 requires a network running IPv6 and forwards packets based on native IPv6. Interface IPv6 addresses need to be configured prior to SRv6 configuration. IP address planning is an important part of network design and directly affects subsequent routing, tunnel, and security designs. Well-designed IP address planning makes service provisioning and network OAM much easier. When SRv6 needs to be deployed on a network, if IPv6 has been deployed and IPv6 addresses have been planned, the original IPv6 address planning does not need to be modified, and we only need to select a reserved network prefix and use it to allocate SRv6 locators. If neither IPv6 has been deployed on a network, nor IPv6 addresses have been planned, IPv6 address planning can be performed by determining the principles for IPv6



address planning on the network, determining the method of IPv6 address allocation, and hierarchically allocating IPv6 addresses.

During IPv6 address planning, for an E2E SRv6 network for instance, each network domain is configured with a network prefix for locator allocations to devices in this domain, allowing advertisement of only an aggregated locator route to devices outside the domain. If no IPv6 loopback interface has been configured on the network, the locator and loopback address with the same network prefix can be allocated so that only the aggregated route shared by the locator and loopback address needs to be advertised, thereby reducing the number of routes. A separate network prefix is allocated to the access and aggregation layers, and another separate network prefix is allocated to the IP core layer. Only an aggregated IPv6 route (locator and loopback address) is advertised between the aggregation and IP core layers. SRv6 service nodes only need to learn the aggregated route and the specific routes in the local domain to carry E2E SRv6 services. In addition, the number of service configuration points is reduced to two: ingress and egress. As such, the specific routes of a domain are not flooded to other domains. In addition, route changes, such as route flapping, in one domain do not cause frequent route changes in another domain. This enhances security and stability within the network.

## 5.2. BGP in SRv6

On an SRv6 network, in addition to the conventional route advertisement function, BGP also supports information exchange between forwarders and a controller. Forwarders use BGP-LS (Link State) to report information, such as the network topology and latency, to the controller for path computation. To support SR, forwarders need to report SR information to the controller through BGP-LS. Additionally, the controller uses BGP SR Policy to deliver SR path information. For this reason, on an SRv6 network, BGP design needs to consider not only the IPv6 unicast address family peer design and VPN/EVPN address family peer design, but also the BGP-LS address family peer design and BGP IPv6 SR-Policy address family peer design.

In a VPN network (which uses MP-BGP to distribute VPN routes), a Route Reflector (RR) eliminates the need for a full mesh by allowing PE routers to peer only with the RR, which then reflects VPN routes to all other PEs. BGP treats VPNv4 (IPv4 VPN) and VPNv6 (IPv6 VPN) as different address families. Both VPNv4 and VPNv6 need to be enabled in MP-BGP when using both addresses families in, for example, Ships-in-the-night deployments. A single VPN can be supported by both MPLS and SRv6 simultaneously in SIN mode, but the two control planes operate independently, and seamless interworking requires additional mechanisms.

BGP information types have various roles in SRv6. VPNv6 routes carry customer VPN routes with SRv6 SIDs (End.DT6, End.DX4, etc.). BGP-LS collects and distributes SRv6 topology info to controllers (e.g., for SDN) and BGP SRv6 policies distribute SRv6 Traffic Engineering (TE) policies (e.g., Flex-Algo, explicit paths).

### 5.3. VPN Service Design

SRv6 VPN services can use BGP as the unified signaling control plane to provide L2/3 service connections. EVPN can be used to carry both L3VPN and L2VPN services in SRv6, thereby simplifying protocols. Hierarchical VPN is widely deployed on MPLS networks to reduce the number of routes on access devices at network edges. E2E VPN is recommended for SRv6 networks because only service access points, instead of transit nodes, need to be configured. Also, transit nodes do not need to be aware of services, and this in turn facilitates both deployment and maintenance.

### 5.4. Migration steps

Let's take MPLS L3VPN as an example to describe how L3VPN services can evolve from MPLS to SRv6. After network nodes are upgraded to support SRv6, L3VPN services can be migrated from MPLS to SRv6 using the following procedure:

1. Configure interface IPv6 addresses and locators.
2. Configure IS-IS IPv6 and enable SRv6, and then configure the forwarders to advertise locator routes.
3. Establish BGP peer relationships between the controller and forwarders using the IPv6 unicast address family, and enable BGP-LS and BGP IPv6 SR-Policy. The controller delivers SRv6 Policies, and SRv6 TE tunnels are established on forwarders.

4. On Forwarders, establish BGP VPNv4 peer relationships using IPv6 addresses so that BGP VPNv4 peers advertise VPN routes to each other. The color attribute of the VPN routes is consistent with that of SRv6 Policies to ensure that VPN routes can recurse to the SRv6 Policy.
5. Each forwarder has two routes with the same prefix, one carrying the MPLS VPN label received from the BGP peer established using IPv4 addresses and the other carrying the VPN SID received from the BGP peer established using IPv6 addresses. If the two routes have the same attributes, a forwarder by default preferentially selects the route received from the BGP peer established using IPv4 addresses, and services can still be carried over MPLS tunnels.
6. Configure a route policy so that the forwarder preferentially selects the route received from the BGP peer established using IPv6 addresses. Then, traffic will be automatically switched to SRv6 tunnels, and L3VPN services will be migrated to the SRv6 tunnels.
7. Delete the MPLS tunnel, BGP peer relationships established using the IPv4 unicast address family, and MPLS configurations.

After an SRv6 tunnel is established, services can be migrated from MPLS to SRv6.

## 6. IANA Considerations

N/A

## 7. Security Considerations

## 8. Acknowledgement

## 9. References

### 9.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

## 9.2. Informative References

- [I-D.ietf-spring-srv6-mpls-interworking]  
Agrawal, S., Filsfils, C., Voyer, D., Dawra, G., Li, Z.,  
and S. Hegde, "SRv6 and MPLS interworking", Work in  
Progress, Internet-Draft, draft-ietf-spring-srv6-mpls-  
interworking-00, 17 October 2024,  
<<https://datatracker.ietf.org/doc/html/draft-ietf-spring-srv6-mpls-interworking-00>>.
- [I-D.liu-srv6ops-problem-summary]  
Liu, Y., Voyer, D., Graf, T., Miklos, Z., Contreras, L.  
M., Leymann, N., Song, L., Matsushima, S., Xie, C., and X.  
Yi, "SRv6 Deployment and Operation Problem Summary", Work  
in Progress, Internet-Draft, draft-liu-srv6ops-problem-  
summary-05, 8 May 2025,  
<<https://datatracker.ietf.org/doc/html/draft-liu-srv6ops-problem-summary-05>>.

## Authors' Addresses

Mike McBride  
Futurewei  
Email: [mmcbride7@gmail.com](mailto:mmcbride7@gmail.com)

Yisong Liu  
China Mobile  
Email: [liuyisong@chinamobile.com](mailto:liuyisong@chinamobile.com)

Zhenbin Li  
Huawei Technologies  
Email: [lizhenbin@huawei.com](mailto:lizhenbin@huawei.com)

Mehmet Durmus  
Turkcell  
Email: [mehmet.durmus@turkcell.com.tr](mailto:mehmet.durmus@turkcell.com.tr)

Ersin Erdogan  
Turkcell  
Email: [ersin.erdogan@turkcell.com.tr](mailto:ersin.erdogan@turkcell.com.tr)

Gyan S. Mishra  
Verizon Inc.

Email: [gyan.s.mishra@verizon.com](mailto:gyan.s.mishra@verizon.com)