

MPLS Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: 1 September 2025

G. Mirsky  
Ericsson  
L. Zhang  
L. Andersson  
Huawei Technologies  
28 February 2025

Simple Two-way Active Measurement Protocol (STAMP) for MPLS Label  
Switched Paths (LSPs)  
draft-mirsky-mpls-stamp-12

## Abstract

Simple Two-way Active Measurement Protocol (STAMP), defined in RFC 8762 and RFC 8972, is expected to be able to monitor the performance of paths between systems that use a wide variety of encapsulations. This document defines encapsulation and bootstrapping of a STAMP test session over an MPLS Label Switched Path.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 1 September 2025.

## Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	2
1.1. Conventions Used in this Document . . . . .	3
1.1.1. Abbreviations . . . . .	3
1.1.2. Requirements Language . . . . .	3
2. Encapsulation of a STAMP Test Packet . . . . .	3
3. Bootstrap STAMP Using LSP Ping . . . . .	4
3.1. STAMP Session Identifier TLV . . . . .	4
3.2. Return Codes . . . . .	6
4. STAMP Session Establishment . . . . .	7
5. IANA Considerations . . . . .	7
5.1. STAMP Session Identifier TLV . . . . .	7
5.2. Return Codes . . . . .	8
6. Security Considerations . . . . .	8
7. Acknowledgments . . . . .	8
8. References . . . . .	8
8.1. Normative References . . . . .	8
8.2. Informational References . . . . .	9
Authors' Addresses . . . . .	10

## 1. Introduction

[RFC8762] and [RFC8972] defined the base specification and optional extensions of the Simple Two-Way Active Measurement Protocol (STAMP). The reader is expected to be familiar with the terminology of [RFC8762] and [RFC8972]. STAMP can be used to measure packet loss, and packet delay, detect packet re-ordering, and unwanted multiple copies of a STAMP packet. This document defines the encapsulation of the STAMP test packet over a Multiprotocol Label Switching (MPLS) Label Switched Path (LSP). Also, the use of LSP Ping [RFC8029] to bootstrap and control the path for the reflected STAMP test packet is discussed in the document. [RFC8762] defined two modes of a STAMP Session-Reflector - Stateful and Stateless. While using the LSP Ping extension to bootstrap a STAMP test session applies for both Session-Reflector modes, controlling the path for the reflected STAMP test packet is appropriate for the Stateful mode of the Session-Reflector only.

This document defines the STAMP Session Identifier TLV as an extension to LSP Ping [RFC8029]. It is to be used to instruct the STAMP Session-Reflector how to demultiplex incoming STAMP test sessions and a path to use for the reflected STAMP test packets. The TLV will be allocated from the TLV and sub-TLV registry defined in [RFC8029]. As a special case, forward and reverse directions of the STAMP test session can form a bi-directional co-routed associated channel.

## 1.1. Conventions Used in this Document

### 1.1.1. Abbreviations

STAMP: Simple Two-way Active Measurement Protocol

MPLS: Multiprotocol Label Switching

LSP: Label Switched Path

LSR: Label Switching Router

SSID: STAMP Session Identifier

### 1.1.2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

## 2. Encapsulation of a STAMP Test Packet

STAMP can be used to measure one-way and round-trip packet loss and packet delay, and detect packet re-ordering, and unwarranted replication of a STAMP test packet. [RFC8762] defined formats of a STAMP test packet and reflected STAMP test packet in unauthenticated and authenticated modes, respectively. These STAMP test packets can be encapsulated in IP/UDP to be transmitted over an MPLS LSP as follows:

- \* The STAMP test packet sent by the ingress Label Switching Router (LSR) SHOULD be a UDP packet with a well-known destination port 862 [RFC8762] and a source port assigned by the sender. The destination UDP port MAY be selected from the Dynamic UDP ports range. The mechanism used to select the port number from the Dynamic range is outside the scope of this document.

- \* The destination IP address MUST be chosen from the 127/8 range for IPv4. For IPv6, the destination address MUST be chosen from the IPv6 Dummy Prefix range [IANA-IPv6-Special-Purpose-Address-Registry]. Method of selecting an IP address from the range is outside the scope of this document.
- \* For the STAMP test packet, the sender MUST set the IP TTL or hop limit to 255 [RFC5082].
- \* The source IP address is a routable address of the sender.
- \* The reflected STAMP test packets are UDP packets.
- \* The source IP address of a reflected STAMP test packet is a routable address of the STAMP Session-Reflector.

### 3. Bootstrap STAMP Using LSP Ping

A STAMP test session over an MPLS LSP can be bootstrapped using LSP Ping, defined in [RFC8029]. To bootstrap a STAMP test session, STAMP Session Identifier TLV MUST be used. When LSP Ping is used to bootstrap a STAMP test session, the Reply Mode field SHOULD be set to "Reply via an IPv4/IPv6 UDP packet" (2) value. In some environments, e.g., point-to-multipoint LSP, the Reply Mode field MAY be set to "Do not reply" (1). The value of the Reply Mode field MUST NOT be set to "Reply via an IPv4/IPv6 UDP packet with Router Alert" (3) [RFC9570]. This document defines a new TLV - the STAMP Session Identifier (SSID) TLV. The SSID TLV MUST contain the STAMP Session Identifier (SSID) [RFC8972] value and MAY contain none, one or more sub-TLVs that can be used to carry information about the path for reflected STAMP test packet.

#### 3.1. STAMP Session Identifier TLV

The STAMP Session Identifier TLV is an optional TLV within the LSP Ping [RFC8029]. The STAMP Session Identifier TLV carries SSID value and, optionally, information about the path onto which the STAMP Session-Reflector MUST transmit reflected STAMP test packets for the given STAMP test session. The format of the STAMP Session Identifier TLV is as presented in Figure 1.

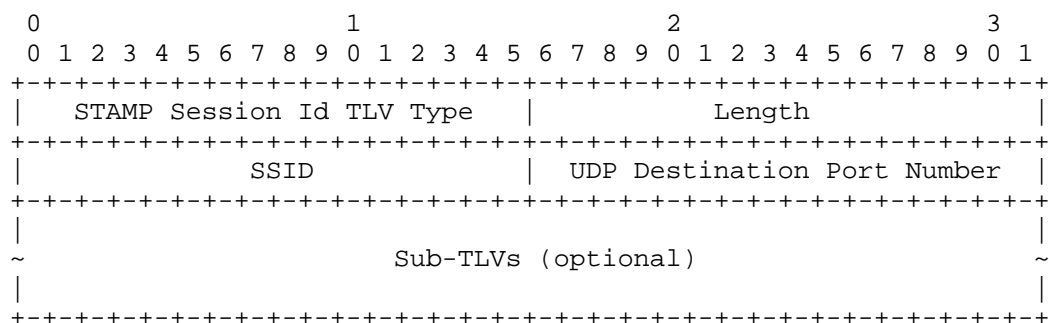


Figure 1: STAMP Session Identifier TLV

STAMP Session Identifier Type is a two-octet field and has a value of TBD1 (to be assigned by IANA as requested in Section 5).

Length is a two-octet field equal to the length in octets of the SSID, UDP Destination Port Number, Reserved, and Sub-TLVs fields. The minimum value MUST be eight.

SSID field is a two-octet field that identifies the STAMP test session at the STAMP Session-Sender.

UDP Destination Port Number is a two-octet field. The field indicates the value of the UDP destination port in test packet transmitted by the Session-Sender for the test session with SSID. The Session-Sender MAY set the value of the field to 862 that is assigned by IANA as TWAMP-Test Receiver Port. If the value of the field is not equal to 862 then it MUST be one from the range of Dynamic ports, i.e., from 49152 to 65535. Any other value of the UDP Destination Port Number field is invalid and the Session-Reflector MUST send an Echo Reply message with the received STAMP Session Identifier TLV and set the Return Code field to "UDP Destination Port Unavailable" (Section 5.2).

Sub-TLVs field contains zero or more sub-TLVs, i.e., nested TLVs that have independent types and MUST be four-octet aligned. This field MAY be used to define the path of the reflected STAMP test packet. In that case, Only non-multicast Target FEC Stack sub-TLVs (already defined or to be defined in the future) for TLV Types 1, 16, and 21 in the "Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry are permitted to be used in this field. Other sub-TLVs MUST NOT be used. (This implies that multicast Target FEC Stack sub-TLVs, e.g., the Multicast P2MP LDP FEC Stack sub-TLV and the Multicast MP2MP LDP FEC Stack sub-TLV, are not permitted in the Sub-TLVs field.) If no Target FEC Stack sub-TLVs are found in the STAMP Session Identifier TLV, the STAMP Session-Reflector MUST revert to transmitting the STAMP reflected packets over the IP network.

If the STAMP Session-Reflector cannot find the path specified in the STAMP Session Identifier TLV, it MUST send Echo Reply with the received STAMP Session Identifier TLV and set the Return Code to "The specified Reflected Packet Path was not found" (Section 5.2).

The STAMP Session Identifier TLV MAY be used in the bootstrapping of a STAMP test session. A STAMP Session-Reflector that supports this specification MUST support subsequent STAMP Session Identifier TLVs after the STAMP test session with the given SSID has been established. The system that receives a new path in the Sub-TLVs field for the established STAMP test session MUST use the new path for the reflected STAMP test packets. Suppose a system that supports this specification receives an LSP Ping with the STAMP Session Identifier TLV with no Target FEC Stack sub-TLVs in the Sub-TLVs field, even though the reflected test packets for the specified STAMP test session has been transmitted according to the previously received STAMP Session Identifier TLV. In that case, the egress LSR MUST transition to transmitting reflected STAMP packets over an IP network.

### 3.2. Return Codes

This document defines the following Return Codes for MPLS LSP Echo Reply:

- \* "The specified Reflected Packet Path was not found", (TBD2). When a specified reverse path is not available at the STAMP Session-Reflector an Echo Reply with the Return Code set to "The specified Reflected Packet Path was not found" MUST be sent back to the STAMP Session-Sender Section 3.1.

- \* "UDP Destination Port Unavailable" (TBD3). If the value of the Destination UDP Port Number field is not 862, nor is from the Dynamic ports range, the Session-Reflector MUST send an Echo Reply to the Session-Sender with the Return Code set to "UDP Destination Port Unavailable".

#### 4. STAMP Session Establishment

A STAMP test session can be bootstrapped using LSP Ping. To monitor performance for a particular MPLS LSP and FEC combination LSP Ping Echo request and Echo reply packets, in the ping mode, exchanged between the STAMP Session-Sender and Session-Reflector for that MPLS LSP and FEC combination. If LSP Ping is used to establishing a STAMP test session, an LSP Ping Echo request message MUST carry the SSID value assigned by the Session-Sender for the STAMP test session. This MUST subsequently be used as the SSID field in the STAMP test session packets sent by the STAMP Session-Sender.

On receipt of the LSP Ping Echo request message, the STAMP Session-Reflector MUST send an LSP Ping Echo reply if the validation of the FEC in the LSP Ping Echo request message succeeds. The Session-Reflector SHOULD use the value in the SSID field and source IP address in the received LSP Ping Echo request message to demultiplex STAMP test sessions. The Session-Reflector MAY use a combination of other values in IP/UDP headers instead of using SSID to demultiplex STAMP test sessions.

If the MPLS network includes an equal-cost multipath environment, a STAMP Session-Sender MUST use the same value of an Entropy Label ([RFC6790] and [RFC8662]) in the LSP Ping Echo request that bootstraps the STAMP test session and consecutive STAMP test packets.

#### 5. IANA Considerations

##### 5.1. STAMP Session Identifier TLV

The IANA is requested to assign a new value for the "STAMP Session Identifier TLV" from the Standard Action range (0-16383), that requires a response if not recognized, from the "TLVs registry" in the "Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry group.

Value	Description	Reference
(TBD1)	STAMP Session Identifier TLV	This document

Table 1: New BFD Reverse Type TLV

## 5.2. Return Codes

IANA is requested to assign two new Return Codes from the Standards Action range of the Return Codes registry in the "Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs) Ping Parameters" registry group.

Value	Description	Reference
(TBD2)	The specified Reflected Packet Path was not found.	This document
(TBD3)	UDP Destination Port Unavailable.	This document

Table 2: New Return Code

## 6. Security Considerations

Security considerations discussed in [RFC8029], [RFC8762], and [RFC8972] apply to this document.

## 7. Acknowledgments

The authors sincerely appreciate Richard "Footer" Foote's thoughtful comments. The authors express their sincere appreciation of the thorough review and text contributed by Loa Andersson.

## 8. References

### 8.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.



- [RFC6790] Kompella, K., Drake, J., Amante, S., Henderickx, W., and L. Yong, "The Use of Entropy Labels in MPLS Forwarding", RFC 6790, DOI 10.17487/RFC6790, November 2012, <<https://www.rfc-editor.org/info/rfc6790>>.
- [RFC8029] Kompella, K., Swallow, G., Pignataro, C., Ed., Kumar, N., Aldrin, S., and M. Chen, "Detecting Multiprotocol Label Switched (MPLS) Data-Plane Failures", RFC 8029, DOI 10.17487/RFC8029, March 2017, <<https://www.rfc-editor.org/info/rfc8029>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8662] Kini, S., Kompella, K., Sivabalan, S., Litkowski, S., Shakir, R., and J. Tantsura, "Entropy Label for Source Packet Routing in Networking (SPRING) Tunnels", RFC 8662, DOI 10.17487/RFC8662, December 2019, <<https://www.rfc-editor.org/info/rfc8662>>.
- [RFC8762] Mirsky, G., Jun, G., Nydell, H., and R. Foote, "Simple Two-Way Active Measurement Protocol", RFC 8762, DOI 10.17487/RFC8762, March 2020, <<https://www.rfc-editor.org/info/rfc8762>>.
- [RFC8972] Mirsky, G., Min, X., Nydell, H., Foote, R., Masputra, A., and E. Ruffini, "Simple Two-Way Active Measurement Protocol Optional Extensions", RFC 8972, DOI 10.17487/RFC8972, January 2021, <<https://www.rfc-editor.org/info/rfc8972>>.
- [RFC9570] Kompella, K., Bonica, R., and G. Mirsky, Ed., "Deprecating the Use of Router Alert in LSP Ping", RFC 9570, DOI 10.17487/RFC9570, May 2024, <<https://www.rfc-editor.org/info/rfc9570>>.

## 8.2. Informational References

- [IANA-IPv6-Special-Purpose-Address-Registry] IANA, "IANA IPv6 Special-Purpose Address Registry", <<https://www.iana.org/assignments/iana-ipv6-special-registry/iana-ipv6-special-registry.xhtml>>.
- [RFC5082] Gill, V., Heasley, J., Meyer, D., Savola, P., Ed., and C. Pignataro, "The Generalized TTL Security Mechanism (GTSM)", RFC 5082, DOI 10.17487/RFC5082, October 2007, <<https://www.rfc-editor.org/info/rfc5082>>.

Authors' Addresses

Greg Mirsky  
Ericsson  
Email: gregimirsky@gmail.com

Li Zhang  
Huawei Technologies  
China  
Email: zhangli344@huawei.com

Loa Andersson  
Huawei Technologies  
Email: loa@pi.nu