

detnet  
Internet-Draft  
Intended status: Standards Track  
Expires: 2 January 2026

Q. Xiong  
A. Liu  
ZTE Corporation  
R. Gandhi  
Cisco Systems, Inc.  
D. Yang  
Beijing Jiaotong University  
1 July 2025

Data Fields for DetNet Enhanced Data Plane  
draft-xiong-detnet-data-fields-edp-03

## Abstract

The DetNet-specific metadata should be carried in enhanced data plane based on the enhancement requirements. This document proposes the common DetNet data fields and option types such as Aggregation Option and Deterministic Latency Option. The common DetNet Data-Fields can be encapsulated into a variety of protocols such as MPLS, IPv6 and SRv6 networks.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 2 January 2026.

## Copyright Notice

Copyright (c) 2025 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights

and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	3
2. Conventions used in this document . . . . .	3
2.1. Requirements Language . . . . .	3
2.2. Terminology . . . . .	4
2.3. Abbreviations . . . . .	4
3. Specific Metadata for DetNet Enhanced Data Plane . . . . .	4
3.1. Aggregation-based Metadata . . . . .	4
3.2. Deterministic Latency Metadata . . . . .	5
4. Data Fields for DetNet Enhanced Data Plane . . . . .	6
4.1. DetNet Option-Types and Data-Fields . . . . .	6
4.2. Aggregation Option . . . . .	7
4.3. Deterministic Latency Option . . . . .	8
4.3.1. Data Field in Right-bounded Category . . . . .	9
4.3.2. Date Field in Flow Level Periodic Bounded Category . . . . .	10
4.3.3. Date Field in Class Level Periodic Bounded Category . . . . .	10
4.3.4. Date Field in Flow Level Non-periodic Bounded Category . . . . .	11
4.3.5. Date Field in Class Level Non-periodic Bounded Category . . . . .	11
4.3.6. Date Field in Flow Level Rate-based Unbounded Category . . . . .	12
4.3.7. Date Field in Flow Level Rate-based Left-bounded Category . . . . .	12
5. Encapsulation Considerations for DetNet Enhanced Data Plane . . . . .	13
5.1. Metadata for DetNet Enhanced Data Plane . . . . .	13
5.2. Encoding for DetNet Enhanced Data Plane . . . . .	14
5.2.1. Reuse of the Existing DSCP/TC Field . . . . .	14
5.2.2. New Common Data Fields . . . . .	14
6. Security Considerations . . . . .	14
7. IANA Considerations . . . . .	14
8. Acknowledgements . . . . .	15
9. Informative References . . . . .	15
Authors' Addresses . . . . .	18

## 1. Introduction

According to [RFC8655], Deterministic Networking (DetNet) operates at the IP layer and delivers service which provides extremely low data loss rates and bounded latency within a network domain. DetNet data planes has been specified in [RFC8938]. As described in [RFC9320], the end-to-end bounded latency depends on the value of queuing delay bound along with the queuing mechanisms. Multiple queuing mechanisms has been proposed to guarantee the bounded latency in IEEE802.1 TSN (Time-Sensitive Networking) Task Group. But the existing deterministic technologies are facing large-scale number of nodes and long-distance transmission, traffic scheduling, dynamic flows, and other controversial issues in large-scale networks. The DetNet is required to support a enhanced data plane method of flow identification and packet treatment.

For scaling networks, [I-D.ietf-detnet-scaling-requirements] has described the enhancement requirements for DetNet enhanced data plane, such as aggregated flow identification and deterministic latency guarantees. For example, the flow identification with service-level aggregation and explicit aggregated flow identification should be supported. And queuing mechanisms and solutions require different information to be defined as the DetNet-specific metadata to help the functions of ensuring deterministic latency, including regulation, queue management, etc. Several data plane enhancement solutions and queuing mechanisms have been discussed in DetNet. And [I-D.ietf-detnet-dataplane-taxonomy] has defined the classification criteria and the suitable categories for DetNet data plane solutions.

This document proposes the specific metadata which should be carried in DetNet Enhanced Data Plane (EDP) and proposes the common DetNet data fields and option types such as Aggregation Option and Deterministic Latency Option. The common DetNet Data-Fields can be encapsulated into a variety of protocols such as MPLS, IPv6 and SRv6 networks.

## 2. Conventions used in this document

### 2.1. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

## 2.2. Terminology

This document uses the terms defined in [RFC8655], [RFC8938], [I-D.ietf-detnet-scaling-requirements] and [I-D.ietf-detnet-dataplane-taxonomy].

## 2.3. Abbreviations

SRH:Segment Routing Header

SRv6:Segment Routing for IPv6 forwarding plane

DL:Deterministic Latency

CSQF:Cycle Specified Queuing and Forwarding

TQF:Timeslot Queuing and Forwarding

C-SCORE:Work Conserving Stateless Core Fair Queuing

EDF:Earliest Deadline First

TAS:Time Aware Shaper

ATS:Asynchronous Traffic Shaping

CQF:Cyclic Queuing and Forwarding

FQ:Fair Queuing

TSN:Time-Sensitive Networking

ECQF:Enhanced Cyclic Queuing and Forwarding

gLBF:guaranteed Latency Based Forwarding

EDP:DetNet Enhanced Data Plane

## 3. Specific Metadata for DetNet Enhanced Data Plane

### 3.1. Aggregation-based Metadata

As per [RFC8655], the DetNet data plane must support the aggregation of DetNet flows in order to support larger numbers of DetNet flows and improve scalability by reducing the per-hop states. And the flow aggregation may be necessary for scaling networks. As per [I-D.ietf-detnet-scaling-requirements], the deterministic services may demand different deterministic QoS requirements according to

different levels of application requirements. The flow identification with service-level aggregation and explicit aggregated flow identification should be supported. In DetNet MPLS, A-Label defined as per [RFC8964] can be added explicitly to the packets. But in other DetNet data plane, no aggregated flow specific information is available.

Furthermore, it is required to be dynamic and simplified to ensure the aggregated flows have compatible DetNet flow-specific QoS characteristics. The individual flows may be aggregated for treatment based on shared service specification on aggregated-class level which identified by an aggregation class as per [I-D.xiong-detnet-flow-aggregation]. This document proposes the aggregation-based metadata in enhanced data plane for the DetNet nodes along the path to identify the aggregated flow and achieve the end-to-end QoS in scaling networks.

### 3.2. Deterministic Latency Metadata

As described in [RFC9320], the end-to-end bounded latency depends on the queuing delay bound and the queuing mechanisms. Multiple queuing mechanisms have been proposed such as TAS [IEEE802.1Qbv], CBS [IEEE802.1Q-2014], ATS [IEEE802.1Qcr], CQF [IEEE802.1Qch] and so on. In scaling networks which has large variation in latency among hops, great number of flows and multiple domains. [I-D.ietf-detnet-scaling-requirements] has described the technical requirements for enhanced data plane solutions. Many variations and extensions of queuing mechanisms have been proposed to resolve the scalability issues in DetNet. For example, the CQF variations for cyclic-based scheduling includes the ECQF [IEEE 802.1Qdv], TCQF [I-D.eckert-detnet-tcwf] and CSQF [I-D.chen-detnet-sr-based-bounded-latency]. The TAS variations for timeslot-based scheduling includes TQF [I-D.peng-detnet-packet-timeslot-mechanism]. The FQ variations for rate-based scheduling includes C-SCORE [I-D.joung-detnet-stateless-fair-queuing], ATS [IEEE802.1Qcr] and gLBF [I-D.eckert-detnet-glb]. The EDF variations for deadline-based scheduling includes EDF [I-D.peng-detnet-deadline-based-forwarding].

And when queuing mechanisms used in large-scale networks, the per-flow states can not be maintained with scalability issues. Some queuing parameters should be carried for coordination between nodes so as to make appropriate packet forwarding and scheduling decisions to meet the time bounds. As per [I-D.ietf-detnet-scaling-requirements], the information used by functions ensuring deterministic latency should be supported as such queuing-based information. And queuing mechanisms and solutions require different information to help the functions of ensuring

deterministic latency, including regulation, queue management. The deterministic latency metadata should be defined as the DetNet-specific metadata for DetNet enhanced data plane.

[I-D.ietf-detnet-dataplane-taxonomy] has defined the classification criteria and the suitable categories for this solutions. This proposes the deterministic latency metadata align with the categories in enhanced data plane for the DetNet nodes along the path to apply the queuing mechanisms and get the related deterministic latency metadata in the packet to achieve the end-to-end bounded latency.

#### 4. Data Fields for DetNet Enhanced Data Plane

##### 4.1. DetNet Option-Types and Data-Fields

The enhanced functions and related metadata for DetNet should be confirmed before the encapsulations. While more than one metadata should be carried in enhanced data plane, the common DetNet header should be considered to cover all option-types and data as Figure 1.

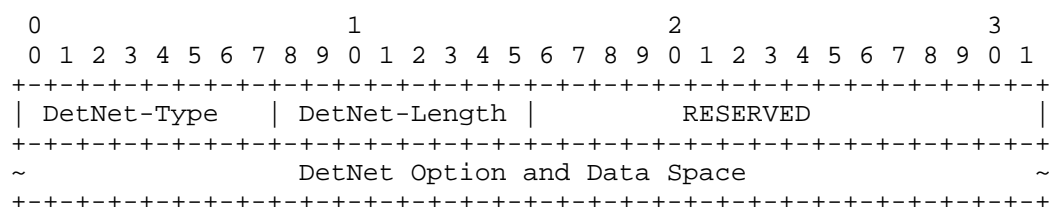


Figure 1 DetNet Header for Enhanced Data Plane

DetNet-Type: 8-bit unsigned integer, defining the DetNet Option-type for enhanced DetNet. This document defines two options and option-types:

Aggregation Option-Type, TBD1, as defined in section 4.2.

Deterministic Latency Option-Type, TBD2, as defined in section 4.3.

DetNet-Length: 8-bit unsigned integer, defined the Length of the DetNet Header 4-octet units.

DetNet Option and Data Space: variable, it MUST be aligned by 4 octets. It carries data that is added by the DetNet encapsulating node and interpreted by the decapsulating node. The DetNet transit nodes MAY process the data by forwarding the option data determined by option type and may modify it. The DetNet Option consists of a fixed-size "Option Header" and a variable-size "Option Data". The Header and Data may be encapsulated continuously or separately. A Data or more than one Data in lists can be carried in packets.

#### 4.2. Aggregation Option

The format of Aggregation Option Header is shown in Figure 2.




Figure 2 Aggregation Option Header

Aggregation type(16 bits): indicates the aggregation type of packet treatment ensuring the deterministic latency as Figure 3 shown. This type can also indicate the aggregated class.



Figure 3 Aggregation Type

Flag: 8-bit flags field. When E is set to 1, it indicates the explicit aggregated flow identification.

Data Len: 8-bit unsigned integer. Length of option data, in octets.

The related option data is defined as Aggregation Option Data in Figure 4.

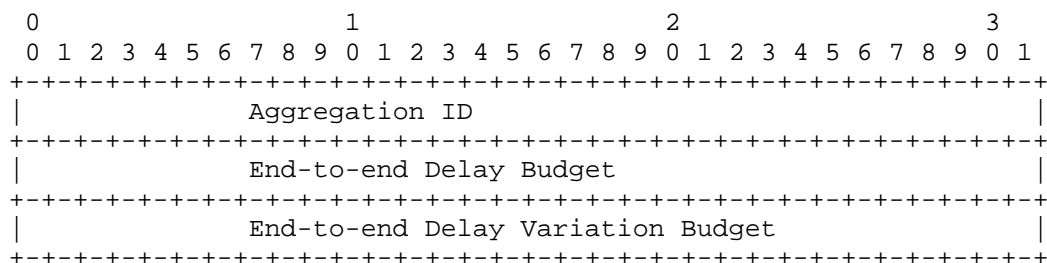


Figure 4 Aggregation Option Data

Aggregation ID: 32bits. It provides explicit and unique identifier for aggregated flow identification. DetNet nodes performing aggregation using aggregation ID.

End-to-end Delay Budget: 32bits. It provides the value of end-to-end delay budget for the aggregated flow.

End-to-end Delay Variation Budget: 32bits. It provides the value of end-to-end delay variation budget for the aggregated flow.

### 4.3. Deterministic Latency Option

The format of Deterministic Latency Option Header is shown in Figure 5.




Figure 5 Deterministic Latency Option header

Deterministic Latency Type(16 bits): indicates the type of deterministic latency information with related queuing and scheduling metadata and it aglined with the suitable categories as defined in [I-D.ietf-detnet-dataplane-taxonomy] and shown in Figure 6.

Value	Deterministic Latency Type
0x0000	Unassigned
0x0001	Right-bounded category
0x0002	Flow level periodic bounded category
0x0003	Class level periodic bounded category
0x0004	Flow level non-periodic bounded category
0x0005	Class level non-periodic bounded category
0x0006	Flow level rate based unbounded category
0x0007	Flow level rate based left-bounded category

Figure 6 Deterministic Latency Type

Flag: 8-bit flags field. Data Len: 8-bit unsigned integer. Length of option data, in octets.

The related option data is defined as Deterministic Latency option data which provides function-based or queuing-based information for a node to forward a DetNet flow. The data of which is determined by the deterministic latency type. The DetNet option data can be provided one time or in list. The examples of different types of data is as following sections shown.

#### 4.3.1. Data Field in Right-bounded Category

As per [I-D.ietf-detnet-dataplane-taxonomy], for solutions in the right-bounded category, a packet has only a maximum time bound.

When the type is set to 0x0001, indicates the queuing and scheduling solutions in right-bounded category. The data field and related information may be carried and designed as following shown:

0	1	2	3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1			
Maximum time bound			

Figure 7 Data Field in Right-bounded Category

Maximum time bound: 32bits, indicates the required maximum time bound of a packet.

#### 4.3.2. Date Field in Flow Level Periodic Bounded Category

As per [I-D.ietf-detnet-dataplane-taxonomy], the flow Level periodic bounded solutions define a set of time slots, which will be scheduled for flows or flow aggregates.

When the type is set to 0x0002, indicates the queuing and scheduling solutions in flow level periodic bounded category. The data field and related information may be carried and designed as following shown:

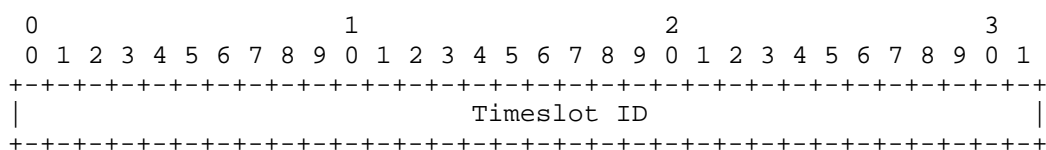


Figure 8 Data Field in Flow Level Periodic Bounded Category

Timeslot ID: indicates the identifier of the timeslot scheduled for a flow.

#### 4.3.3. Date Field in Class Level Periodic Bounded Category

As per [I-D.ietf-detnet-dataplane-taxonomy], the periodic bounded solutions can be further categorized by the traffic granularity with class level subcategory. The class Level periodic bounded solutions define a set of cycles and each cycle will be scheduled for flows or flow aggregates within a class level.

When the type is set to 0x0003, indicates the queuing and scheduling solutions in class level periodic bounded category. The data field and related information may be carried and designed as following shown:




Figure 9 Data Field in Class Level Periodic Bounded Category

Cycle ID (32bits): indicates the identifier which the queue applied for a node to forward DetNet flows within a class level.

#### 4.3.4. Date Field in Flow Level Non-periodic Bounded Category

As per [I-D.ietf-detnet-dataplane-taxonomy], flow level non-periodic bounded solutions guarantee the minimum and maximum bounds of a packet in a flow or flow aggregate.

When the type is set to 0x0004, indicates the queuing and scheduling solutions in flow level non-periodic bounded category. The data field and related information may be carried and designed as following shown:

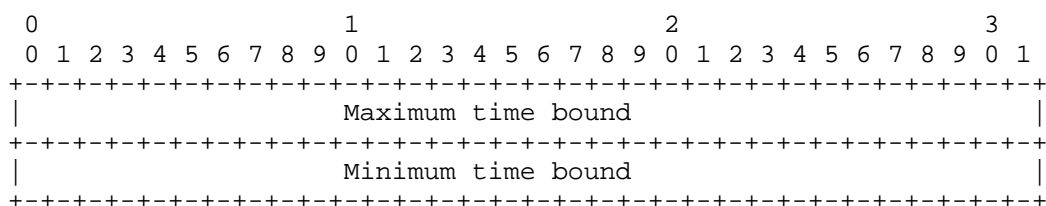


Figure 10 Data Field in Flow Level Non-periodic Bounded Category

Maximum time bound: 32bits, indicates the maximum time bound of a packet in a flow or flow aggregates.

Minimum time bound: 32bits, indicates the minimum time bound of a packet in a flow or flow aggregates.

#### 4.3.5. Date Field in Class Level Non-periodic Bounded Category

As per [I-D.ietf-detnet-dataplane-taxonomy], class level non-periodic bounded solutions guarantee the minimum and maximum bounds of a packet within a class level.

When the type is set to 0x0005, indicates the queuing and scheduling solutions in class level non-periodic bounded category. The data field and related information may be carried and designed as following shown:

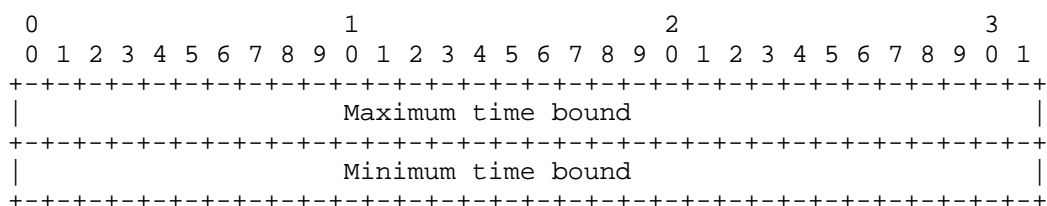


Figure 11 Data Field in Class Level Non-periodic Bounded Category

Maximum time bound: 32bits, indicates the maximum time bound of a packet within a class level .

Minimum time bound: 32bits, indicates the minimum time bound of a packet within a class level.

#### 4.3.6. Date Field in Flow Level Rate-based Unbounded Category

In flow level rate based unbounded category, the latency bound is primarily influenced by the ratio of a flow's maximum packet size, its allocated service rate and completion time.

When the type is set to 0x0006, indicates the queuing and scheduling solutions in flow level rate based unbounded category. The data field and related information may be carried and designed as following shown:

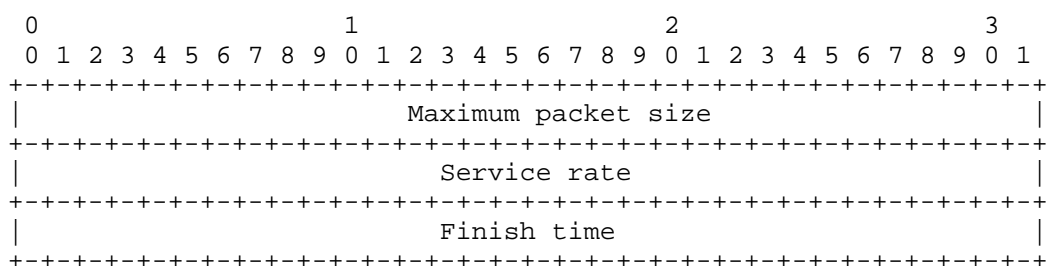


Figure 12 Data Field in Flow Level Rate-based Unbounded Category

Maximum packet size: 32 bits, indicates the maximum packet size of a flow.

Service rate: 32 bits, indicates the allocated service rate of a flow.

Finish time: 32 bits, indicates the required service completion time of a flow.

#### 4.3.7. Date Field in Flow Level Rate-based Left-bounded Category

In flow level rate based left-bounded category, the latency bound is primarily influenced by the ratio of a flow's maximum packet size, its allocated service rate, start time and completion time.

When the type is set to 0x0007, indicates the queuing and scheduling solutions in flow level Rate based left-bounded category. The data field and related information may be carried and designed as following shown:

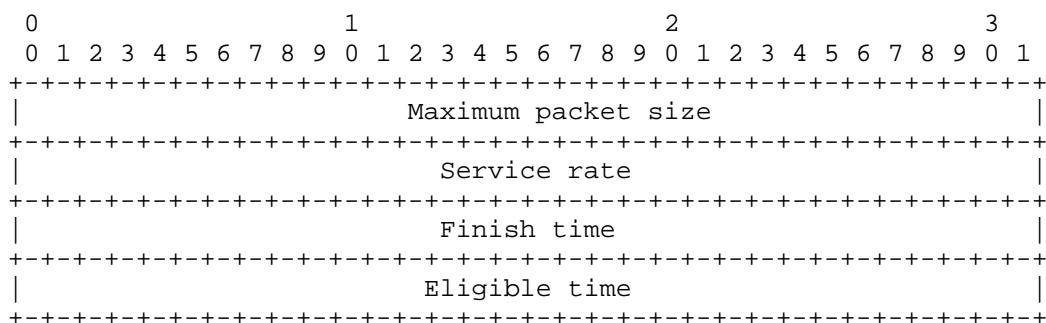


Figure 13 Data Field in Flow Level Rate-based Left-bounded Category

Maximum packet size: 32 bits, indicates the maximum packet size of a flow.

Service rate: 32 bits, indicates the allocated service rate of a flow.

Finish time: 32 bits, indicates the required service completion time of a flow.

Eligible time: 32bits, indicates the required service start time of a flow.

## 5. Encapsulation Considerations for DetNet Enhanced Data Plane

### 5.1. Metadata for DetNet Enhanced Data Plane

The packet treatment should indicate the behaviour action ensuring the deterministic latency at DetNet nodes such as queuing-based mechanisms. The deterministic latency type and related parameters such as queuing-based information should be carried as metadata in data plane. And the definitions may follow these policies.

The data plane enhancement must be generic and the format must be applied to all functions and queuing mechanisms. The metadata and definitions should be common among different candidate queuing solutions.

Information and metadata MUST be simplified and limited to be carried in DetNet packets for provided deterministic latency related scheduling along the forwarding path. For example, the queuing-based information should be carried in metadata for coordination between nodes.

The requirement of the flow or service may be not suitable to be carried explicitly in DetNet data plane. The packet treatment should schedule the resources and indicate the behaviour to ensure the deterministic latency in forwarding sub-layer. So the queuing mechanisms could be viewed as a type of deterministic resources. The resources type and queuing type should be explicitly indicated.

## 5.2. Encoding for DetNet Enhanced Data Plane

### 5.2.1. Reuse of the Existing DSCP/TC Field

Reusing the DSCP or existing field is reasonable and simple to define and easy to standardize. For example, in IPv4 and traditional MPLS networks, it is not suitable to carry new metadata and it is suggested to reuse the original bits such as DSCP as per [I-D.eckert-detnet-tcqlf]. The mapping from DSCP and the metadata such as queuing information MUST be provided in the controller plane.

### 5.2.2. New Common Data Fields

DSCP value may be not sufficient and hard to distinguish between the original DiffServ service and the deterministic service. The DetNet-specific metadata can also be encoded as a common data fields and the definition of data fields is independent from the encapsulating protocols. The data fields could be encapsulated into a variety of protocols, such as MPLS MNA [I-D.sxg-mpls-mna-deterministic-latency], IPv6 [I-D.xiong-detnet-6man-queuing-option] and SRv6 [I-D.xiong-detnet-spring-srh-extensions].

## 6. Security Considerations

Security considerations for DetNet are covered in the DetNet Architecture [RFC8655] and DetNet data plane [RFC8938], [RFC8939], [RFC8964] and DetNet security considerations [RFC9055]. The security considerations specified in [I-D.ietf-detnet-scaling-requirements] are also applicable to the procedures defined in this document.

## 7. IANA Considerations

IANA has defined a registry group named "DetNet Data Fields". This group includes the DetNet Option-Type registry. This registry defines code points for the DetNet Option-Type field for identifying DetNet-Option-Types. The following code points are defined in this document:

TBD1: DetNet Aggregation Option-Type

TBD2: DetNet Deterministic Latency Option-Type

## 8. Acknowledgements

The authors would like to acknowledge Peng Liu, Bin Tan for his thorough review and very helpful comments.

## 9. Informative References

[I-D.chen-detnet-sr-based-bounded-latency]

Chen, M., Geng, X., Li, Z., Joung, J., and J. Ryoo,  
"Segment Routing (SR) Based Bounded Latency", Work in  
Progress, Internet-Draft, draft-chen-detnet-sr-based-  
bounded-latency-03, 7 July 2023,  
<<https://datatracker.ietf.org/doc/html/draft-chen-detnet-sr-based-bounded-latency-03>>.

[I-D.eckert-detnet-glbfs]

Eckert, T. T., Clemm, A., Bryant, S., and S. Hommes,  
"Deterministic Networking (DetNet) Data Plane - guaranteed  
Latency Based Forwarding (gLBF) for bounded latency with  
low jitter and asynchronous forwarding in Deterministic  
Networks", Work in Progress, Internet-Draft, draft-eckert-  
detnet-glbfs-04, 3 March 2025,  
<<https://datatracker.ietf.org/doc/html/draft-eckert-detnet-glbfs-04>>.

[I-D.eckert-detnet-tcqs]

Eckert, T. T., Li, Y., Bryant, S., Malis, A. G., Ryoo, J.,  
Liu, P., Li, G., Ren, S., and F. Yang, "Deterministic  
Networking (DetNet) Data Plane - Tagged Cyclic Queuing and  
Forwarding (TCQF) for bounded latency with low jitter in  
large scale DetNets", Work in Progress, Internet-Draft,  
draft-eckert-detnet-tcqs-07, 3 March 2025,  
<<https://datatracker.ietf.org/doc/html/draft-eckert-detnet-tcqs-07>>.

[I-D.ietf-detnet-dataplane-taxonomy]

Joung, J., Geng, X., Peng, S., and T. T. Eckert,  
"Dataplane Enhancement Taxonomy", Work in Progress,  
Internet-Draft, draft-ietf-detnet-dataplane-taxonomy-03, 2  
March 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-detnet-dataplane-taxonomy-03>>.

[I-D.ietf-detnet-scaling-requirements]

Liu, P., Li, Y., Eckert, T. T., Xiong, Q., Ryoo, J., zhushiyin, and X. Geng, "Requirements for Scaling Deterministic Networks", Work in Progress, Internet-Draft, draft-ietf-detnet-scaling-requirements-08, 1 June 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-detnet-scaling-requirements-08>>.

[I-D.joung-detnet-stateless-fair-queuing]

Joung, J., Ryoo, J., Cheung, T., Li, Y., and P. Liu, "Latency Guarantee with Stateless Fair Queuing", Work in Progress, Internet-Draft, draft-joung-detnet-stateless-fair-queuing-05, 20 June 2025, <<https://datatracker.ietf.org/doc/html/draft-joung-detnet-stateless-fair-queuing-05>>.

[I-D.peng-detnet-deadline-based-forwarding]

Peng, S., Du, Z., Basu, K., Cheng, C., Yang, D., and C. Liu, "Deadline Based Deterministic Forwarding", Work in Progress, Internet-Draft, draft-peng-detnet-deadline-based-forwarding-17, 25 June 2025, <<https://datatracker.ietf.org/doc/html/draft-peng-detnet-deadline-based-forwarding-17>>.

[I-D.peng-detnet-packet-timeslot-mechanism]

Peng, S., Liu, P., Basu, K., Liu, A., Yang, D., and G. Peng, "Timeslot Queueing and Forwarding Mechanism", Work in Progress, Internet-Draft, draft-peng-detnet-packet-timeslot-mechanism-12, 24 June 2025, <<https://datatracker.ietf.org/doc/html/draft-peng-detnet-packet-timeslot-mechanism-12>>.

[I-D.sxg-mpls-mna-deterministic-latency]

Song, X., Xiong, Q., and R. Gandhi, "MPLS Network Action for Deterministic Latency", Work in Progress, Internet-Draft, draft-sxg-mpls-mna-deterministic-latency-03, 15 June 2025, <<https://datatracker.ietf.org/doc/html/draft-sxg-mpls-mna-deterministic-latency-03>>.

[I-D.xiong-detnet-6man-queuing-option]

Xiong, Q., Zhao, J., and R. Gandhi, "IPv6 Option for Scaling Deterministic Networks", Work in Progress, Internet-Draft, draft-xiong-detnet-6man-queuing-option-06, 1 July 2024, <<https://datatracker.ietf.org/doc/html/draft-xiong-detnet-6man-queuing-option-06>>.

[I-D.xiong-detnet-flow-aggregation]

Xiong, Q., Jiang, T., and J. Joung, "Flow Aggregation for Enhanced DetNet", Work in Progress, Internet-Draft, draft-xiong-detnet-flow-aggregation-02, 25 February 2025, <<https://datatracker.ietf.org/doc/html/draft-xiong-detnet-flow-aggregation-02>>.

[I-D.xiong-detnet-spring-srh-extensions]

Xiong, Q., Wu, H., and D. Yang, "Segment Routing Header Extensions for DetNet Data Fields", Work in Progress, Internet-Draft, draft-xiong-detnet-spring-srh-extensions-02, 1 July 2024, <<https://datatracker.ietf.org/doc/html/draft-xiong-detnet-spring-srh-extensions-02>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/rfc/rfc2119>>.

[RFC2212] Shenker, S., Partridge, C., and R. Guerin, "Specification of Guaranteed Quality of Service", RFC 2212, DOI 10.17487/RFC2212, September 1997, <<https://www.rfc-editor.org/rfc/rfc2212>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/rfc/rfc8174>>.

[RFC8655] Finn, N., Thubert, P., Varga, B., and J. Farkas, "Deterministic Networking Architecture", RFC 8655, DOI 10.17487/RFC8655, October 2019, <<https://www.rfc-editor.org/rfc/rfc8655>>.

[RFC8938] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., and S. Bryant, "Deterministic Networking (DetNet) Data Plane Framework", RFC 8938, DOI 10.17487/RFC8938, November 2020, <<https://www.rfc-editor.org/rfc/rfc8938>>.

[RFC8939] Varga, B., Ed., Farkas, J., Berger, L., Fedyk, D., and S. Bryant, "Deterministic Networking (DetNet) Data Plane: IP", RFC 8939, DOI 10.17487/RFC8939, November 2020, <<https://www.rfc-editor.org/rfc/rfc8939>>.

[RFC8964] Varga, B., Ed., Farkas, J., Berger, L., Malis, A., Bryant, S., and J. Korhonen, "Deterministic Networking (DetNet) Data Plane: MPLS", RFC 8964, DOI 10.17487/RFC8964, January 2021, <<https://www.rfc-editor.org/rfc/rfc8964>>.

- [RFC9055] Grossman, E., Ed., Mizrahi, T., and A. Hacker, "Deterministic Networking (DetNet) Security Considerations", RFC 9055, DOI 10.17487/RFC9055, June 2021, <<https://www.rfc-editor.org/rfc/rfc9055>>.
- [RFC9320] Finn, N., Le Boudec, J.-Y., Mohammadpour, E., Zhang, J., and B. Varga, "Deterministic Networking (DetNet) Bounded Latency", RFC 9320, DOI 10.17487/RFC9320, November 2022, <<https://www.rfc-editor.org/rfc/rfc9320>>.

## Authors' Addresses

Quan Xiong  
ZTE Corporation  
Email: [xiong.quan@zte.com.cn](mailto:xiong.quan@zte.com.cn)

Aihua Liu  
ZTE Corporation  
Email: [liu.aihua@zte.com.cn](mailto:liu.aihua@zte.com.cn)

Rakesh Gandhi  
Cisco Systems, Inc.  
Email: [rgandhi@cisco.com](mailto:rgandhi@cisco.com)

Dong Yang  
Beijing Jiaotong University  
Email: [dyang@bjtu.edu.cn](mailto:dyang@bjtu.edu.cn)