

Network Working Group
Internet-Draft
Updates: 8754 (if approved)
Intended status: Standards Track
Expires: 11 October 2026

A. Farrel
Old Dog Consulting
S. Krishnan
Cisco Systems, Inc.
9 April 2026

Clarifying SRv6 SID List Processing
draft-ietf-6man-sidlist-clarification-01

Abstract

Segment Routing over IPv6 (SRv6) is the instantiation of Segment Routing (SR) on the IPv6 data plane. Segments are indicated by Segment Identifiers (SIDs). SRv6 utilizes the Segment Routing Header (SRH), an IPv6 extension header, that includes a SID list indicating the sequence of segments and any additional processing to be performed.

This document updates RFC 8754 by clarifying the processing of SID list entries. It does not change any elements of the SRv6 architecture.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 11 October 2026.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document.

Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	2
2. Clarification	2
3. Updates to RFC 8754	3
3.1. Segments Left in Section 2 of RFC 8754	3
3.2. Segment List in Section 2 of RFC 8754	3
3.3. HMAC Processing in Section 2.1.2.1 of RFC 8754	6
3.4. SRH Processing in Section 4.3.1.1 of RFC 8754	6
3.5. ICMP Processing in Section 5.4 of RFC 8754	6
4. Operational Considerations	7
5. Security Considerations	7
6. IANA Considerations	7
Acknowledgments	7
Normative References	7
Informative References	8
Authors' Addresses	8

1. Introduction

The Segment Routing (SR) architecture is specified in [RFC8402]. SR forwards packets along a series of segments, and may perform additional segment-specific processing on packets. Segments are indicated by Segment Identifiers (SIDs).

The mechanisms to achieve Segment Routing for IPv6 (SRv6) include the use of the Segment Routing Header (SRH) [RFC8754] an IPv6 extension header that includes a SID list indicating the sequence of segments and any additional processing to be performed.

This document updates [RFC8754] by clarifying the processing of SID list entries. It does not change any elements of the SRv6 architecture.

2. Clarification

The SRH is processed per Section 4 of [RFC8754]. One objective is to determine the value to place in the Destination Address field of the IPv6 packet. To this end, the next entry in the SID list in the SRH is processed and mapped to the value to place in the Destination Address field.

The value placed in the 128-bit Destination Address field of an IPv6 packet header needs to be a routable IPv6 address since that is required for forwarding the packet.

Note that entries in the SID list do not need to be fully-formed IPv6 addresses that are copied direct to the Destination Address field of the IPv6 packet. The mapping from SID list entry could be a direct copy (the SID list contains a list of IPv6 addresses), or could involve a more complex function.

An example of such a function is shown in [RFC9800] where a REPLACE-CSID compressed SID is expanded to be placed in the Destination Address field.

3. Updates to RFC 8754

3.1. Segments Left in Section 2 of RFC 8754

The definition of the Segments Left field of the SRH is presented as:


| Segments Left: Defined in [RFC8200], Section 4.4.

This is clarified by Erratum Report EID 7102 (https://www.rfc-editor.org/errata_search.php?eid=7102). This clarification is included in this update for completeness. The new text reads:

| Segments Left: Defined in [RFC8200], Section 4.4. Specifically,
| for the SRH, the number of unprocessed 128-bit entries in the
| Segment List.

3.2. Segment List in Section 2 of RFC 8754

The figure in Section 2 of RFC 8754 reads:

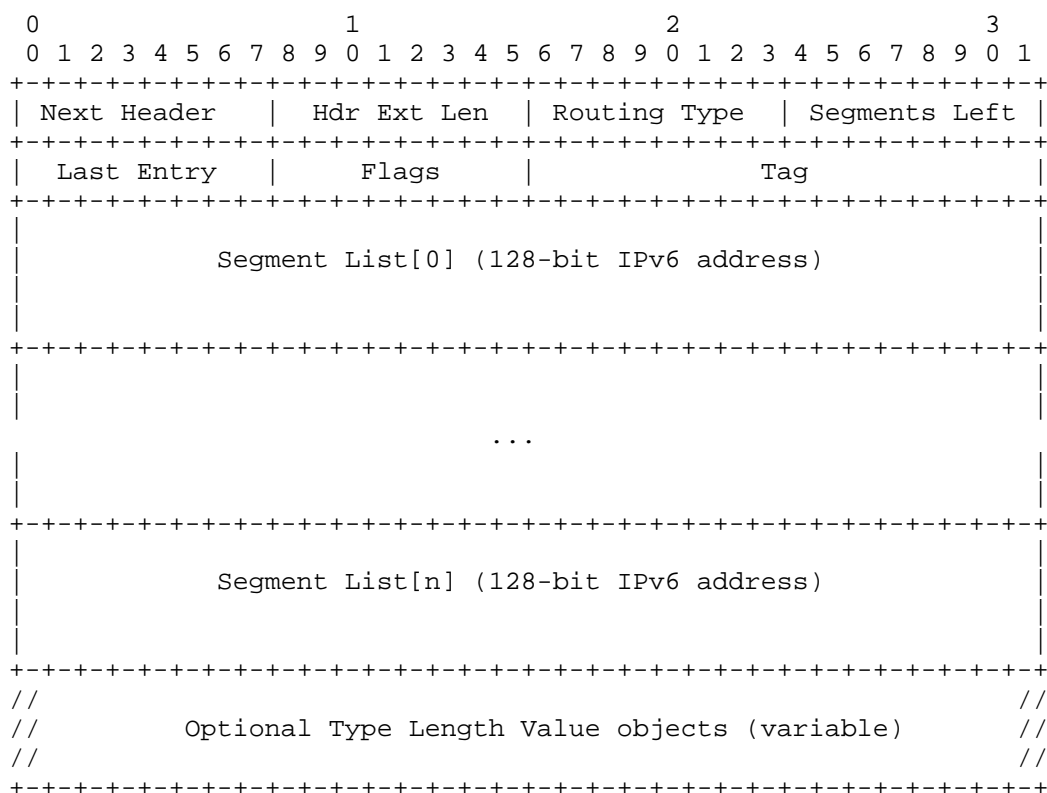

This is updated as follows to clarify that the entries in the Segment List are 128 bit entries, but not necessarily IPv6 addresses.

```

      0               1               2               3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+
| Next Header | Hdr Ext Len | Routing Type | Segments Left |
+-----+-----+-----+-----+
| Last Entry  | Flags       | Tag           |
+-----+-----+-----+-----+
|
| Segment List[0] (128-bit entry mapped to IPv6 addresses)
|
+-----+-----+-----+-----+
|
|                                     ...
|
+-----+-----+-----+-----+
|
| Segment List[n] (128-bit entry mapped to IPv6 addresses)
|
+-----+-----+-----+-----+
//                                     //
//           Optional Type Length Value objects (variable)           //
//                                     //
+-----+-----+-----+-----+

```

The text in RFC 8754 reads:

```

Segment List[0..n]: 128-bit IPv6 addresses representing the nth
segment in the Segment List. The Segment List is encoded
starting from the last segment of the SR Policy. That is, the
first element of the Segment List (Segment List[0]) contains
the last segment of the SR Policy, the second element contains
the penultimate segment of the SR Policy, and so on.

```

This is updated as follows to clarify that the entries in the Segment List are 128 bit entries, but not necessarily IPv6 addresses.

```

Segment List[0..n]: 128-bit entries representing the nth segment
in the Segment List. The Segment List is encoded starting from
the last segment of the SR Policy. That is, the first element
of the Segment List (Segment List[0]) contains the last segment
of the SR Policy, the second element contains the penultimate
segment of the SR Policy, and so on.

```

3.3. HMAC Processing in Section 2.1.2.1 of RFC 8754

In describing the HMAC processing, the text in RFC 8754 says that HMAC verification checks that the destination address of the packet matches that indicated by the next entry in the Segment List.

```
| * HMAC Segments Left is less than or equal to Last Entry, and the  
| destination address is equal to Segment List[Segments Left].
```

This is updated to allow a non-direct mapping from Segment List entry to destination address as follows:

```
| * HMAC Segments Left is less than or equal to Last Entry, and the  
| destination address is equal to the address created by mapping  
| from Segment List[Segments Left].
```

Further, in describing the concatenation of information to generate the text field input to the HMAC computation, this section says:

```
| * SRH: All addresses in the Segment List (variable octets)
```

This is updated as follows to indicate that Segment List entries are not necessarily IPv6 addresses.

```
| * SRH: All entries in the Segment List (variable octets)
```

3.4. SRH Processing in Section 4.3.1.1 of RFC 8754

The processing steps for a locally instantiated SRv6 SID include the following step:

```
| S16. Copy Segment List[Segments Left] from the SRH to the  
| destination address of the IPv6 header.
```

As explained earlier in this document, the function used to generate the destination address may be a copy, but may be some other function. Thus, this text is updated as follows:

```
| S16. Derive the destination address of the IPv6 header  
| from Segment List[Segments Left] in the SRH.
```

3.5. ICMP Processing in Section 5.4 of RFC 8754

The method for deriving the destination address of the invoking packet in RFC 8574 reads as:

```
| * The SID at Segment List[0] may be used as the destination  
| address of the invoking packet.
```

To allow for the 0th entry in the Segment List to be mapped rather than copied to a destination address, this is updated to:

```
| * The SID at Segment List[0] may be mapped to derive the  
| destination address of the invoking packet.
```

4. Operational Considerations

This document does not change any elements of the SR architecture and, as such, it makes no change to the operational procedures or management tools of SR.

In clarifying the nature of SID list processing, this document also clarifies the nature of SID list entries. Operational and management tools that examine the SID list in a packet need to be aware of the nature of those entries in order to offer maximal clarity to the users of those tools.

5. Security Considerations

This document makes no changes to the security properties of SRv6. See [I-D.ietf-spring-srv6-security] for more discussion of SRv6 security.

Note that describing the SID list entries as being mapped to the destination address of a packet enables potential additional security mechanisms.

6. IANA Considerations

This document makes no requests for IANA action.

Acknowledgments

Thanks to Eric Vyncke and Erik Kline for inspiring the authors to write this document. Thanks to Bob Hinden, Mohamed Boucadair, Joel Halpern, Yao Liu, Bruno Decraene, and Brian Carpenter for their reviews and comments that improved this document.

Normative References

[RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", RFC 8754, DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.

Informative References

- [I-D.ietf-spring-srv6-security] Buraglio, N., Mizrahi, T., tongtian124, Contreras, L. M., and F. Gont, "Segment Routing IPv6 Security Considerations", Work in Progress, Internet-Draft, draft-ietf-spring-srv6-security-13, 31 March 2026, <<https://datatracker.ietf.org/doc/html/draft-ietf-spring-srv6-security-13>>.
- [RFC8200] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", STD 86, RFC 8200, DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.
- [RFC9800] Cheng, W., Ed., Filsfils, C., Li, Z., Decraene, B., and F. Clad, Ed., "Compressed SRv6 Segment List Encoding", RFC 9800, DOI 10.17487/RFC9800, June 2025, <<https://www.rfc-editor.org/info/rfc9800>>.

Authors' Addresses

Adrian Farrel
Old Dog Consulting
United Kingdom
Email: adrian@olddog.co.uk

Suresh Krishnan
Cisco Systems, Inc.
United States of America
Email: suresh.krishnan@gmail.com