

CCAMP Working Group
Internet-Draft
Intended status: Standards Track
Expires: 28 November 2026

H. Zheng
I. Busi
Huawei Technologies
S. Belotti
V. Lopez
Nokia
Y. Xu
CAICT
27 May 2026

A YANG Data Model for Optical Transport Network (OTN) Tunnels and Label
Switched Paths
draft-ietf-ccamp-otn-tunnel-model-25

Abstract

This document describes the YANG data model for tunnels in OTN TE networks. The model can be used to do the configuration in order to establish the tunnel in OTN network. This work is independent with the control plane protocols.

About This Document

This note is to be removed before publishing as an RFC.

The latest revision of this draft can be found at <https://haomianzheng.github.io/IETF-ACTN-YANG-Model/draft-ietf-ccamp-otn-tunnel-model.html>. Status information for this document may be found at <https://datatracker.ietf.org/doc/draft-ietf-ccamp-otn-tunnel-model/>.

Discussion of this document takes place on the Common Control and Measurement Plane Working Group mailing list (<mailto:ccamp@ietf.org>), which is archived at <https://mailarchive.ietf.org/arch/browse/ccamp/>. Subscribe at <https://www.ietf.org/mailman/listinfo/ccamp/>.

Source for this draft and an issue tracker can be found at <https://github.com/haomianzheng/IETF-ACTN-YANG-Model>.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 28 November 2026.

Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. Introduction	3
1.1. Editorial Note (To be removed by RFC Editor)	3
1.2. Terminology and Notations	3
1.3. Tree Diagram	4
1.4. Prefix in Data Node Names	4
2. OTN Tunnel Model Description	4
2.1. Overview of OTN Tunnel Model	4
2.2. Bandwidth Augmentation	5
2.3. Label Augmentation	5
3. OTN Tunnel YANG Code	5
4. IANA Considerations	27
5. Security Considerations	27
6. References	30
6.1. Normative References	30
6.2. Informative References	31
Appendix A. OTN Tunnel YANG Tree	32
Acknowledgments	48
Contributors	48
Authors' Addresses	49

1. Introduction

OTN transport networks, specified in [ITU-T_G.709], can carry various types of client signals. In many cases, the client signal is carried over an OTN tunnel across connected domains in a multi-domain network.

This document provides YANG model for creating OTN tunnel. The model augments the generic TE Tunnel model specified in [I-D.ietf-teas-yang-te].

1.1. Editorial Note (To be removed by RFC Editor)

Note to the RFC Editor: This section is to be removed prior to publication.

This document contains placeholder values that need to be replaced with finalized values at the time of publication. This note summarizes all of the substitutions that are needed.

Please apply the following replacements:

- * XXXX --> the assigned RFC number for this I-D
- * YYYY --> the assigned RFC number fpr [I-D.ietf-ccamp-layer1-types]
- * ZZZZ --> the assigned RFC number for [I-D.ietf-teas-yang-te]
- * 2026-05-19 --> the actual date of the publication of this document

1.2. Terminology and Notations

Refer to [I-D.ietf-ccamp-otn-topo-yang] for the OTN specific terms terms used in this document.

The following terms are defined in [RFC7950] and are not redefined here:

- * client
- * server
- * augment
- * data model
- * data node

The following terms are defined in [RFC6241] and are not redefined here:

- * configuration data
- * state data

The terminology for describing YANG data models is found in [RFC7950].

1.3. Tree Diagram

A simplified graphical representation of the data model is used in Appendix A of this document. The meaning of the symbols in these diagrams is defined in [RFC8340].

1.4. Prefix in Data Node Names

In this document, names of data nodes and other data model objects are prefixed using the standard prefix associated with the corresponding YANG imported modules, as shown in the following table.

Prefix	YANG module	Reference
ll-types	ietf-layer1-types	[RFC YYYY]
otn-tnl	ietf-otn-tunnel	RFC XXXX
te	ietf-te	[RFC ZZZZ]

Table 1: Prefixes and corresponding YANG modules

2. OTN Tunnel Model Description

2.1. Overview of OTN Tunnel Model

This document aims to describe the data model for OTN tunnel. The OTN tunnel model is using TE tunnel [I-D.ietf-teas-yang-te] as a basic model and augments it with OTN-specific parameters, including the bandwidth information and label information. Figure 1 shows the augmentation relationship.

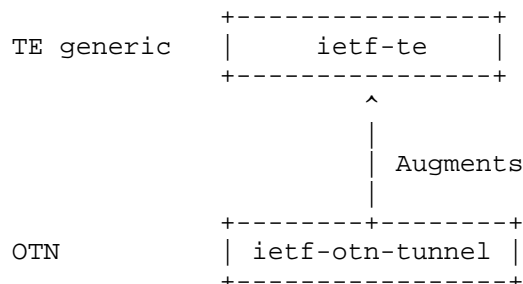


Figure 1: Relationship between OTN and TE tunnel models

It is also worth noting that the OTN tunnel provisioning is usually based on the OTN topology. Therefore the OTN tunnel model is usually used together with OTN topology model specified in [I-D.ietf-ccamp-otn-topo-yang]. The OTN tunnel model also imports a few type modules, including `ietf-layer1-types`, `ietf-te-types` and `ietf-inet-types`. The OTN-specific attributes in [RFC7139], including the Tributary Slot (TS) and Tributary Port Number (TPN), can be used to represent the bandwidth and label information. These attributes have been specified in [I-D.ietf-ccamp-layer1-types] and used in this document for augmentation of the generic TE tunnel model.

More scenarios and model applications can be found in [I-D.ietf-ccamp-transport-nbi-app-statement] and [I-D.ietf-teas-actn-yang].

2.2. Bandwidth Augmentation

The model augments all the occurrences of the `te-bandwidth` container with the OTN technology specific attributes using the `otn-link-bandwidth` and `otn-path-bandwidth` groupings defined in [I-D.ietf-ccamp-layer1-types].

2.3. Label Augmentation

The model augments all the occurrences of the `label-restriction` list with OTN technology specific attributes using the `otn-label-range-info` grouping defined in [I-D.ietf-ccamp-layer1-types].

Moreover, the model augments all the occurrences of the `te-label` container with the OTN technology specific attributes using the `otn-label-start-end`, `otn-label-hop` and `otn-label-step` groupings defined in [I-D.ietf-ccamp-layer1-types].

3. OTN Tunnel YANG Code

```
<CODE BEGINS> file "ietf-otn-tunnel@2026-05-19.yang"
module ietf-otn-tunnel {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-otn-tunnel";
  prefix otn-tnl;

  import ietf-te {
    prefix te;
    reference
      "RFC ZZZZ: A YANG Data Model for Traffic Engineering Tunnels
        and Interfaces.";
  }
  import ietf-layer1-types {
    prefix ll-types;
    reference
      "RFC YYYY: Common YANG Data Types for Layer 1 Networks.";
  }

  organization
    "IETF CCAMP Working Group";
  contact
    "WG Web:    <http://tools.ietf.org/wg/ccamp/>
    WG List:    <mailto:ccamp@ietf.org>

    Editor:     Haomian Zheng
                <mailto:zhenghaomian@huawei.com>

    Editor:     Italo Busi
                <mailto:italo.busi@huawei.com>

    Editor:     Sergio Belotti
                <mailto:sergio.belotti@nokia.com>

    Editor:     Victor Lopez
                <mailto:victor.lopez@nokia.com>

    Editor:     Yunbin Xu
                <mailto:xuyunbin@caict.ac.cn>";
  description
    "This module defines a model for OTN Tunnel Services.

    Copyright (c) 2026 IETF Trust and the persons identified as
    authors of the code. All rights reserved.

    Redistribution and use in source and binary forms, with or
    without modification, is permitted pursuant to, and subject to
    the license terms contained in, the Revised BSD License set
    forth in Section 4.c of the IETF Trust's Legal Provisions
```

Relating to IETF Documents
(<https://trustee.ietf.org/license-info>).

All revisions of IETF and IANA published modules can be found
at the YANG Parameters registry group
(<https://www.iana.org/assignments/yang-parameters>).

This version of this YANG module is part of RFC XXXX; see
the RFC itself for full legal notices.";

```
revision 2026-05-19 {
  description
    "Initial version";
  reference
    "RFC XXXX: A YANG Data Model for Optical Transport Network
      (OTN) Tunnels and Label Switched Paths";
}

/*
 * Data nodes
 */
/*
 * Augment TE bandwidth
 */

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/"
  + "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the named path constraint.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the tunnel.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:te-bandwidth/te:technology" {
  description
```

```
    "Augment TE bandwidth of the primary path.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of primary path's computed path
    properties.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the primary reverse path.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the primary reverse path's computed
    path properties.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:te-bandwidth/te:technology" {
  description
```

```

    "Augment TE bandwidth of the secondary path.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the secondary path's computed path
    properties.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-reverse-paths/"
+ "te:secondary-reverse-path/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the secondary reverse path.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-reverse-paths/"
+ "te:secondary-reverse-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:te-bandwidth/te:technology" {
  description
    "Augment TE bandwidth of the secondary reverse path's computed
    path properties.";
  case otn {
    uses ll-types:otn-path-bandwidth;
  }
}

/*
 * Augment TE label range information
 */

```

```
augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-in-segment/"
  + "te:label-restrictions/te:label-restriction" {
  description
    "Augment TE label range information for the ingress segment
    of the named path constraint.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-out-segment/"
  + "te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the egress segment
    of the named path constraint.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the ingress segment
    of the primary path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the egress segment
    of the primary path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:primary-reverse-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the ingress segment
    of the primary reverse path.";
  uses ll-types:otn-label-range-info;
```

```
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:primary-reverse-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the egress segment
    of the primary reverse path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the ingress segment
    of the secondary path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the egress segment
    of the secondary path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
    "Augment TE label range information for the ingress segment
    of the secondary reverse path.";
  uses ll-types:otn-label-range-info;
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction" {
  description
```

```
    "Augment TE label range information for the egress segment
    of the secondary reverse path.";
    uses ll-types:otn-label-range-info;
}

/*
 * Augment TE label.
 */

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/"
  + "te:explicit-route-objects/"
  + "te:route-object-exclude-always/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects always
    excluded by the path computation with the named path
    constraint.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/"
  + "te:explicit-route-objects/"
  + "te:route-object-include-exclude/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects included
    or excluded by the path computation with the named path
    constraint.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-in-segment/"
  + "te:label-restrictions/"
  + "te:label-restriction/te:label-start/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range start for the ingress segment
    of the named path constraint.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}
```

```
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-in-segment/"
  + "te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range end for the ingress segment
    of the named path constraint.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-in-segment/"
  + "te:label-restrictions/te:label-restriction/"
  + "te:label-step/te:technology" {
  description
    "Augment TE label range step for the ingress segment
    of the named path constraint.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-out-segment/"
  + "te:label-restrictions/"
  + "te:label-restriction/te:label-start/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range start for the egress segment
    of the named path constraint.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-out-segment/"
  + "te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range end for the egress segment
    of the named path constraint.";
```

```
    case otn {
      uses 11-types:otn-label-start-end;
    }
  }

augment "/te:te/te:globals/te:named-path-constraints/"
  + "te:named-path-constraint/te:path-out-segment/"
  + "te:label-restrictions/te:label-restriction/"
  + "te:label-step/te:technology" {
  description
    "Augment TE label range step for the egress segment
    of the named path constraint.";
  case otn {
    uses 11-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:optimizations/te:algorithm/te:metric/"
  + "te:optimization-metric/"
  + "te:explicit-route-exclude-objects/"
  + "te:route-object-exclude-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the optimization of the explicit
    route objects excluded by the path computation of the primary
    path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:optimizations/te:algorithm/te:metric/"
  + "te:optimization-metric/"
  + "te:explicit-route-include-objects/"
  + "te:route-object-include-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the optimization of the explicit
    route objects included by the path computation of the primary
    path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}
```

```
augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:explicit-route-objects/"
+ "te:route-object-exclude-always/te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects always
    excluded by the path computation of the primary path.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:explicit-route-objects/"
+ "te:route-object-include-exclude/te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects included
    or excluded by the path computation of the primary path.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-start/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range start for the ingress segment
    of the primary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-end/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range end for the ingress segment
    of the primary path.";
  case otn {
```

```

    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range step for the ingress segment
    of the primary path.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-start/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range start for the egress segment
    of the primary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range end for the egress segment
    of the primary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:primary-paths/te:primary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range end for the egress segment

```

```

        of the primary path.";
    case otn {
        uses ll-types:otn-label-step;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:path-route-objects/te:path-route-object/"
+ "te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
    description
        "Augment TE label hop for the route object of the computed
        primary path.";
    case otn {
        uses ll-types:otn-label-hop;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:optimizations/te:algorithm/te:metric/"
+ "te:optimization-metric/"
+ "te:explicit-route-exclude-objects/"
+ "te:route-object-exclude-object/te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
    description
        "Augment TE label hop for the optimization of the explicit
        route objects excluded by the path computation of the primary
        reverse path.";
    case otn {
        uses ll-types:otn-label-hop;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:optimizations/te:algorithm/te:metric/"
+ "te:optimization-metric/"
+ "te:explicit-route-include-objects/"
+ "te:route-object-include-object/te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
    description
        "Augment TE label hop for the optimization of the explicit

```

```
        route objects included by the path computation of the primary
        reverse path.";
    case otn {
        uses ll-types:otn-label-hop;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:explicit-route-objects/"
+ "te:route-object-exclude-always/"
+ "te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
    description
        "Augment TE label hop for the explicit route objects always
        excluded by the path computation of the primary reverse
        path.";
    case otn {
        uses ll-types:otn-label-hop;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:explicit-route-objects/"
+ "te:route-object-include-exclude/"
+ "te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
    description
        "Augment TE label hop for the explicit route objects included
        or excluded by the path computation of the primary reverse
        path.";
    case otn {
        uses ll-types:otn-label-hop;
    }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-start/"
+ "te:te-label/te:technology" {
    description
        "Augment TE label range start for the ingress segment
        of the primary reverse path.";
```

```

    case otn {
      uses ll-types:otn-label-start-end;
    }
  }

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-end/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range end for the ingress segment
    of the primary reverse path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range step for the ingress segment
    of the primary reverse path.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:path-out-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-start/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range start for the egress segment
    of the primary reverse path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"

```

```
+ "te:primary-reverse-path/"
+ "te:path-out-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-end/"
+ "te:te-label/te:technology" {
description
  "Augment TE label range end for the egress segment
  of the primary reverse path.";
case otn {
  uses ll-types:otn-label-start-end;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:path-out-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-step/te:technology" {
description
  "Augment TE label range step for the egress segment
  of the primary reverse path.";
case otn {
  uses ll-types:otn-label-step;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:primary-paths/te:primary-path/"
+ "te:primary-reverse-path/"
+ "te:computed-paths-properties/"
+ "te:computed-path-properties/te:path-properties/"
+ "te:path-route-objects/te:path-route-object/te:type/"
+ "te:label/te:label-hop/te:te-label/te:technology" {
description
  "Augment TE label hop for the route object of the computed
  primary reverse path.";
case otn {
  uses ll-types:otn-label-hop;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:optimizations/te:algorithm/te:metric/"
+ "te:optimization-metric/"
+ "te:explicit-route-exclude-objects/"
+ "te:route-object-exclude-object/te:type/te:label/"
+ "te:label-hop/te:te-label/te:technology" {
description
```

```
    "Augment TE label hop for the optimization of the explicit
    route objects excluded by the path computation of the
    secondary path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:optimizations/te:algorithm/te:metric/"
  + "te:optimization-metric/"
  + "te:explicit-route-include-objects/"
  + "te:route-object-include-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the optimization of the explicit
    route objects included by the path computation of the
    secondary path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:explicit-route-objects/"
  + "te:route-object-exclude-always/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects always
    excluded by the path computation of the secondary path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:explicit-route-objects/"
  + "te:route-object-include-exclude/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the explicit route objects included
    or excluded by the path computation of the secondary path.";
  case otn {
    uses 11-types:otn-label-hop;
  }
}
```

```
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-start/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range start for the ingress segment
    of the secondary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-end/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range end for the ingress segment
    of the secondary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:path-in-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range step for the ingress segment
    of the secondary path.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
+ "te:secondary-paths/te:secondary-path/"
+ "te:path-out-segment/te:label-restrictions/"
+ "te:label-restriction/te:label-start/"
+ "te:te-label/te:technology" {
  description
    "Augment TE label range start for the egress segment
    of the secondary path.";
```

```
    case otn {
      uses ll-types:otn-label-start-end;
    }
  }

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range end for the egress segment
    of the secondary path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range step for the egress segment
    of the secondary path.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-paths/te:secondary-path/"
  + "te:computed-paths-properties/"
  + "te:computed-path-properties/"
  + "te:path-properties/te:path-route-objects/"
  + "te:path-route-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the route object of the computed
    secondary path.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:optimizations/te:algorithm/te:metric/"
```

```
    + "te:optimization-metric/"
    + "te:explicit-route-exclude-objects/"
    + "te:route-object-exclude-object/te:type/te:label/"
    + "te:label-hop/te:te-label/te:technology" {
description
  "Augment TE label hop for the optimization of the explicit
  route objects excluded by the path computation of the
  secondary reverse path.";
case otn {
  uses ll-types:otn-label-hop;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:optimizations/te:algorithm/te:metric/"
  + "te:optimization-metric/"
  + "te:explicit-route-include-objects/"
  + "te:route-object-include-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
description
  "Augment TE label hop for the optimization of the explicit
  route objects included by the path computation of the
  secondary reverse path.";
case otn {
  uses ll-types:otn-label-hop;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:explicit-route-objects/"
  + "te:route-object-exclude-always/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
description
  "Augment TE label hop for the explicit route objects always
  excluded by the path computation of the secondary reverse
  path.";
case otn {
  uses ll-types:otn-label-hop;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:explicit-route-objects/"
  + "te:route-object-include-exclude/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
```

```

    description
      "Augment TE label hop for the explicit route objects included
      or excluded by the path computation of the secondary reverse
      path.";
    case otn {
      uses ll-types:otn-label-hop;
    }
  }

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-start/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range start for the ingress segment
    of the secondary reverse path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
  description
    "Augment TE label range end for the ingress segment
    of the secondary reverse path.";
  case otn {
    uses ll-types:otn-label-start-end;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-in-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-step/te:technology" {
  description
    "Augment TE label range step for the ingress segment
    of the secondary reverse path.";
  case otn {
    uses ll-types:otn-label-step;
  }
}

augment "/te:te/te:tunnels/te:tunnel/"

```

```

    + "te:secondary-reverse-paths/te:secondary-reverse-path/"
    + "te:path-out-segment/te:label-restrictions/"
    + "te:label-restriction/te:label-start/"
    + "te:te-label/te:technology" {
description
  "Augment TE label range start for the egress segment
  of the secondary reverse path.";
case otn {
  uses ll-types:otn-label-start-end;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-end/"
  + "te:te-label/te:technology" {
description
  "Augment TE label range end for the egress segment
  of the secondary reverse path.";
case otn {
  uses ll-types:otn-label-start-end;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:path-out-segment/te:label-restrictions/"
  + "te:label-restriction/te:label-step/te:technology" {
description
  "Augment TE label range step for the egress segment
  of the secondary reverse path.";
case otn {
  uses ll-types:otn-label-step;
}
}

augment "/te:te/te:tunnels/te:tunnel/"
  + "te:secondary-reverse-paths/te:secondary-reverse-path/"
  + "te:computed-paths-properties/"
  + "te:computed-path-properties/"
  + "te:path-properties/te:path-route-objects/"
  + "te:path-route-object/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
description
  "Augment TE label hop for the route object of the computed
  secondary reverse path.";
case otn {

```

```
    uses ll-types:otn-label-hop;
  }
}

augment "/te:te/te:lsps/"
  + "te:lsp/te:lsp-actual-route-information/"
  + "te:lsp-actual-route-information/te:type/te:label/"
  + "te:label-hop/te:te-label/te:technology" {
  description
    "Augment TE label hop for the record route of the LSP.";
  case otn {
    uses ll-types:otn-label-hop;
  }
}
}
<CODE ENDS>
```

Figure 2

4. IANA Considerations

IANA is requested to register the following URI in the "ns" registry within the "IETF XML Registry" group [RFC3688]:

URI: urn:ietf:params:xml:ns:yang:ietf-otn-tunnel
Registrant Contact: The IESG
XML: N/A; the requested URI is an XML namespace.

IANA is requested to register the following YANG module in the "YANG Module Names" registry [RFC6020] within the "YANG Parameters" registry group.

Name: ietf-otn-tunnel
Maintained by IANA? N
Namespace: urn:ietf:params:xml:ns:yang:ietf-otn-tunnel
Prefix: otn-tnl
Reference: RFC XXXX

5. Security Considerations

This section is modeled after the template described in Section 3.7 of [RFC9907].

The "ietf-otn-tunnel" YANG module defines a data model that is designed to be accessed via YANG-based management protocols, such as NETCONF [RFC6241] and RESTCONF [RFC8040]. These protocols have to use a secure transport layer (e.g., SSH [RFC4252], TLS [RFC8446], and QUIC [RFC9000]) and have to use mutual authentication.

The Network Configuration Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., config true, which is the default). These data nodes can be considered sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) to these data nodes without proper protection can have a negative effect on network operations. Specifically, the following subtrees and data nodes have particular sensitivities/vulnerabilities:

* "otnt:otn-bandwidth"

This subtree specifies the configurations of OTN technology-specific information under any occurrence of the tet:te-bandwidth container, as defined in [I-D.ietf-teas-yang-te] (e.g., "/te:te/te:tunnels/te:tunnel/te:te-bandwidth/te:technology/otnt:otn/otnt:otn-bandwidth"). By configuring the OTN bandwidth attributes, an attacker may create an unauthorized OTN traffic path. By removing or modifying it, a malicious attacker may cause OTN traffic to be disabled or misrouted.

* "otnt:otn-label-range"

This subtree specifies the configurations of OTN technology-specific label range information under any occurrence of the tet:label-restriction container, as defined in [I-D.ietf-teas-yang-te] (e.g., "/te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path/te:path-in-segment/te:label-restrictions/te:label-restriction/otnt:otn-label-range"). By configuring the OTN label range attributes, an attacker may create an unauthorized OTN traffic path. By removing or modifying, a malicious attacker may cause OTN traffic to be disabled or misrouted.

* "otnt:otn-label"

This subtree specifies the configurations of OTN technology-specific label information under any occurrence of the `tet:te-label` container, as defined in [I-D.ietf-teas-yang-te] (e.g., `/te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path/te:explicit-route-objects/te:route-object-include-exclude/te:type/te:label/te:label-hop/te:te-label/te:technology/otnt:otn/otnt:otn-label`). By configuring, removing or modifying the OTN label attributes, a malicious attacker may cause OTN traffic to be disabled or misrouted.

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via `get`, `get-config`, or `notification`) to these data nodes. Specifically, the following subtrees and data nodes have particular sensitivities/vulnerabilities:

* `"otnt:otn-bandwidth"`

This subtree specifies the configurations of OTN technology-specific information under any occurrence of the `tet:te-bandwidth` container, as defined in [I-D.ietf-teas-yang-te] (e.g., `/te:te/te:tunnels/te:tunnel/te:te-bandwidth/te:technology/otnt:otn/otnt:otn-bandwidth`). Unauthorized access to this data node can disclose the OTN bandwidth information of OTN tunnels and LSPs.

* `"otnt:otn-label-range"`

This subtree specifies the configurations of OTN technology-specific label range information under any occurrence of the `tet:label-restriction` container, as defined in [I-D.ietf-teas-yang-te] (e.g., `/te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path/te:path-in-segment/te:label-restrictions/te:label-restriction/otnt:otn-label-range`). Unauthorized access to this data node can disclose the state information of OTN tunnels and LSPs.

* `"otnt:otn-label"`

This subtree specifies the configurations of OTN technology-specific label information under any occurrence of the `te:te-label` container, as defined in [I-D.ietf-teas-yang-te] (e.g., `/te:te/te:tunnels/te:tunnel/te:primary-paths/te:primary-path/te:explicit-route-objects/te:route-object-include-exclude/te:type/te:label/te:label-hop/te:te-label/te:technology/otnt:otn/otnt:otn-label`). Unauthorized access to this data node can disclose the state information of OTN tunnels and LSPs.

This YANG module does not define RPC operations.

This YANG module uses groupings from other YANG modules that define nodes that may be considered sensitive or vulnerable in network environments. Refer to the Security Considerations of [I-D.ietf-ccamp-layer1-types] for information as to which nodes may be considered sensitive or vulnerable in network environments.

Finally, the YANG module described in this document augments the "ietf-te" YANG module [I-D.ietf-teas-yang-te] by adding data nodes. The security considerations for the subtrees described in those RFCs apply equally to the new data nodes that this module adds.

6. References

6.1. Normative References

[I-D.ietf-ccamp-layer1-types]

Zheng, H. and I. Busi, "Common YANG Data Types for Layer 1 Networks", Work in Progress, Internet-Draft, draft-ietf-ccamp-layer1-types-18, 23 February 2024, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-layer1-types-18>>.

[I-D.ietf-ccamp-otn-topo-yang]

Zheng, H., Busi, I., Liu, X., Belotti, S., and O. G. de Dios, "A YANG Data Model for Optical Transport Network Topology", Work in Progress, Internet-Draft, draft-ietf-ccamp-otn-topo-yang-20, 7 November 2024, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-otn-topo-yang-20>>.

[I-D.ietf-teas-yang-te]

Saad, T., Gandhi, R., Liu, X., Beeram, V. P., and I. Bryskin, "A YANG Data Model for Traffic Engineering Tunnels, Label Switched Paths, and Interfaces", Work in Progress, Internet-Draft, draft-ietf-teas-yang-te-44, 26 March 2026, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-yang-te-44>>.

[ITU-T_G.709]

ITU-T Recommendation G.709, "Interfaces for the optical transport network", ITU-T G.709 , March 2020.

[RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/rfc/rfc6020>>.

[RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/rfc/rfc6241>>.

[RFC7139] Zhang, F., Ed., Zhang, G., Belotti, S., Ceccarelli, D., and K. Pithewan, "GMPLS Signaling Extensions for Control of Evolving G.709 Optical Transport Networks", RFC 7139, DOI 10.17487/RFC7139, March 2014, <<https://www.rfc-editor.org/rfc/rfc7139>>.

[RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/rfc/rfc7950>>.

[RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, RFC 8341, DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/rfc/rfc8341>>.

6.2. Informative References

[I-D.ietf-ccamp-transport-nbi-app-statement]

Busi, I., King, D., Zheng, H., and Y. Xu, "Transport Northbound Interface Applicability Statement", Work in Progress, Internet-Draft, draft-ietf-ccamp-transport-nbi-app-statement-17, 10 July 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-ccamp-transport-nbi-app-statement-17>>.

[I-D.ietf-teas-actn-yang]

Lee, Y., Zheng, H., Ceccarelli, D., Yoon, B. Y., and S. Belotti, "Applicability of YANG models for Abstraction and Control of Traffic Engineered Networks", Work in Progress, Internet-Draft, draft-ietf-teas-actn-yang-11, 7 March 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-teas-actn-yang-11>>.

[RFC3688] Mealling, M., "The IETF XML Registry", BCP 81, RFC 3688, DOI 10.17487/RFC3688, January 2004, <<https://www.rfc-editor.org/rfc/rfc3688>>.

[RFC4252] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Authentication Protocol", RFC 4252, DOI 10.17487/RFC4252, January 2006, <<https://www.rfc-editor.org/rfc/rfc4252>>.

[RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/rfc/rfc8040>>.

[RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/rfc/rfc8340>>.

[RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/rfc/rfc8446>>.

[RFC9000] Iyengar, J., Ed. and M. Thomson, Ed., "QUIC: A UDP-Based Multiplexed and Secure Transport", RFC 9000, DOI 10.17487/RFC9000, May 2021, <<https://www.rfc-editor.org/rfc/rfc9000>>.

[RFC9907] Bierman, A., Boucadair, M., Ed., and Q. Wu, "Guidelines for Authors and Reviewers of Documents Containing YANG Data Models", BCP 216, RFC 9907, DOI 10.17487/RFC9907, March 2026, <<https://www.rfc-editor.org/rfc/rfc9907>>.

Appendix A. OTN Tunnel YANG Tree

This appendix presents the complete tree of the YANG data model defined in module "ietf-otn-tunnel.yang", defined in Section 3. See [RFC8340] for an explanation of the symbols used.

```
module: ietf-otn-tunnel
```

```
augment /te:te/te:globals/te:named-path-constraints
  /te:named-path-constraint/te:te-bandwidth/te:technology:
  +--:(otn)
    +--rw otn-bandwidth
    +--rw odu-type? identityref
    +--rw (oduflex-type)?
      +--:(generic)
        | +--rw nominal-bit-rate union
      +--:(cbr)
        | +--rw client-type identityref
      +--:(gfp-n-k)
        | +--rw gfp-n uint8
        | +--rw gfp-k? gfp-k
      +--:(flexe-client)
        | +--rw flexe-client flexe-client-rate
      +--:(flexe-aware)
        | +--rw flexe-aware-n uint16
      +--:(packet)
        +--rw opuflex-payload-rate union
  augment /te:te/te:tunnels/te:tunnel/te:te-bandwidth/te:technology:
    +--:(otn)
      +--rw otn-bandwidth
      +--rw odu-type? identityref
      +--rw (oduflex-type)?
        +--:(generic)
          | +--rw nominal-bit-rate union
        +--:(cbr)
          | +--rw client-type identityref
        +--:(gfp-n-k)
          | +--rw gfp-n uint8
          | +--rw gfp-k? gfp-k
        +--:(flexe-client)
          | +--rw flexe-client flexe-client-rate
        +--:(flexe-aware)
          | +--rw flexe-aware-n uint16
        +--:(packet)
          +--rw opuflex-payload-rate union
  augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:te-bandwidth/te:technology:
    +--:(otn)
      +--rw otn-bandwidth
      +--rw odu-type? identityref
      +--rw (oduflex-type)?
        +--:(generic)
          | +--rw nominal-bit-rate union
        +--:(cbr)
```

```

    |   +-rw client-type           identityref
  +--:(gfp-n-k)
    |   +-rw gfp-n                uint8
    |   +-rw gfp-k?              gfp-k
  +--:(flexe-client)
    |   +-rw flexe-client         flexe-client-rate
  +--:(flexe-aware)
    |   +-rw flexe-aware-n        uint16
  +--:(packet)
    +-rw opuflex-payload-rate     union
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
      /te:primary-path/te:computed-paths-properties
      /te:computed-path-properties/te:path-properties
      /te:te-bandwidth/te:technology:
+--:(otn)
  +--ro otn-bandwidth
  +--ro odu-type?                 identityref
  +--ro (oduflex-type)?
  +--:(generic)
  |   +-ro nominal-bit-rate       union
  +--:(cbr)
  |   +-ro client-type           identityref
  +--:(gfp-n-k)
  |   +-ro gfp-n                 uint8
  |   +-ro gfp-k?               gfp-k
  +--:(flexe-client)
  |   +-ro flexe-client          flexe-client-rate
  +--:(flexe-aware)
  |   +-ro flexe-aware-n         uint16
  +--:(packet)
  +-ro opuflex-payload-rate       union
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
      /te:primary-path/te:primary-reverse-path/te:te-bandwidth
      /te:technology:
+--:(otn)
  +--rw otn-bandwidth
  +--rw odu-type?                 identityref
  +--rw (oduflex-type)?
  +--:(generic)
  |   +--rw nominal-bit-rate      union
  +--:(cbr)
  |   +--rw client-type          identityref
  +--:(gfp-n-k)
  |   +--rw gfp-n                uint8
  |   +--rw gfp-k?              gfp-k
  +--:(flexe-client)
  |   +--rw flexe-client         flexe-client-rate
  +--:(flexe-aware)

```

```

        |   +--rw flexe-aware-n          uint16
      +---:(packet)
        +--rw opuflex-payload-rate      union
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
      /te:primary-path/te:primary-reverse-path
      /te:computed-paths-properties/te:computed-path-properties
      /te:path-properties/te:te-bandwidth/te:technology:
+---:(otn)
  +--ro otn-bandwidth
    +--ro odu-type?                      identityref
    +--ro (oduflex-type)?
      +---:(generic)
        |   +--ro nominal-bit-rate      union
      +---:(cbr)
        |   +--ro client-type            identityref
      +---:(gfp-n-k)
        |   +--ro gfp-n                  uint8
        |   +--ro gfp-k?                 gfp-k
      +---:(flexe-client)
        |   +--ro flexe-client            flexe-client-rate
      +---:(flexe-aware)
        |   +--ro flexe-aware-n          uint16
      +---:(packet)
        +--ro opuflex-payload-rate      union
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
      /te:secondary-path/te:te-bandwidth/te:technology:
+---:(otn)
  +--rw otn-bandwidth
    +--rw odu-type?                      identityref
    +--rw (oduflex-type)?
      +---:(generic)
        |   +--rw nominal-bit-rate      union
      +---:(cbr)
        |   +--rw client-type            identityref
      +---:(gfp-n-k)
        |   +--rw gfp-n                  uint8
        |   +--rw gfp-k?                 gfp-k
      +---:(flexe-client)
        |   +--rw flexe-client            flexe-client-rate
      +---:(flexe-aware)
        |   +--rw flexe-aware-n          uint16
      +---:(packet)
        +--rw opuflex-payload-rate      union
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
      /te:secondary-path/te:computed-paths-properties
      /te:computed-path-properties/te:path-properties
      /te:te-bandwidth/te:technology:
+---:(otn)

```

```

    +--ro otn-bandwidth
      +--ro odu-type?                               identityref
      +--ro (oduflex-type)?
        +--:(generic)
          | +--ro nominal-bit-rate                   union
        +--:(cbr)
          | +--ro client-type                         identityref
        +--:(gfp-n-k)
          | +--ro gfp-n                               uint8
          | +--ro gfp-k?                             gfp-k
        +--:(flexe-client)
          | +--ro flexe-client                       flexe-client-rate
        +--:(flexe-aware)
          | +--ro flexe-aware-n                       uint16
        +--:(packet)
          +--ro opuflex-payload-rate                 union
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
      /te:secondary-reverse-path/te:te-bandwidth/te:technology:
+--:(otn)
  +--rw otn-bandwidth
    +--rw odu-type?                               identityref
    +--rw (oduflex-type)?
      +--:(generic)
        | +--rw nominal-bit-rate                   union
      +--:(cbr)
        | +--rw client-type                         identityref
      +--:(gfp-n-k)
        | +--rw gfp-n                               uint8
        | +--rw gfp-k?                             gfp-k
      +--:(flexe-client)
        | +--rw flexe-client                       flexe-client-rate
      +--:(flexe-aware)
        | +--rw flexe-aware-n                       uint16
      +--:(packet)
        +--rw opuflex-payload-rate                 union
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
      /te:secondary-reverse-path/te:computed-paths-properties
      /te:computed-path-properties/te:path-properties
      /te:te-bandwidth/te:technology:
+--:(otn)
  +--ro otn-bandwidth
    +--ro odu-type?                               identityref
    +--ro (oduflex-type)?
      +--:(generic)
        | +--ro nominal-bit-rate                   union
      +--:(cbr)
        | +--ro client-type                         identityref
      +--:(gfp-n-k)

```

```

        |   +--ro gfp-n                               uint8
        |   +--ro gfp-k?                             gfp-k
        +---:(flexe-client)
        |   +--ro flexe-client                       flexe-client-rate
        +---:(flexe-aware)
        |   +--ro flexe-aware-n                       uint16
        +---:(packet)
            +--ro opuflex-payload-rate               union
augment /te:te/te:globals/te:named-path-constraints
        /te:named-path-constraint/te:path-in-segment
        /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
  +--rw range-type?      otn-label-range-type
  +--rw tsg?             identityref
  +--rw odu-type-list*   identityref
  +--rw priority?        uint8
augment /te:te/te:globals/te:named-path-constraints
        /te:named-path-constraint/te:path-out-segment
        /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
  +--rw range-type?      otn-label-range-type
  +--rw tsg?             identityref
  +--rw odu-type-list*   identityref
  +--rw priority?        uint8
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-in-segment/te:label-restrictions
        /te:label-restriction:
+--rw otn-label-range
  +--rw range-type?      otn-label-range-type
  +--rw tsg?             identityref
  +--rw odu-type-list*   identityref
  +--rw priority?        uint8
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
  +--rw range-type?      otn-label-range-type
  +--rw tsg?             identityref
  +--rw odu-type-list*   identityref
  +--rw priority?        uint8
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:primary-reverse-path
        /te:path-in-segment/te:label-restrictions
        /te:label-restriction:
+--rw otn-label-range
  +--rw range-type?      otn-label-range-type
  +--rw tsg?             identityref
  +--rw odu-type-list*   identityref

```

```

    +--rw priority?          uint8
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path
    /te:path-out-segment/te:label-restrictions
    /te:label-restriction:
+--rw otn-label-range
    +--rw range-type?       otn-label-range-type
    +--rw tsg?              identityref
    +--rw odu-type-list*    identityref
    +--rw priority?         uint8
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
    /te:secondary-path/te:path-in-segment
    /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
    +--rw range-type?       otn-label-range-type
    +--rw tsg?              identityref
    +--rw odu-type-list*    identityref
    +--rw priority?         uint8
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
    /te:secondary-path/te:path-out-segment
    /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
    +--rw range-type?       otn-label-range-type
    +--rw tsg?              identityref
    +--rw odu-type-list*    identityref
    +--rw priority?         uint8
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
    /te:secondary-reverse-path/te:path-in-segment
    /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
    +--rw range-type?       otn-label-range-type
    +--rw tsg?              identityref
    +--rw odu-type-list*    identityref
    +--rw priority?         uint8
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
    /te:secondary-reverse-path/te:path-out-segment
    /te:label-restrictions/te:label-restriction:
+--rw otn-label-range
    +--rw range-type?       otn-label-range-type
    +--rw tsg?              identityref
    +--rw odu-type-list*    identityref
    +--rw priority?         uint8
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:explicit-route-objects
    /te:route-object-exclude-always/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
    +--rw otn-label

```

```

    +--rw tpn?          otn-tpn
    +--rw tsg?          identityref
    +--rw ts-list?      string
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:explicit-route-objects
    /te:route-object-include-exclude/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw tsg?          identityref
    +--rw ts-list?      string
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:path-in-segment
    /te:label-restrictions/te:label-restriction
    /te:label-start/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw ts?           otn-ts
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:path-in-segment
    /te:label-restrictions/te:label-restriction/te:label-end
    /te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw ts?           otn-ts
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:path-in-segment
    /te:label-restrictions/te:label-restriction/te:label-step
    /te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?          otn-tpn
    +--rw ts?           otn-ts
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:path-out-segment
    /te:label-restrictions/te:label-restriction
    /te:label-start/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw ts?           otn-ts
augment /te:te/te:globals/te:named-path-constraints
    /te:named-path-constraint/te:path-out-segment
    /te:label-restrictions/te:label-restriction/te:label-end
    /te:te-label/te:technology:

```

```

+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:globals/te:named-path-constraints
  /te:named-path-constraint/te:path-out-segment
  /te:label-restrictions/te:label-restriction/te:label-step
  /te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:optimizations/te:algorithm/te:metric
  /te:optimization-metric/te:explicit-route-exclude-objects
  /te:route-object-exclude-object/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn
    +--rw tsg?    identityref
    +--rw ts-list? string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:optimizations/te:algorithm/te:metric
  /te:optimization-metric/te:explicit-route-include-objects
  /te:route-object-include-object/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn
    +--rw tsg?    identityref
    +--rw ts-list? string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:explicit-route-objects
  /te:route-object-exclude-always/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn
    +--rw tsg?    identityref
    +--rw ts-list? string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:explicit-route-objects
  /te:route-object-include-exclude/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn

```

```

        +--rw tsg?          identityref
        +--rw ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-in-segment/te:label-restrictions
        /te:label-restriction/te:label-start/te:te-label
        /te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?        otn-tpn
        +--rw ts?         otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-in-segment/te:label-restrictions
        /te:label-restriction/te:label-end/te:te-label
        /te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?        otn-tpn
        +--rw ts?         otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-in-segment/te:label-restrictions
        /te:label-restriction/te:label-step/te:technology:
+---:(otn)
    +--rw otn-label-step
        +--rw tpn?        otn-tpn
        +--rw ts?         otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction
        /te:label-start/te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?        otn-tpn
        +--rw ts?         otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction/te:label-end
        /te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?        otn-tpn
        +--rw ts?         otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
        /te:primary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction/te:label-step
        /te:technology:
+---:(otn)
    +--rw otn-label-step
        +--rw tpn?        otn-tpn

```

```

    +--rw ts?      otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:computed-paths-properties
    /te:computed-path-properties/te:path-properties
    /te:path-route-objects/te:path-route-object/te:type
    /te:label/te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--ro otn-label
    +--ro tpn?      otn-tpn
    +--ro tsg?      identityref
    +--ro ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path/te:optimizations
    /te:algorithm/te:metric/te:optimization-metric
    /te:explicit-route-exclude-objects
    /te:route-object-exclude-object/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path/te:optimizations
    /te:algorithm/te:metric/te:optimization-metric
    /te:explicit-route-include-objects
    /te:route-object-include-object/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path
    /te:explicit-route-objects/te:route-object-exclude-always
    /te:type/te:label/te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path
    /te:explicit-route-objects
    /te:route-object-include-exclude/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)

```

```

    +--rw otn-label
      +--rw tpn?      otn-tpn
      +--rw tsg?      identityref
      +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:primary-reverse-path
  /te:path-in-segment/te:label-restrictions
  /te:label-restriction/te:label-start/te:te-label
  /te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:primary-reverse-path
  /te:path-in-segment/te:label-restrictions
  /te:label-restriction/te:label-end/te:te-label
  /te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:primary-reverse-path
  /te:path-in-segment/te:label-restrictions
  /te:label-restriction/te:label-step/te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:primary-reverse-path
  /te:path-out-segment/te:label-restrictions
  /te:label-restriction/te:label-start/te:te-label
  /te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
  /te:primary-path/te:primary-reverse-path
  /te:path-out-segment/te:label-restrictions
  /te:label-restriction/te:label-end/te:te-label
  /te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts

```

```

augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path
    /te:path-out-segment/te:label-restrictions
    /te:label-restriction/te:label-step/te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:primary-paths
    /te:primary-path/te:primary-reverse-path
    /te:computed-paths-properties/te:computed-path-properties
    /te:path-properties/te:path-route-objects
    /te:path-route-object/te:type/te:label/te:label-hop
    /te:te-label/te:technology:
+--:(otn)
  +--ro otn-label
    +--ro tpn?          otn-tpn
    +--ro ts?           identityref
    +--ro ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
    /te:secondary-path/te:optimizations/te:algorithm
    /te:metric/te:optimization-metric
    /te:explicit-route-exclude-objects
    /te:route-object-exclude-object/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw ts?           identityref
    +--rw ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
    /te:secondary-path/te:optimizations/te:algorithm
    /te:metric/te:optimization-metric
    /te:explicit-route-include-objects
    /te:route-object-include-object/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn
    +--rw ts?           identityref
    +--rw ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
    /te:secondary-path/te:explicit-route-objects
    /te:route-object-exclude-always/te:type/te:label
    /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?          otn-tpn

```

```

        +--rw tsg?          identityref
        +--rw ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:explicit-route-objects
        /te:route-object-include-exclude/te:type/te:label
        /te:label-hop/te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?          otn-tpn
        +--rw tsg?          identityref
        +--rw ts-list?      string
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:path-in-segment
        /te:label-restrictions/te:label-restriction
        /te:label-start/te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?          otn-tpn
        +--rw ts?           otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:path-in-segment
        /te:label-restrictions/te:label-restriction/te:label-end
        /te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?          otn-tpn
        +--rw ts?           otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:path-in-segment
        /te:label-restrictions/te:label-restriction/te:label-step
        /te:technology:
+---:(otn)
    +--rw otn-label-step
        +--rw tpn?          otn-tpn
        +--rw ts?           otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction
        /te:label-start/te:te-label/te:technology:
+---:(otn)
    +--rw otn-label
        +--rw tpn?          otn-tpn
        +--rw ts?           otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
        /te:secondary-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction/te:label-end
        /te:te-label/te:technology:
+---:(otn)

```

```

    +--rw otn-label
      +--rw tpn?    otn-tpn
      +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
  /te:secondary-path/te:path-out-segment
  /te:label-restrictions/te:label-restriction/te:label-step
  /te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-paths
  /te:secondary-path/te:computed-paths-properties
  /te:computed-path-properties/te:path-properties
  /te:path-route-objects/te:path-route-object/te:type
  /te:label/te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--ro otn-label
    +--ro tpn?      otn-tpn
    +--ro tsg?      identityref
    +--ro ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:optimizations/te:algorithm
  /te:metric/te:optimization-metric
  /te:explicit-route-exclude-objects
  /te:route-object-exclude-object/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:optimizations/te:algorithm
  /te:metric/te:optimization-metric
  /te:explicit-route-include-objects
  /te:route-object-include-object/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:explicit-route-objects
  /te:route-object-exclude-always/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)

```

```

    +--rw otn-label
      +--rw tpn?      otn-tpn
      +--rw tsg?      identityref
      +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:explicit-route-objects
  /te:route-object-include-exclude/te:type/te:label
  /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw tsg?      identityref
    +--rw ts-list?  string
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:path-in-segment
  /te:label-restrictions/te:label-restriction
  /te:label-start/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:path-in-segment
  /te:label-restrictions/te:label-restriction/te:label-end
  /te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:path-in-segment
  /te:label-restrictions/te:label-restriction/te:label-step
  /te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:path-out-segment
  /te:label-restrictions/te:label-restriction
  /te:label-start/te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?      otn-tpn
    +--rw ts?       otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
  /te:secondary-reverse-path/te:path-out-segment
  /te:label-restrictions/te:label-restriction/te:label-end

```

```

        /te:te-label/te:technology:
+--:(otn)
  +--rw otn-label
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
        /te:secondary-reverse-path/te:path-out-segment
        /te:label-restrictions/te:label-restriction/te:label-step
        /te:technology:
+--:(otn)
  +--rw otn-label-step
    +--rw tpn?    otn-tpn
    +--rw ts?     otn-ts
augment /te:te/te:tunnels/te:tunnel/te:secondary-reverse-paths
        /te:secondary-reverse-path/te:computed-paths-properties
        /te:computed-path-properties/te:path-properties
        /te:path-route-objects/te:path-route-object/te:type
        /te:label/te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--ro otn-label
    +--ro tpn?          otn-tpn
    +--ro tsg?          identityref
    +--ro ts-list?     string
augment /te:te/te:lsps/te:lsp/te:lsp-actual-route-information
        /te:lsp-actual-route-information/te:type/te:label
        /te:label-hop/te:te-label/te:technology:
+--:(otn)
  +--ro otn-label
    +--ro tpn?          otn-tpn
    +--ro tsg?          identityref
    +--ro ts-list?     string

```

Figure 3

Acknowledgments

We would like to thank Yu Chaode for his comments and discussions.

Contributors

Aihua Guo
 Futurewei
 Email: aihuaguo.ietf@gmail.com

Anurag Sharma
 Google
 Email: ansha@google.com

Rajan Rao
Infinera
Email: rrao@infinera.com

Yunbo Li
China Mobile
Email: liyunbo@chinamobile.com

Dieter Beller
Nokia
Email: dieter.beller@nokia.com

Yanlei Zheng
China Unicom
Email: zhengyanlei@chinaunicom.cn

Xian Zhang
Huawei Technologies
Email: Huawei Technologies

Lei Wang
China Mobile
Email: wangleiyj@chinamobile.com

Oscar Gonzalez de Dios
Telefonica
Email: oscar.gonzalezdedios@telefonica.com

Authors' Addresses

Haomian Zheng
Huawei Technologies
H1, Huawei Xiliu Beipo Village, Songshan Lake
Dongguan
Guangdong, 523808
China
Email: zhenghaomian@huawei.com

Italo Busi
Huawei Technologies

Email: italo.busi@huawei.com

Sergio Belotti

Nokia

Email: sergio.belotti@nokia.com

Victor Lopez

Nokia

Email: victor.lopez@nokia.com

Yunbin Xu

CAICT

Email: xuyunbin@caict.ac.cn