

Network Working Group  
Internet-Draft  
Obsoletes: 8347 (if approved)  
Intended status: Standards Track  
Expires: 17 August 2026

A. Lindem, Ed.  
Arrcus, Inc.  
X. Liu  
Individual  
A. Kyparlis  
Jabil  
R. Parikh  
Zoox  
M. Zhang  
China Tower  
13 February 2026

A YANG Data Model for the Virtual Router Redundancy Protocol (VRRP)  
draft-ietf-rtgwg-vrrp-rfc8347bis-15

## Abstract

This document describes a YANG data model for the Virtual Router Redundancy Protocol (VRRP). Both versions 2 and 3 of VRRP are covered.

The VRRP terminology has been updated to conform to inclusive language guidelines for IETF technologies.

This document obsoletes RFC 8347.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 17 August 2026.

## Copyright Notice

Copyright (c) 2026 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

1. Introduction . . . . .	2
1.1. Changes from RFC 8347 . . . . .	3
1.2. Terminology . . . . .	4
1.3. Tree Diagrams . . . . .	4
1.4. Prefixes in Data Node Names . . . . .	5
2. Design of the Data Model . . . . .	5
2.1. Scope of the Model . . . . .	5
2.2. Relationships with the Interface Model and IP Model . . . . .	5
2.3. Protocol Configuration . . . . .	6
2.4. Protocol States . . . . .	8
2.5. Notifications . . . . .	10
3. Tree Structure . . . . .	11
4. YANG Module . . . . .	14
5. IANA Considerations . . . . .	37
6. Operations and Management Considerations . . . . .	37
6.1. Migration Path . . . . .	37
7. Security Considerations . . . . .	38
8. Acknowledgments . . . . .	39
9. Normative References . . . . .	39
10. Informative References . . . . .	40
Appendix A. Data Tree Example . . . . .	41
Authors' Addresses . . . . .	45

## 1. Introduction

This document introduces a YANG data model [RFC7950] for the Virtual Router Redundancy Protocol (VRRP) [RFC3768], [RFC9568]. VRRP provides higher resiliency by specifying an election protocol that dynamically assigns responsibility for a virtual router to one of the VRRP routers on a LAN.

The YANG module specified in this document supports both versions 2 and 3 of VRRP. VRRP version 2 (defined in [RFC3768]) supports IPv4. VRRP version 3 (defined in [RFC9568]) supports both IPv4 and IPv6.

The VRRP terminology has been updated to conform to inclusive language guidelines for IETF technologies. This document obsoletes VRRP Version 3 [RFC8347].

### 1.1. Changes from RFC 8347

The following changes have been made consistent with IETF inclusive language guidelines:

- \* The typedef "new-master-reason-type" was changed to "new-active-reason-type". The associated descriptive text was also updated.
- \* The enum "not-master" was changed to "not-active". The associated descriptive text was also updated.
- \* The descriptive text for enum "preempted" was updated.
- \* The descriptive text for enum "no-response" was updated.
- \* The identity "vrrp-event-master-timeout" was changed to "vrrp-event-active-timeout". The associated descriptive text was also updated.
- \* The identity "vrrp-event-lower-priority-master" was changed to "vrrp-event-lower-priority-active". The associated descriptive text was also updated.
- \* The descriptive text for identity "vrrp-event-higher-priority-backup" was updated.
- \* The descriptive text for identify "vrrp-event-owner-preempt" was updated.
- \* The descriptive text for identity "backup" was updated.
- \* The identity "master" was changed to "active". The associated descriptive text was also updated.
- \* The descriptive text for container "preempt" was updated.
- \* The descriptive text for leaf "hold-time" was updated.
- \* The descriptive text for leaf "accept-mode" was updated.
- \* The leaf "master-down-interval" was changed to "active-down-interval". The associated descriptive text was also updated.

- \* The leaf "new-master-reason" was changed to "new-active-reason". The associated descriptive text was also updated.
- \* The leaf "new-master-reason" was changed to "new-active-reason". The associated descriptive text was also updated.
- \* The leaf "master-transitions" was changed to "active-transitions". The associated descriptive text was also updated.
- \* The notification "vrrp-new-master-event" was changed to "vrrp-new-active-event". The associated descriptive text was also updated.
- \* The notification leaf "master-ip-address" was changed to "active-ip-address". The associated descriptive text was also updated.
- \* The notification leaf "new-master-reason" was changed to "new-active-reason". The associated descriptive text was also updated.

The following additions have been made to the ietf-vrrp module:

- \* The leaf "effective-priority" was add to the grouping "grouping vrrp-state-attributes" to reflect the effective priority due to the VRRP router owning the address or any local policy adjusting the priority.

## 1.2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

The following terms are defined in [RFC7950] and are not redefined here:

- \* augment
- \* data node

## 1.3. Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams is defined in [RFC8340].

#### 1.4. Prefixes in Data Node Names

In this document, names of data nodes, actions, and other data model objects are often used without a prefix, as long as it is clear from the context in which YANG module each name is defined. Otherwise, names are prefixed using the standard prefix associated with the corresponding YANG module, as shown in Table 1.

Prefix	YANG module	Reference
yang	ietf-yang-types	[RFC9911]
inet	ietf-inet-types	[RFC9911]
if	ietf-interfaces	[RFC8343]
ip	ietf-ip	[RFC8344]

Table 1: Prefixes and Corresponding  
YANG Modules

## 2. Design of the Data Model

### 2.1. Scope of the Model

The model covers VRRP version 2 [RFC3768] and VRRP version 3 [RFC9568]. The model is designed to be implemented on a device where VRRP version 2 or 3 is implemented. With the help of a proper management protocol, the defined model can be used to:

- \* Configure VRRP version 2 or 3.
- \* Manage the protocol operational behavior.
- \* Retrieve the protocol operational status.
- \* Receive the protocol notifications.

### 2.2. Relationships with the Interface Model and IP Model

This model augments the interface data model "ietf-interfaces" [RFC8343] and the IP management model "ietf-ip" [RFC8344]. The augmentation relationships are shown as follows:

```

module: ietf-interfaces
  +--rw interfaces
    +--rw interface* [name]
      ...
      +--rw ip:ipv4!
      | +--rw ip:address* [ip]
      |   ...
      |   +--rw vrrp:vrrp
      |   | +--rw vrrp:vrrp-instance* [vrid]
      |   | +--rw vrrp:vrid                               uint8
      |   | +--rw vrrp:virtual-ipv4-addresses
      |   |   ...
      |   +--rw ip:ipv6!
      |   +--rw ip:address* [ip]
      |   ...
      |   +--rw vrrp:vrrp
      |   | +--rw vrrp:vrrp-instance* [vrid]
      |   | +--rw vrrp:vrid                               uint8
      |   | +--rw vrrp:virtual-ipv6-addresses
      |   |   ...
      |   ...

```

Figure 1

In Figure 1, a tree node without a prefix is from the model "ietf-interfaces". A tree node with prefix "ip" is from the model "ietf-ip". A tree node with prefix "vrrp" is from the VRRP model specified in this document.

The "vrrp" container contains a list of "vrrp-instance" nodes, which are instantiated under an interface for a specified address family (IPv4 or IPv6).

Each "vrrp-instance" node represents a VRRP router state machine, as described in Section 6.4 of [RFC9568], providing the configuration and state information for the election process of a virtual router. The IP addresses on the augmented interface are the real addresses through which the VRRP router operates. The IPv4 or IPv6 address or addresses associated with a virtual router (described in Section 1 of [RFC9568]) are modeled as a list of IPv4 or IPv6 addresses under the "vrrp-instance".

### 2.3. Protocol Configuration

The model structure for the protocol configuration is depicted in Figure 2.

```

augment /if:interfaces/if:interface/ip:ipv4:
  +--rw vrrp
    +--rw vrrp-instance* [vrid]
      +--rw vrid                               uint8
      |   ...
      +--rw track
        +--rw interfaces
          +--rw interface* [interface]
            +--rw interface                     if:interface-ref
            |   ...
          +--rw networks
            +--rw network* [prefix]
              +--rw prefix                       inet:ipv4-prefix
              |   ...
        +--rw virtual-ipv4-addresses
          +--rw virtual-ipv4-address* [ipv4-address]
            +--rw ipv4-address                 inet:ipv4-address

augment /if:interfaces/if:interface/ip:ipv6:
  +--rw vrrp
    +--rw vrrp-instance* [vrid]
      +--rw vrid                               uint8
      |   ...
      +--rw track
        +--rw interfaces
          +--rw interface* [interface]
            +--rw interface                     if:interface-ref
            |   ...
          +--rw networks
            +--rw network* [prefix]
              +--rw prefix                       inet:ipv6-prefix
              |   ...
        +--rw virtual-ipv6-addresses
          +--rw virtual-ipv6-address* [ipv6-address]
            +--rw ipv6-address                 inet:ipv6-address

```

Figure 2

The model allows the following protocol entities to be managed:

- \* VRRP instance (version 2 or 3), representing a VRRP router.
- \* Virtual IPv4 or IPv6 address associated with a virtual router.
- \* Tracking interface, to detect interface connectivity failures.
- \* Tracking network, to detect network connectivity failures.

## 2.4. Protocol States

The model structure for the protocol states is depicted in Figure 3.

```

module: ietf-vrrp
  +--ro vrrp
  |   // global operational states
  +--ro virtual-routers?   uint32
  +--ro interfaces?        uint32
  +--ro statistics          // global statistics
  |   +--ro discontinuity-datetime?   yang:date-and-time
  |   +--ro checksum-errors?          yang:counter64
  |   +--ro version-errors?           yang:counter64
  |   +--ro vrid-errors?              yang:counter64
  |   +--ro ip-ttl-errors?            yang:counter64
  augment /if:interfaces/if:interface/ip:ipv4:
    +--rw vrrp
    |   +--rw vrrp-instance* [vrid]
    |   |   +--rw vrid                               uint8
    |   |   |   ...
    |   +--rw track
    |   |   +--rw interfaces
    |   |   |   +--rw interface* [interface]
    |   |   |   |   +--rw interface                if:interface-ref
    |   |   |   |   |   ...
    |   |   +--rw networks
    |   |   |   +--rw network* [prefix]
    |   |   |   |   +--rw prefix                    inet:ipv4-prefix
    |   |   |   |   |   ...
    |   +--rw virtual-ipv4-addresses
    |   |   +--rw virtual-ipv4-address* [ipv4-address]
    |   |   |   +--rw ipv4-address                inet:ipv4-address
    |   |   |   |   ...
    |   // per-instance operational states
    +--ro state?                               identityref
    +--ro is-owner?                             boolean
    +--ro effective-priority?                   uint8
    +--ro last-adv-source?                     inet:ip-address
    +--ro up-datetime?                         yang:date-and-time
    +--ro active-down-interval?                uint32
    +--ro skew-time?                          uint32
    +--ro last-event?                         identityref
    +--ro new-active-reason?                   new-active-reason-type
    +--ro statistics                          // per-instance statistics
    |   +--ro discontinuity-datetime?   yang:date-and-time
    |   +--ro active-transitions?      yang:counter32
    |   +--ro advertisement-rcvd?      yang:counter64

```



```

    +--ro advertisement-sent?          yang:counter64
    +--ro interval-errors?             yang:counter64
    |   {validate-interval-errors}?
    +--ro priority-zero-pkts-rcvd?     yang:counter64
    +--ro priority-zero-pkts-sent?     yang:counter64
    +--ro invalid-type-pkts-rcvd?      yang:counter64
    +--ro address-list-errors?         yang:counter64
    |   {validate-address-list-errors}?
    +--ro packet-length-errors?        yang:counter64

augment /if:interfaces/if:interface/ip:ipv6:
  +--rw vrrp
    +--rw vrrp-instance* [vrid]
      +--rw vrid                                uint8
      + ...
    +--rw track
      | +--rw interfaces
      | | +--rw interface* [interface]
      | | +--rw interface                    if:interface-ref
      | | ...
      | +--rw networks
      | | +--rw network* [prefix]
      | | +--rw prefix                      inet:ipv6-prefix
      | | ...
    +--rw virtual-ipv6-addresses
      | +--rw virtual-ipv6-address* [ipv6-address]
      | +--rw ipv6-address                  inet:ipv6-address
      |
      | // per-instance operational states
    +--ro state?                            identityref
    +--ro is-owner?                         boolean
    +--ro effective-priority?               uint8
    +--ro last-adv-source?                  inet:ip-address
    +--ro up-datetime?                      yang:date-and-time
    +--ro active-down-interval?             uint32
    +--ro skew-time?                       uint32
    +--ro last-event?                      identityref
    +--ro new-active-reason?                new-active-reason-type
    +--ro statistics                        // per-instance statistics
      +--ro discontinuity-datetime?         yang:date-and-time
      +--ro active-transitions?             yang:counter32
      +--ro advertisement-rcvd?             yang:counter64
      +--ro advertisement-sent?             yang:counter64
      +--ro interval-errors?               yang:counter64
      |   {validate-interval-errors}?
      +--ro priority-zero-pkts-rcvd?        yang:counter64
      +--ro priority-zero-pkts-sent?        yang:counter64
      +--ro invalid-type-pkts-rcvd?         yang:counter64

```

```

+--ro address-list-errors?      yang:counter64
|      {validate-address-list-errors}?
+--ro packet-length-errors?     yang:counter64

```

Figure 3

This model conforms to the Network Management Datastore Architecture (NMDA) [RFC8342]. The operational state data is combined with the associated configuration data in the same hierarchy [I-D.ietf-netmod-rfc8407bis]. When protocol states are retrieved from the NMDA operational state datastore, the returned states cover all "config true" (rw) and "config false" (ro) nodes defined in the schema.

The model allows the retrieval of protocol states at the following levels:

- \* VRRP instance (version 2 or 3), representing a VRRP router.
- \* Virtual IPv4 or IPv6 address associated with a virtual router.
- \* Tracking interface, to detect interface connectivity failures.
- \* Tracking network, to detect network connectivity failures.
- \* Global states and statistics summarizing all instances.

## 2.5. Notifications

This model defines the following VRRP-specific notifications (Figure 4):

notifications:

```

+---n vrrp-new-active-event
|   +--ro active-ip-address      inet:ip-address
|   +--ro new-active-reason      new-active-reason-type
+---n vrrp-protocol-error-event
|   +--ro protocol-error-reason  identityref
+---n vrrp-virtual-router-error-event
|   +--ro interface              if:interface-ref
|   +--ro (ip-version)
|   |   +--:(ipv4)
|   |   |   +--ro ipv4
|   |   |   |   +--ro vrid      leafref
|   |   +--:(ipv6)
|   |   |   +--ro ipv6
|   |   |   |   +--ro vrid      leafref
|   +--ro virtual-router-error-reason  identityref

```

Figure 4

Each notification type is used to indicate a type of VRRP state change or error occurrence:

"vrrp-new-active-event" VRRP new active event, indicating that a new active virtual router has been elected.

"vrrp-protocol-error-event" VRRP protocol error event for a message that fails to reach a VRRP instance to be processed.

"vrrp-virtual-router-error-event" VRRP virtual router error event for a message processed on a VRRP instance.

In addition to the notifications specified above, the mechanisms defined in [RFC8639] and [RFC8641] can be used for other general notifications. These mechanisms currently allow the user to:

- \* Subscribe notifications on a per-client basis.
- \* Specify subtree filters or XML Path Language (XPath) filters so that only contents of interest will be sent.
- \* Specify either periodic or on-demand notifications.

### 3. Tree Structure

The VRRP YANG data model defined in this document has the following tree structure (Figure 5):

```

module: ietf-vrrp
  +--ro vrrp
    +--ro virtual-routers?    uint32
    +--ro interfaces?         uint32
    +--ro statistics
      +--ro discontinuity-datetime?  yang:date-and-time
      +--ro checksum-errors?         yang:counter64
      +--ro version-errors?          yang:counter64
      +--ro vrid-errors?             yang:counter64
      +--ro ip-ttl-errors?           yang:counter64
  augment /if:interfaces/if:interface/ip:ipv4:
    +--rw vrrp
      +--rw vrrp-instance* [vrid]
        +--rw vrid                               uint8
        +--rw version                             identityref
        +--rw log-state-change?                   boolean
        +--rw preempt

```

```

|   +-rw enabled?      boolean
|   +-rw hold-time?    uint16
+-rw priority?          uint8
+-rw accept-mode?       boolean
+-rw (advertise-interval-choice)?
|   +--:(v2)
|   |   +-rw advertise-interval-sec?          uint8
|   +--:(v3)
|   |   +-rw advertise-interval-centi-sec?    uint16
+-rw track
|   +-rw interfaces
|   |   +-rw interface* [interface]
|   |   |   +-rw interface          if:interface-ref
|   |   |   +-rw priority-decrement? uint8
|   +-rw networks
|   |   +-rw network* [prefix]
|   |   |   +-rw prefix              inet:ipv4-prefix
|   |   |   +-rw priority-decrement? uint8
+-rw virtual-ipv4-addresses
|   +-rw virtual-ipv4-address* [ipv4-address]
|   |   +-rw ipv4-address            inet:ipv4-address
+-ro state?                    identityref
+-ro is-owner?                  boolean
+-ro effective-priority?        uint8
+-ro last-adv-source?           inet:ip-address
+-ro up-datetime?               yang:date-and-time
+-ro active-down-interval?      uint32
+-ro skew-time?                 uint32
+-ro last-event?                identityref
+-ro new-active-reason?
new-active-reason-type
+-ro statistics
|   +-ro discontinuity-datetime? yang:date-and-time
|   +-ro active-transitions?     yang:counter32
|   +-ro advertisement-rcvd?     yang:counter64
|   +-ro advertisement-sent?     yang:counter64
|   +-ro interval-errors?        yang:counter64
|   |   {validate-interval-errors}?
|   +-ro priority-zero-pkts-rcvd? yang:counter64
|   +-ro priority-zero-pkts-sent? yang:counter64
|   +-ro invalid-type-pkts-rcvd? yang:counter64
|   +-ro address-list-errors?    yang:counter64
|   |   {validate-address-list-errors}?
|   +-ro packet-length-errors?   yang:counter64
augment /if:interfaces/if:interface/ip:ipv6:
+-rw vrrp
|   +-rw vrrp-instance* [vrid]
|   |   +-rw vrid                    uint8

```

```

+--rw version                               identityref
+--rw log-state-change?                     boolean
+--rw preempt
|   +--rw enabled?                          boolean
|   +--rw hold-time?                       uint16
+--rw priority?                            uint8
+--rw accept-mode?                         boolean
+--rw advertise-interval-centi-sec?        uint16
+--rw track
|   +--rw interfaces
|   |   +--rw interface* [interface]
|   |   |   +--rw interface                if:interface-ref
|   |   |   +--rw priority-decrement?      uint8
|   +--rw networks
|   |   +--rw network* [prefix]
|   |   |   +--rw prefix                   inet:ipv6-prefix
|   |   |   +--rw priority-decrement?      uint8
+--rw virtual-ipv6-addresses
|   +--rw virtual-ipv6-address* [ipv6-address]
|   |   +--rw ipv6-address                 inet:ipv6-address
+--ro state?                              identityref
+--ro is-owner?                           boolean
+--ro effective-priority?                  uint8
+--ro last-adv-source?                     inet:ip-address
+--ro up-datetime?                         yang:date-and-time
+--ro active-down-interval?                uint32
+--ro skew-time?                           uint32
+--ro last-event?                          identityref
+--ro new-active-reason?
new-active-reason-type
+--ro statistics
|   +--ro discontinuity-datetime?           yang:date-and-time
|   +--ro active-transitions?               yang:counter32
|   +--ro advertisement-rcvd?               yang:counter64
|   +--ro advertisement-sent?               yang:counter64
|   +--ro interval-errors?                  yang:counter64
|   |   {validate-interval-errors}?
|   +--ro priority-zero-pkts-rcvd?          yang:counter64
|   +--ro priority-zero-pkts-sent?          yang:counter64
|   +--ro invalid-type-pkts-rcvd?           yang:counter64
|   +--ro address-list-errors?              yang:counter64
|   |   {validate-address-list-errors}?
|   +--ro packet-length-errors?             yang:counter64

notifications:
+---n vrrp-new-active-event
|   +--ro active-ip-address                 inet:ip-address
|   +--ro new-active-reason                 new-active-reason-type

```

```

+---n vrrp-protocol-error-event
|   +--ro protocol-error-reason    identityref
+---n vrrp-virtual-router-error-event
    +--ro interface                  if:interface-ref
    +--ro (ip-version)
    |   +--:(ipv4)
    |   |   +--ro ipv4
    |   |   |   +--ro vrid        leafref
    |   +--:(ipv6)
    |   |   +--ro ipv6
    |   |   |   +--ro vrid        leafref
    +--ro virtual-router-error-reason    identityref

```

Figure 5

#### 4. YANG Module

This module references [RFC3768], [RFC9568], and [RFC6527].

```

<CODE BEGINS> file "ietf-vrrp@2026-02-13.yang"
module ietf-vrrp {
  yang-version 1.1;
  namespace "urn:ietf:params:xml:ns:yang:ietf-vrrp";
  prefix vrrp;

  import ietf-inet-types {
    prefix inet;
    reference
      "RFC 9911: Common YANG Data Types, Section 4";
  }
  import ietf-yang-types {
    prefix yang;
    reference
      "RFC 9911: Common YANG Data Types, Section 3";
  }
  import ietf-interfaces {
    prefix if;
    reference
      "RFC 8343: A YANG Data Model for Interface Management";
  }
  import ietf-ip {
    prefix ip;
    reference
      "RFC 8344: A YANG Data Model for IP Management";
  }

  organization
    "IETF Routing Area Working Group (RTGWG)";

```

## contact

"WG Web: <<https://datatracker.ietf.org/wg/rtgwg/>>  
WG List: <<mailto:rtgwg@ietf.org>>

Editor: Acee Lindem  
<<mailto:acee.ietf@gmail.com>>

Editor: Xufeng Liu  
<<mailto:xufeng.liu.ietf@gmail.com>>

Editor: Athanasios Kyparlis  
<[mailto:Athanasios\\_Kyparlis@jabil.com](mailto:Athanasios_Kyparlis@jabil.com)>

Editor: Ravi Parikh  
<<mailto:parikhr@vmware.com>>

Editor: Mingui Zhang  
<<mailto:zhangmingui@huawei.com>>" ;

## description

"This YANG module defines a model for managing Virtual Router Redundancy Protocol (VRRP) versions 2 and 3.

Copyright (c) 2026 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Revised BSD License set forth in Section 4.c of the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>).

All revisions of IETF and IANA published modules can be found at the YANG Parameters registry group (<https://www.iana.org/assignments/yang-parameters>).

The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'NOT RECOMMENDED', 'MAY', and 'OPTIONAL' in this document are to be interpreted as described in BCP 14 (RFC 2119) (RFC 8174) when, and only when, they appear in all capitals, as shown here.

This version of this YANG module is part of RFC XXXX; see the RFC itself for full legal notices." ;

revision 2026-02-13 {  
description

```
"This revision includes the following changes:
- Update some identifiers and descriptions to conform
  to the changes in RFC 9586
- Add a new effective-priority leaf
- Update some reference statements";
reference
  "RFC XXXX: A YANG Data Model for the Virtual Router Redundancy
    Protocol (VRRP)";
}
revision 2018-03-13 {
  description
    "Initial revision.";
  reference
    "RFC 8347: A YANG Data Model for the Virtual Router Redundancy
      Protocol (VRRP)";
}

/*
 * Features
 */

feature validate-interval-errors {
  description
    "This feature indicates that the system validates that the
    advertisement interval from advertisement packets received
    is the same as the interval configured for the local
    VRRP router.";
}

feature validate-address-list-errors {
  description
    "This feature indicates that the system validates that
    the address list from received packets matches the
    locally configured list for the VRRP router.";
}

/*
 * Typedefs
 */

typedef new-active-reason-type {
  type enumeration {
    enum not-active {
      description
        "The virtual router has never transitioned to active
        state.";
    }
    enum priority {
```



```
        description
            "Priority was higher.";
    }
    enum preempted {
        description
            "The active virtual router was preempted.";
    }
    enum no-response {
        description
            "Previous active virtual router did not respond.";
    }
}
description
    "Indicates why the virtual router has transitioned to
    active state.

    The identifier of this typedef is changed to reflect
    the updated terminology used in RFC 9568.";
} // new-active-reason-type

/*
 * Identities
 */
/* vrrp-event-type identity and its derivatives. */

identity vrrp-event-type {
    description
        "Indicates the type of a VRRP protocol event.";
}

identity vrrp-event-none {
    base vrrp-event-type;
    description
        "Indicates a non-meaningful event.";
}

identity vrrp-event-startup {
    base vrrp-event-type;
    description
        "Indicates that a VRRP router has initiated the protocol.";
}

identity vrrp-event-shutdown {
    base vrrp-event-type;
    description
        "Indicates that a VRRP router has closed down the protocol.";
}
```

```
identity vrrp-event-higher-priority-backup {
  base vrrp-event-type;
  description
    "Indicates that a backup router has a higher priority than
    the current active.";
}

identity vrrp-event-active-timeout {
  base vrrp-event-type;
  description
    "Indicates that the current active virtual router has not sent
    an advertisement within the limit of active-down-interval.

    The identity is changed to reflect the updated terminology
    used in RFC 9568.";
}

identity vrrp-event-interface-up {
  base vrrp-event-type;
  description
    "Indicates that the VRRP-enabled interface has become
    'operational up'.";
}

identity vrrp-event-interface-down {
  base vrrp-event-type;
  description
    "Indicates that the VRRP-enabled interface has become
    'operational down'.";
}

identity vrrp-event-no-primary-ip-address {
  base vrrp-event-type;
  description
    "Indicates that the primary IP address on the VRRP-enabled
    interface has become unavailable.";
}

identity vrrp-event-primary-ip-address {
  base vrrp-event-type;
  description
    "Indicates that the primary IP address on the VRRP-enabled
    interface has become available.";
}

identity vrrp-event-no-virtual-ip-addresses {
  base vrrp-event-type;
  description
```

```
    "Indicates that there are no virtual IP addresses on the
    virtual router.";
}

identity vrrp-event-virtual-ip-addresses {
    base vrrp-event-type;
    description
        "Indicates that there are virtual IP addresses on the
        virtual router.";
}

identity vrrp-event-preempt-hold-timeout {
    base vrrp-event-type;
    description
        "Indicates that the configured preemption hold time has
        passed.";
}

identity vrrp-event-lower-priority-active {
    base vrrp-event-type;
    description
        "Indicates that there is a lower-priority VRRP active router.

        The identity is changed to reflect the updated terminology
        used in RFC 9568.";
}

identity vrrp-event-owner-preempt {
    base vrrp-event-type;
    description
        "Indicates that the owner has preempted another virtual router
        to become the active virtual router.";
}

/* vrrp-error-global identity and its derivatives. */

identity vrrp-error-global {
    description
        "Indicates the type of a VRRP error that occurred
        for a packet before it reaches a VRRP router.";
}

identity checksum-error {
    base vrrp-error-global;
    description
        "A packet has been received with an invalid VRRP checksum
        value.";
}
```

```
identity ip-ttl-error {
  base vrrp-error-global;
  description
    "A packet has been received with IP TTL (Time-To-Live)
    not equal to 255.";
}

identity version-error {
  base vrrp-error-global;
  description
    "A packet has been received with an unknown or unsupported
    version number.";
}

identity vrid-error {
  base vrrp-error-global;
  description
    "A packet has been received with a Virtual Router Identifier
    (VRID) that is not valid for any virtual router on this
    router.";
}

/* vrrp-error-virtual-router identity and its derivatives. */

identity vrrp-error-virtual-router {
  description
    "Indicates the type of a VRRP error that occurred
    after a packet reaches a VRRP router.";
}

identity address-list-error {
  base vrrp-error-virtual-router;
  description
    "A packet has been received with an address list that
    does not match the locally configured address list for
    the virtual router.";
}

identity interval-error {
  base vrrp-error-virtual-router;
  description
    "A packet has been received with an advertisement interval
    different than the interval configured for the local
    virtual router.";
}

identity packet-length-error {
  base vrrp-error-virtual-router;
```

```
    description
      "A packet has been received with a packet length less
       than the length of the VRRP header.";
  }

/* vrrp-state-type identity and its derivatives. */

identity vrrp-state-type {
  description
    "Indicates the state of a virtual router.";
}

identity initialize {
  base vrrp-state-type;
  description
    "Indicates that the virtual router is waiting
     for a startup event.";
}

identity backup {
  base vrrp-state-type;
  description
    "Indicates that the virtual router is monitoring the
     availability of the active virtual router.";
}

identity active {
  base vrrp-state-type;
  description
    "Indicates that the virtual router is forwarding
     packets for IP addresses that are associated with
     this virtual router.

     The identity is changed to reflect the updated terminology
     used in RFC 9568.";
}

/* vrrp-version identity and its derivatives. */

identity vrrp-version {
  description
    "The version of VRRP.";
}

identity vrrp-v2 {
  base vrrp-version;
  description
    "Indicates version 2 of VRRP.";
```

```
}

identity vrrp-v3 {
  base vrrp-version;
  description
    "Indicates version 3 of VRRP.";
}

/*
 * Groupings
 */

grouping vrrp-common-attributes {
  description
    "Group of VRRP attributes common to versions 2 and 3.";
  leaf vrid {
    type uint8 {
      range "1..255";
    }
    description
      "Virtual Router ID (i.e., VRID).";
  }
  leaf version {
    type identityref {
      base vrrp:vrrp-version;
    }
    mandatory true;
    description
      "Version 2 or 3 of VRRP.";
  }
  leaf log-state-change {
    type boolean;
    default "false";
    description
      "Generates VRRP state change messages each time the
       VRRP instance changes state (from 'up' to 'down'
       or 'down' to 'up').";
  }
  container preempt {
    description
      "Enables a higher-priority VRRP backup router to preempt a
       lower-priority VRRP active router.";
    leaf enabled {
      type boolean;
      default "true";
      description
        "'true' if preemption is enabled.";
    }
  }
}
```

```
leaf hold-time {
  type uint16;
  units "seconds";
  default "0";
  description
    "Hold time, in seconds, for which a higher-priority VRRP
    backup router must wait before preempting a lower-priority
    VRRP active router.";
}
}
leaf priority {
  type uint8 {
    range "1..254";
  }
  default "100";
  description
    "Configures the VRRP election priority for the backup
    virtual router.";
}
leaf accept-mode {
  when "derived-from-or-self(current()/../version,
    'vrrp:vrrp-v3')" {
    description
      "Applicable only to version 3.";
  }
  type boolean;
  default "false";
  description
    "Controls whether a virtual router in active state will
    accept packets addressed to the address owner's IPvX address
    as its own if it is not the IPvX address owner. The default
    is 'false'. Deployments that rely on, for example, pinging
    the address owner's IPvX address may wish to configure
    accept-mode to 'true'.

    Note: IPv6 Neighbor Solicitations and Neighbor
    Advertisements MUST NOT be dropped when accept-mode
    is 'false'.";
}
} // vrrp-common-attributes

grouping vrrp-ipv4-attributes {
  description
    "Group of VRRP attributes for IPv4.";
  uses vrrp-common-attributes;
  choice advertise-interval-choice {
    description
      "The options for the advertisement interval at which VRRPv2
```

```
    or VRRPv3 advertisements are sent from the specified
    interface.";
case v2 {
  when "derived-from-or-self(version, 'vrrp:vrrp-v2')" {
    description
      "Applicable only to version 2.";
  }
  leaf advertise-interval-sec {
    type uint8 {
      range "1..254";
    }
    units "seconds";
    default "1";
    description
      "Configures the interval that VRRPv2 advertisements
      are sent from the specified interface.";
  }
}
case v3 {
  when "derived-from-or-self(version, 'vrrp:vrrp-v3')" {
    description
      "Applicable only to version 3.";
  }
  leaf advertise-interval-centi-sec {
    type uint16 {
      range "1..4095";
    }
    units "centiseconds";
    default "100";
    description
      "Configures the interval that VRRPv3 advertisements
      are sent from the specified interface.";
  }
}
} // advertise-interval-choice
container track {
  description
    "Enables the specified VRRP instance to track interfaces
    or networks.";
  container interfaces {
    description
      "Enables the specified VRRPv2 or VRRPv3 instance to track
      interfaces. Interface tracking prevents traffic loss by
      detecting the availability of interfaces. The operational
      states of other interfaces are associated with the
      priority of a VRRP router. When a tracked interface
      becomes unavailable (or 'operational down'), the priority
      of the VRRP router decrements. When an unavailable
```



```
        interface becomes available again, the priority of the
        VRRP router is incremented by the same amount.";
list interface {
    key "interface";
    description
        "Interface to track.";
    leaf interface {
        type if:interface-ref;
        must '/if:interfaces/if:interface[if:name=current()]/'
            + 'ip:ipv4' {
            description
                "Interface is IPv4.";
        }
        description
            "Interface to track.";
    }
    leaf priority-decrement {
        type uint8 {
            range "1..254";
        }
        default "10";
        description
            "Specifies how much to decrement the priority of the
            VRRP instance if the interface goes down.";
    }
} // interface
} // interfaces
container networks {
    description
        "Enables the VRRPv2 or VRRPv3 router instance to track the
        specified networks through their IPv4 network prefixes.
        Network tracking prevents traffic loss by detecting
        network connectivity failure. The states of
        connectivity to some networks are associated with the
        priority of a VRRP router. When connectivity to a
        tracked network represented by its prefix is lost, the
        priority of the VRRP router decrements. When an
        unavailable network is again reachable, the priority of
        the VRRP router is incremented by the same amount.";
    list network {
        key "prefix";
        description
            "Enables the specified VRRPv2 or VRRPv3 instance to
            track an IPv4 network by specifying the prefix of the
            IPv4 network.";
        leaf prefix {
            type inet:ipv4-prefix;
            description
```

```
        "The IPv4 prefix of the network to track.";
    }
    leaf priority-decrement {
        type uint8 {
            range "1..254";
        }
        default "10";
        description
            "Specifies how much to decrement the priority of the
             VRRP router if there is a failure in the IPv4
             network.";
    }
} // network
} // networks
} // track
container virtual-ipv4-addresses {
    description
        "Configures the virtual IPv4 address for the
         VRRP interface.";
    list virtual-ipv4-address {
        key "ipv4-address";
        max-elements 16;
        description
            "Virtual IPv4 addresses for a single VRRP instance. For a
             VRRP owner router, the virtual address must match one
             of the IPv4 addresses configured on the interface
             corresponding to the virtual router.";
        leaf ipv4-address {
            type inet:ipv4-address;
            description
                "An IPv4 address associated with a virtual router.";
            reference
                "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
                 Version 3 for IPv4 and IPv6, Section 1.3";
        }
    } // virtual-ipv4-address
} // virtual-ipv4-addresses
} // vrrp-ipv4-attributes

grouping vrrp-ipv6-attributes {
    description
        "Group of VRRP attributes for IPv6.";
    uses vrrp-common-attributes;
    leaf advertise-interval-centi-sec {
        type uint16 {
            range "1..4095";
        }
        units "centiseconds";
    }
}
```

```
    default "100";
    description
      "Includes the interval that VRRPv3 advertisements
       are sent from the specified interface.";
  }
  container track {
    description
      "Enables the specified VRRP instance to track interfaces
       or networks.";
    container interfaces {
      description
        "Enables the specified VRRPv2 or VRRPv3 instance to track
         interfaces. Interface tracking prevents traffic loss by
         detecting the availability of interfaces. The operational
         states of other interfaces are associated with the
         priority of a VRRP router. When a tracked interface
         becomes unavailable (or 'operational down'), the priority
         of the VRRP router decrements. When an unavailable
         interface becomes available again, the priority of the
         VRRP router is incremented by the same amount.";
      list interface {
        key "interface";
        description
          "Interface to track.";
        leaf interface {
          type if:interface-ref;
          must '/if:interfaces/if:interface[if:name=current()]/'
            + 'ip:ipv6' {
            description
              "Interface is IPv6.";
          }
          description
            "Interface to track.";
        }
        leaf priority-decrement {
          type uint8 {
            range "1..254";
          }
          default "10";
          description
            "Specifies how much to decrement the priority of the
             VRRP instance if the interface goes down.";
        }
      } // interface
    } // interfaces
    container networks {
      description
        "Enables the VRRPv2 or VRRPv3 router instance to track the
```

specified networks through their IPv6 network prefixes. Network tracking prevents traffic loss by detecting network connectivity failure. The states of connectivity to some networks are associated with the priority of a VRRP router. When connectivity to a tracked network represented by its prefix is lost, the priority of the VRRP router decrements. When an unavailable network is again reachable, the priority of the VRRP router is incremented by the same amount.";

```
list network {
  key "prefix";
  description
    "Enables the specified VRRPv2 or VRRPv3 instance to
    track an IPv6 network by specifying the prefix of the
    IPv6 network.";
  leaf prefix {
    type inet:ipv6-prefix;
    description
      "The IPv6 prefix of the network to track.";
  }
  leaf priority-decrement {
    type uint8 {
      range "1..254";
    }
    default "10";
    description
      "Specifies how much to decrement the priority of the
      VRRP router if there is a failure in the IPv6
      network.";
  }
} // network
} // networks
} // track
container virtual-ipv6-addresses {
  description
    "Configures the virtual IPv6 address for the
    VRRP interface.";
  list virtual-ipv6-address {
    key "ipv6-address";
    max-elements 2;
    description
      "Two IPv6 addresses are allowed. The first address must
      be a link-local address. The second address can be a
      link-local or global address.";
    leaf ipv6-address {
      type inet:ipv6-address;
      description
        "An IPv6 address associated with a virtual router.";
```

```
        reference
          "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
            Version 3 for IPv4 and IPv6, Section 1.4";
      }
    } // virtual-ipv6-address
  } // virtual-ipv6-addresses
} // vrrp-ipv6-attributes

grouping vrrp-state-attributes {
  description
    "Group of VRRP state attributes.";
  leaf state {
    type identityref {
      base vrrp:vrrp-state-type;
    }
    config false;
    description
      "Operational state.";
  }
  leaf is-owner {
    type boolean;
    config false;
    description
      "Set to 'true' if this virtual router is the owner.";
  }
  leaf effective-priority {
    type uint8 {
      range "1..255";
    }
    config false;
    description
      "The effect priority of the virtual router taking account
        address ownership and any modifications due to
        local policy.";
  }
  leaf last-adv-source {
    type inet:ip-address;
    config false;
    description
      "Last advertised IPv4/IPv6 source address.";
  }
  leaf up-datetime {
    type yang:date-and-time;
    config false;
    description
      "The date and time when this virtual router
        transitioned out of 'init' state.";
  }
}
```

```
leaf active-down-interval {
  type uint32;
  units "centiseconds";
  config false;
  description
    "Time interval for the backup virtual router to declare
    'active down'."

    The identifier of this leaf is changed to reflect
    the updated terminology used in RFC 9568.";
}
leaf skew-time {
  type uint32;
  units "microseconds";
  config false;
  description
    "Calculated based on the priority and advertisement
    interval configuration command parameters. See RFC 9568.";
}
leaf last-event {
  type identityref {
    base vrrp:vrrp-event-type;
  }
  config false;
  description
    "Last reported event.";
}
leaf new-active-reason {
  type new-active-reason-type;
  config false;
  description
    "Indicates why the virtual router has transitioned to
    active state."

    The identifier of this leaf is changed to reflect
    the updated terminology used in RFC 9568.";
}
container statistics {
  config false;
  description
    "VRRP statistics.";
  leaf discontinuity-datetime {
    type yang:date-and-time;
    description
      "The time on the most recent occasion at which any one or
      more of the VRRP statistics counters suffered a
      discontinuity. If no such discontinuities have occurred
      since the last re-initialization of the local management
```

```
        subsystem, then this node contains the time that the
        local management subsystem re-initialized itself.";
    }
    leaf active-transitions {
        type yang:counter32;
        description
            "The total number of times that this virtual router's
            state has transitioned to 'Active'."

            The identifier of this leaf is changed to reflect
            the updated terminology used in RFC 9568.";
    }
    leaf advertisement-rcvd {
        type yang:counter64;
        description
            "The total number of VRRP advertisements received by
            this virtual router.";
    }
    leaf advertisement-sent {
        type yang:counter64;
        description
            "The total number of VRRP advertisements sent by
            this virtual router.";
    }
    leaf interval-errors {
        if-feature "validate-interval-errors";
        type yang:counter64;
        description
            "The total number of VRRP advertisement packets received
            with an advertisement interval different than the
            interval configured for the local virtual router.";
    }
    leaf priority-zero-pkts-rcvd {
        type yang:counter64;
        description
            "The total number of VRRP packets received by the
            virtual router with a priority of 0.";
    }
    leaf priority-zero-pkts-sent {
        type yang:counter64;
        description
            "The total number of VRRP packets sent by the
            virtual router with a priority of 0.";
    }
    leaf invalid-type-pkts-rcvd {
        type yang:counter64;
        description
            "The number of VRRP packets received by the virtual
```

```
        router with an invalid value in the 'type' field.";
    }
    leaf address-list-errors {
        if-feature "validate-address-list-errors";
        type yang:counter64;
        description
            "The total number of packets received with an
             address list that does not match the locally
             configured address list for the virtual router.";
    }
    leaf packet-length-errors {
        type yang:counter64;
        description
            "The total number of packets received with a packet
             length less than the length of the VRRP header.";
    }
} // statistics
} // vrrp-state-attributes

grouping vrrp-global-state-attributes {
    description
        "Group of VRRP global state attributes.";
    leaf virtual-routers {
        type uint32;
        description
            "Number of configured virtual routers.";
    }
    leaf interfaces {
        type uint32;
        description
            "Number of interfaces with VRRP configured.";
    }
    container statistics {
        description
            "VRRP global statistics.";
        leaf discontinuity-datetime {
            type yang:date-and-time;
            description
                "The time on the most recent occasion at which any
                 one or more of checksum-errors, version-errors,
                 vrid-errors, or ip-ttl-errors suffered a
                 discontinuity.

                 If no such discontinuities have occurred since the last
                 re-initialization of the local management subsystem,
                 then this node contains the time that the local management
                 subsystem re-initialized itself.";
        }
    }
}
```



```
leaf checksum-errors {
  type yang:counter64;
  description
    "The total number of VRRP packets received with an invalid
    VRRP checksum value.";
  reference
    "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
    Version 3 for IPv4 and IPv6, Section 5.2.8.";
}
leaf version-errors {
  type yang:counter64;
  description
    "The total number of VRRP packets received with an unknown
    or unsupported version number.";
  reference
    "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
    Version 3 for IPv4 and IPv6, Section 5.2.1.";
}
leaf vrid-errors {
  type yang:counter64;
  description
    "The total number of VRRP packets received with a VRID that
    is not valid for any virtual router on this router.";
  reference
    "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
    Version 3 for IPv4 and IPv6, Section 5.2.3.";
}
leaf ip-ttl-errors {
  type yang:counter64;
  description
    "The total number of VRRP packets received by the
    virtual router with IP TTL (IPv4) or Hop Limit (IPv6)
    not equal to 255.";
  reference
    "RFC 9568: Virtual Router Redundancy Protocol (VRRP)
    Version 3 for IPv4 and IPv6,
    Sections 5.1.1.3 and 5.1.2.3";
}
} // statistics
} // vrrp-global-state-attributes

/*
 * Configuration data and operational state data nodes
 */

augment "/if:interfaces/if:interface/ip:ipv4" {
  description
    "Augments IPv4 interface.";
```

```
    container vrrp {
      description
        "Configures VRRP version 2 or 3 for IPv4.";
      list vrrp-instance {
        key "vrid";
        description
          "Defines a virtual router, identified by a VRID, within the
          IPv4 address space.";
        uses vrrp-ipv4-attributes;
        uses vrrp-state-attributes;
      }
    }
  } // augments ipv4

  augment "/if:interfaces/if:interface/ip:ipv6" {
    description
      "Augments IPv6 interface.";
    container vrrp {
      description
        "Configures VRRP version 3 for IPv6.";
      list vrrp-instance {
        must "derived-from-or-self(version, 'vrrp-v3')" {
          description
            "IPv6 is only supported by version 3.";
        }
        key "vrid";
        description
          "Defines a virtual router, identified by a VRID, within the
          IPv6 address space.";
        uses vrrp-ipv6-attributes;
        uses vrrp-state-attributes;
      }
    }
  } // augments ipv6

  container vrrp {
    config false;
    description
      "VRRP data at the global level.";
    uses vrrp-global-state-attributes;
  }

  /*
   * Notifications
   */

  notification vrrp-new-active-event {
    description
```

"Notification event for the election of a new VRRP active router.

The identifier of the notification is changed to reflect the updated terminology used in RFC 9568.";

```
leaf active-ip-address {
  type inet:ip-address;
  mandatory true;
  description
    "IPv4 or IPv6 address of the new VRRP active router.

    The identifier of the leaf is changed to
    reflect the updated terminology used in RFC 9568.";
}
```

```
leaf new-active-reason {
  type new-active-reason-type;
  mandatory true;
  description
    "Indicates why the virtual router has transitioned to
    active state.

    The identifier of the leaf is changed to
    reflect the updated terminology used in RFC 9568.";
}
```

```
notification vrrp-protocol-error-event {
  description
    "Notification event for a VRRP protocol error.";
  leaf protocol-error-reason {
    type identityref {
      base vrrp:vrrp-error-global;
    }
    mandatory true;
    description
      "Indicates the reason for the protocol error.";
  }
}
```

```
notification vrrp-virtual-router-error-event {
  description
    "Notification event for an error that happened on a
    virtual router.";
  leaf interface {
    type if:interface-ref;
    mandatory true;
    description
      "Indicates the interface on which the event has occurred.";
  }
}
```

```
}
choice ip-version {
  mandatory true;
  description
    "The error may have happened on either an IPv4 virtual
    router or an IPv6 virtual router. The information
    related to a specific IP version is provided by one of
    the following cases.";
  case ipv4 {
    description
      "IPv4.";
    container ipv4 {
      description
        "Error information for IPv4.";
      leaf vrid {
        type leafref {
          path "/if:interfaces/if:interface"
            + "[if:name = current()/../../vrrp:interface]/"
            + "ip:ipv4/vrrp:vrrp/vrrp:vrrp-instance/vrrp:vrid";
        }
        mandatory true;
        description
          "Indicates the virtual router on which the event has
          occurred.";
      }
    }
  }
  case ipv6 {
    description
      "IPv6.";
    container ipv6 {
      description
        "Error information for IPv6.";
      leaf vrid {
        type leafref {
          path "/if:interfaces/if:interface"
            + "[if:name = current()/../../vrrp:interface]/"
            + "ip:ipv6/vrrp:vrrp/vrrp:vrrp-instance/vrrp:vrid";
        }
        mandatory true;
        description
          "Indicates the virtual router on which the event has
          occurred.";
      }
    }
  }
}
leaf virtual-router-error-reason {
```

```
    type identityref {  
      base vrrp:vrrp-error-virtual-router;  
    }  
    mandatory true;  
    description  
      "Indicates the reason for the virtual router error.";  
  }  
}  
}  
<CODE ENDS>
```

## 5. IANA Considerations

IANA is requested to update the following registration in the "ns" registry within the "IETF XML Registry" group [RFC3688] to reference this document:

```
URI: urn:ietf:params:xml:ns:yang:ietf-vrrp  
Registrant Contact: The IESG.  
XML: N/A, the requested URI is an XML namespace.
```

IANA is requested to update the following YANG module in the "YANG Module Names" registry [RFC6020] within the "YANG Parameters" registry group to reference this document:

```
Name: ietf-vrrp  
Maintained by IANA? N  
Namespace: urn:ietf:params:xml:ns:yang:ietf-vrrp  
Prefix: vrrp  
Reference: RFC XXXX
```

## 6. Operations and Management Considerations

This document defines YANG data model [RFC7950] for the VRRP protocol [RFC9568]. Hence, the entire document can be considered devoted to operations and management.

### 6.1. Migration Path

The changes to use inclusive language (Section 1.1) are non-backward compatibly based on the rules in [RFC7950]. However, there are no existing implementations of the ietf-vrrp YANG module based on numerous implementation polls. Hence, it was agreed upon to change the YANG data nodes with non-inclusive language in a single iteration rather than going through the deprecation, obsolescence, and removal cycle.

## 7. Security Considerations

This section is modeled after the template described in Section 3.7 of [I-D.ietf-netmod-rfc8407bis].

The "ietf-vrrp" YANG module defines a data model that is designed to be accessed via YANG-based management protocols, such as NETCONF [RFC6241] and RESTCONF [RFC8040]. These YANG-based protocols (1) have to use a secure transport layer (e.g., SSH [RFC4252], TLS [RFC8446], and QUIC [RFC9000]) and (2) have to use mutual authentication.

The Network Configuration Access Control Model (NACM) [RFC8341] provides the means to restrict access for particular NETCONF or RESTCONF users to a preconfigured subset of all available NETCONF or RESTCONF protocol operations and content.

There are a number of data nodes defined in this YANG module that are writable/creatable/deletable (i.e., "config true", which is the default). All writable data nodes are likely to be reasonably sensitive or vulnerable in some network environments. Write operations (e.g., edit-config) and delete operations to these data nodes without proper protection or authentication can have a negative effect on network operations. The following subtrees and data nodes have particular sensitivities/vulnerabilities:

/if:interfaces/if:interface/ip:ipv4/vrrp:vrrp/vrrp:vrrp-instance

/if:interfaces/if:interface/ip:ipv6/vrrp:vrrp/vrrp:vrrp-instance

Unauthorized access to any data node of these subtrees can adversely affect the routing subsystem of both the local device and the network. This may lead to network malfunctions, delivery of packets to inappropriate destinations, and other problems.

Some of the readable data nodes in this YANG module may be considered sensitive or vulnerable in some network environments. It is thus important to control read access (e.g., via get, get-config, or notification) to these data nodes. Specifically, the following subtrees and data nodes have particular sensitivities/vulnerabilities:

/ietf-vrrp:vrrp

/if:interfaces/if:interface/ip:ipv4/vrrp:vrrp/vrrp:vrrp-instance

/if:interfaces/if:interface/ip:ipv6/vrrp:vrrp/vrrp:vrrp-instance

Unauthorized access to any data node of these subtrees can disclose the operational state information of VRRP on this device.

## 8. Acknowledgments

Thanks to Nicola Serafini for his suggestion to add effective-priority to the virtual router operational state.

Thanks to Med Boucadair for an extensive review and suggested edits.

Thanks to Carlos Pignataro for review and comments.

Thanks to Yingzhen Qu for review and comments.

## 9. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3768] Hinden, R., Ed., "Virtual Router Redundancy Protocol (VRRP)", RFC 3768, DOI 10.17487/RFC3768, April 2004, <<https://www.rfc-editor.org/info/rfc3768>>.
- [RFC6527] Tata, K., "Definitions of Managed Objects for Virtual Router Redundancy Protocol Version 3 (VRRPv3)", RFC 6527, DOI 10.17487/RFC6527, March 2012, <<https://www.rfc-editor.org/info/rfc6527>>.
- [RFC7950] Bjorklund, M., Ed., "The YANG 1.1 Data Modeling Language", RFC 7950, DOI 10.17487/RFC7950, August 2016, <<https://www.rfc-editor.org/info/rfc7950>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8341] Bierman, A. and M. Bjorklund, "Network Configuration Access Control Model", STD 91, RFC 8341, DOI 10.17487/RFC8341, March 2018, <<https://www.rfc-editor.org/info/rfc8341>>.
- [RFC8342] Bjorklund, M., Schoenwaelder, J., Shafer, P., Watsen, K., and R. Wilton, "Network Management Datastore Architecture (NMDA)", RFC 8342, DOI 10.17487/RFC8342, March 2018, <<https://www.rfc-editor.org/info/rfc8342>>.

- [RFC8343] Bjorklund, M., "A YANG Data Model for Interface Management", RFC 8343, DOI 10.17487/RFC8343, March 2018, <<https://www.rfc-editor.org/info/rfc8343>>.
- [RFC8344] Bjorklund, M., "A YANG Data Model for IP Management", RFC 8344, DOI 10.17487/RFC8344, March 2018, <<https://www.rfc-editor.org/info/rfc8344>>.
- [RFC8347] Liu, X., Ed., Kyparlis, A., Parikh, R., Lindem, A., and M. Zhang, "A YANG Data Model for the Virtual Router Redundancy Protocol (VRRP)", RFC 8347, DOI 10.17487/RFC8347, March 2018, <<https://www.rfc-editor.org/info/rfc8347>>.
- [RFC9568] Lindem, A. and A. Dogra, "Virtual Router Redundancy Protocol (VRRP) Version 3 for IPv4 and IPv6", RFC 9568, DOI 10.17487/RFC9568, April 2024, <<https://www.rfc-editor.org/info/rfc9568>>.
- [RFC9911] Schindler, J., Ed., "Common YANG Data Types", RFC 9911, DOI 10.17487/RFC9911, December 2025, <<https://www.rfc-editor.org/info/rfc9911>>.

## 10. Informative References

- [I-D.ietf-netmod-rfc8407bis]  
Bierman, A., Boucadair, M., and Q. Wu, "Guidelines for Authors and Reviewers of Documents Containing YANG Data Models", Work in Progress, Internet-Draft, draft-ietf-netmod-rfc8407bis-28, 5 June 2025, <<https://datatracker.ietf.org/doc/html/draft-ietf-netmod-rfc8407bis-28>>.
- [IANA\_IF\_TYPE]  
IANA, "iana-if-types YANG Module", <<https://www.iana.org/assignments/iana-if-type/iana-if-type.xhtml>>.
- [RFC4252] Ylonen, T. and C. Lonvick, Ed., "The Secure Shell (SSH) Authentication Protocol", RFC 4252, DOI 10.17487/RFC4252, January 2006, <<https://www.rfc-editor.org/info/rfc4252>>.
- [RFC6020] Bjorklund, M., Ed., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", RFC 6020, DOI 10.17487/RFC6020, October 2010, <<https://www.rfc-editor.org/info/rfc6020>>.



- [RFC6241] Enns, R., Ed., Bjorklund, M., Ed., Schoenwaelder, J., Ed., and A. Bierman, Ed., "Network Configuration Protocol (NETCONF)", RFC 6241, DOI 10.17487/RFC6241, June 2011, <<https://www.rfc-editor.org/info/rfc6241>>.
- [RFC7951] Lhotka, L., "JSON Encoding of Data Modeled with YANG", RFC 7951, DOI 10.17487/RFC7951, August 2016, <<https://www.rfc-editor.org/info/rfc7951>>.
- [RFC8040] Bierman, A., Bjorklund, M., and K. Watsen, "RESTCONF Protocol", RFC 8040, DOI 10.17487/RFC8040, January 2017, <<https://www.rfc-editor.org/info/rfc8040>>.
- [RFC8340] Bjorklund, M. and L. Berger, Ed., "YANG Tree Diagrams", BCP 215, RFC 8340, DOI 10.17487/RFC8340, March 2018, <<https://www.rfc-editor.org/info/rfc8340>>.
- [RFC8446] Rescorla, E., "The Transport Layer Security (TLS) Protocol Version 1.3", RFC 8446, DOI 10.17487/RFC8446, August 2018, <<https://www.rfc-editor.org/info/rfc8446>>.
- [RFC8639] Voit, E., Clemm, A., Gonzalez Prieto, A., Nilsen-Nygaard, E., and A. Tripathy, "Subscription to YANG Notifications", RFC 8639, DOI 10.17487/RFC8639, September 2019, <<https://www.rfc-editor.org/info/rfc8639>>.
- [RFC8641] Clemm, A. and E. Voit, "Subscription to YANG Notifications for Datastore Updates", RFC 8641, DOI 10.17487/RFC8641, September 2019, <<https://www.rfc-editor.org/info/rfc8641>>.
- [RFC9000] Iyengar, J., Ed. and M. Thomson, Ed., "QUIC: A UDP-Based Multiplexed and Secure Transport", RFC 9000, DOI 10.17487/RFC9000, May 2021, <<https://www.rfc-editor.org/info/rfc9000>>.

## Appendix A. Data Tree Example

This section contains an example of an instance data tree in JSON encoding [RFC7951], containing both configuration and state data. (This example includes "iana-if-type", which is defined in [IANA\_IF\_TYPE].)

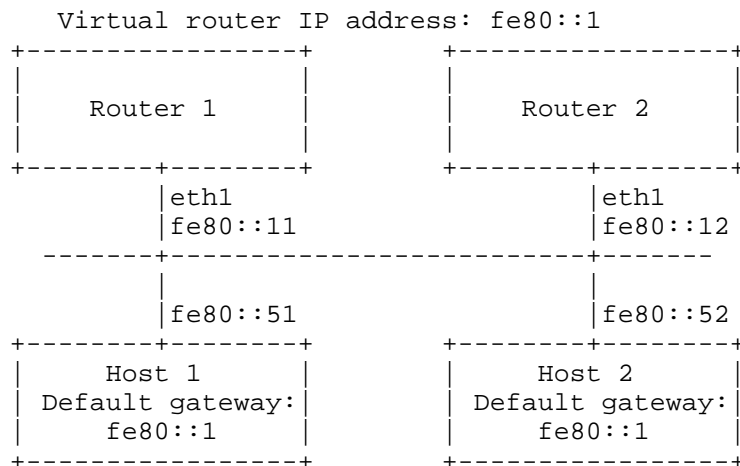


Figure 6

The configuration instance data for Router 1 in Figure 6 could be shown in Figure 7:

```

{
  "ietf-interfaces:interfaces": {
    "interface": [
      {
        "name": "eth1",
        "description": "An interface with VRRP enabled.",
        "type": "iana-if-type:ethernetCsmacd",
        "ietf-ip:ipv6": {
          "address": [
            {
              "ip": "2001:db8:0:1::1",
              "prefix-length": 64
            },
            {
              "ip": "fe80::11",
              "prefix-length": 64
            }
          ],
          "forwarding": true,
          "ietf-vrrp:vrrp": {
            "vrrp-instance": [
              {
                "vrid": 1,
                "version": "ietf-vrrp:vrrp-v3",
                "priority": 200,
                "advertise-interval-centi-sec": 50,
                "virtual-ipv6-addresses": {
                  "virtual-ipv6-address": [
                    {
                      "ipv6-address": "fe80::1"
                    }
                  ]
                }
              }
            ]
          }
        }
      ]
    }
  }
}

```

Figure 7

The corresponding operational state data for Router 1 could be shown in Figure 8:

```
{
  "ietf-interfaces:interfaces": {
    "interface": [
      {
        "name": "eth1",
        "description": "An interface with VRRP enabled.",
        "type": "iana-if-type:ethernetCsmacd",
        "phys-address": "00:00:5e:00:53:01",
        "oper-status": "up",
        "statistics": {
          "discontinuity-time": "2016-10-24T17:11:27+02:00"
        },
        "ietf-ip:ipv6": {
          "forwarding": true,
          "mtu": 1500,
          "address": [
            {
              "ip": "2001:db8:0:1::1",
              "prefix-length": 64,
              "origin": "static",
              "status": "preferred"
            },
            {
              "ip": "fe80::1",
              "prefix-length": 64,
              "origin": "static",
              "status": "preferred"
            }
          ]
        }
      },
      {
        "ietf-vrrp:vrrp": {
          "vrrp-instance": [
            {
              "vrid": 1,
              "version": "ietf-vrrp:vrrp-v3",
              "log-state-change": false,
              "preempt": {
                "enabled": true,
                "hold-time": 0
              },
              "priority": 200,
              "accept-mode": false,
              "advertise-interval-centi-sec": 50,
              "virtual-ipv6-addresses": {
                "virtual-ipv6-address": [
                  "ipv6-address": "fe80::1"
                ]
              },
              "state": "active",
            }
          ]
        }
      }
    ]
  }
}
```

```

        "is-owner": false,
        "effective-priority": 200,
        "last-adv-source": "fe80::11",
        "up-datetime": "2016-10-24T17:11:27+02:00",
        "active-down-interval": 161,
        "skew-time": 11,
        "last-event": "vrrp-event-interface-up",
        "new-active-reason": "priority",
        "statistics": {
            "discontinuity-datetime":
                "2016-10-24T17:11:27+02:00",
            "active-transitions": 2,
            "advertisement-rcvd": 20,
            "advertisement-sent": 12,
            "interval-errors": 0,
            "priority-zero-pkts-rcvd": 0,
            "priority-zero-pkts-sent": 0,
            "invalid-type-pkts-rcvd": 0,
            "address-list-errors": 0,
            "packet-length-errors": 1
        }
    }
}

{
    "ietf-vrrp:vrrp": {
        "virtual-routers": 3,
        "interfaces": 2,
        "statistics": {
            "discontinuity-datetime": "2016-10-24T17:11:27+02:00",
            "checksum-errors": 2,
            "version-errors": 0,
            "vrid-errors": 0,
            "ip-ttl-errors": 1
        }
    }
}

```

Figure 8

Authors' Addresses

Acee Lindem (editor)  
Arrcus, Inc.  
301 Midenhall Way  
Cary, NC 27513  
United States of America  
Email: [acee.ietf@gmail.com](mailto:acee.ietf@gmail.com)

Xufeng Liu  
Individual  
United States of America  
Email: [xufeng.liu.ietf@gmail.com](mailto:xufeng.liu.ietf@gmail.com)

Athanasios Kyparlis  
Jabil  
8281 Greensboro Drive, Suite 200  
McLean, VA 22102  
United States of America  
Email: [Athanasios\\_Kyparlis@jabil.com](mailto:Athanasios_Kyparlis@jabil.com)

Ravi Parikh  
Zoox  
United States of America  
Email: [parikh\\_ravi@ymail.com](mailto:parikh_ravi@ymail.com)

Mingui Zhang  
China Tower  
9 Dongranbeijie Haidian District  
Beijing  
China  
Email: [zhangmg3@chinatowercom.cn](mailto:zhangmg3@chinatowercom.cn)